IP Apartment Video Intercom With Face Recognition

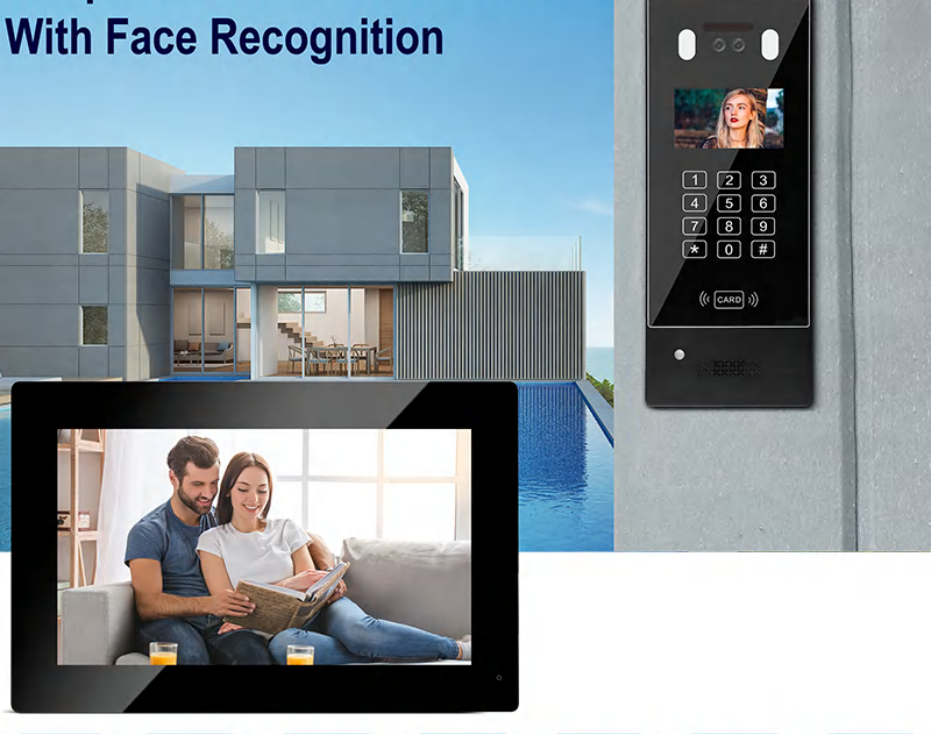

Enter Room no to Call
Touch Screen
Monitoring
130°Wide Angle
Snapshot
Night Vision
1080P HD Camera 2MP
Security Alarm
Multi Language
Call Monitor
Dual-way Call/Talk
Unlock Door
IP Waterproof
Face Recognition

Suitable For Various Environments

Apartment
Building
Office
Hotel

Four specifications are available

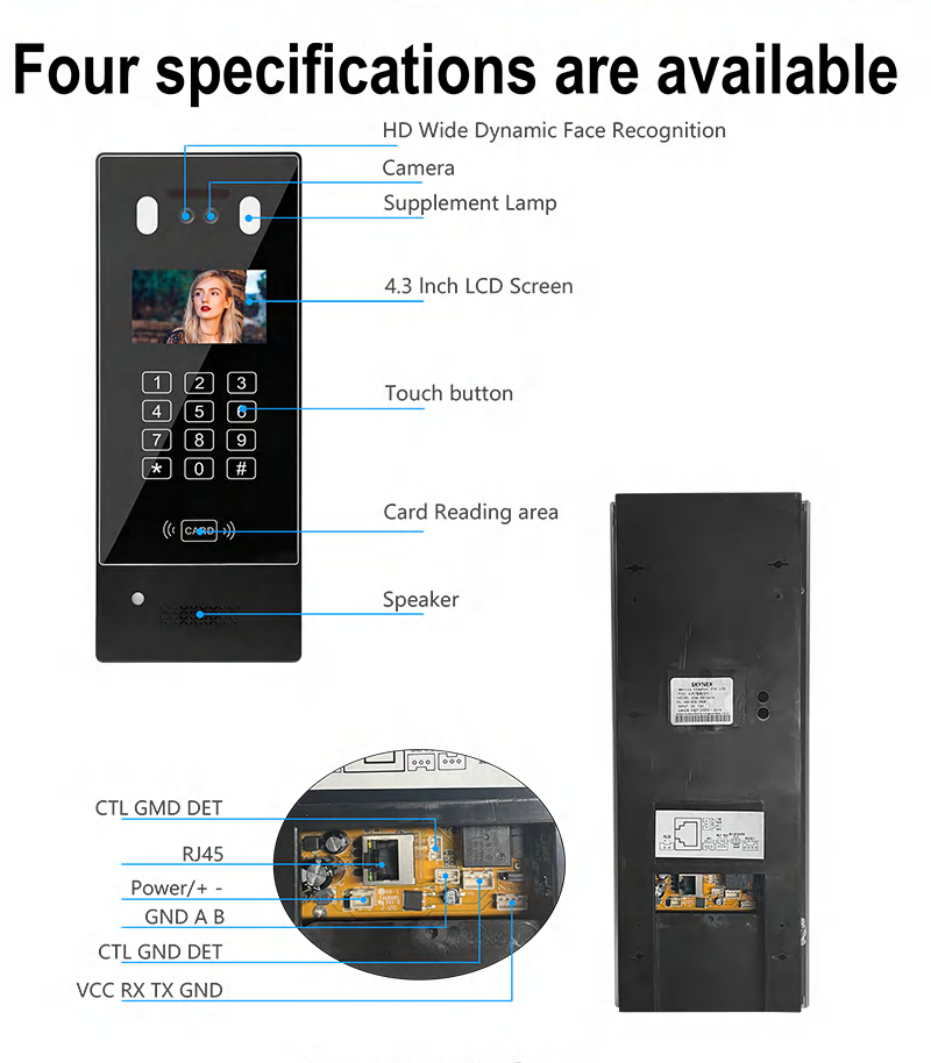
HD Wide Dynamic Face Recognition
Camera
Supplement Lamp
4.3 Inch LCD Screen
Touch button
Card Reading area
Speaker
CTL GMD DET
RJ45
Power/+ -
GND A B
CTL GND DET
VCC RX TX GND

Product Size

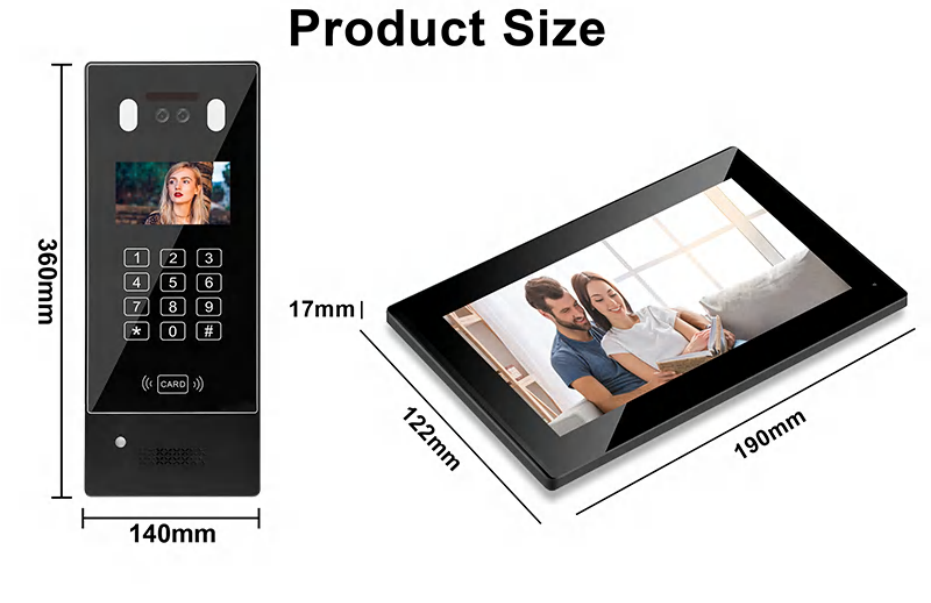
360mm
140mm
17mm
122mm
190mm

IP 7 Inch Indoor Monitor (Black and White)

Multi Language
Touch Screen
Snapshot
Dual-way Call/Talk
Monitoring
Security Alarm

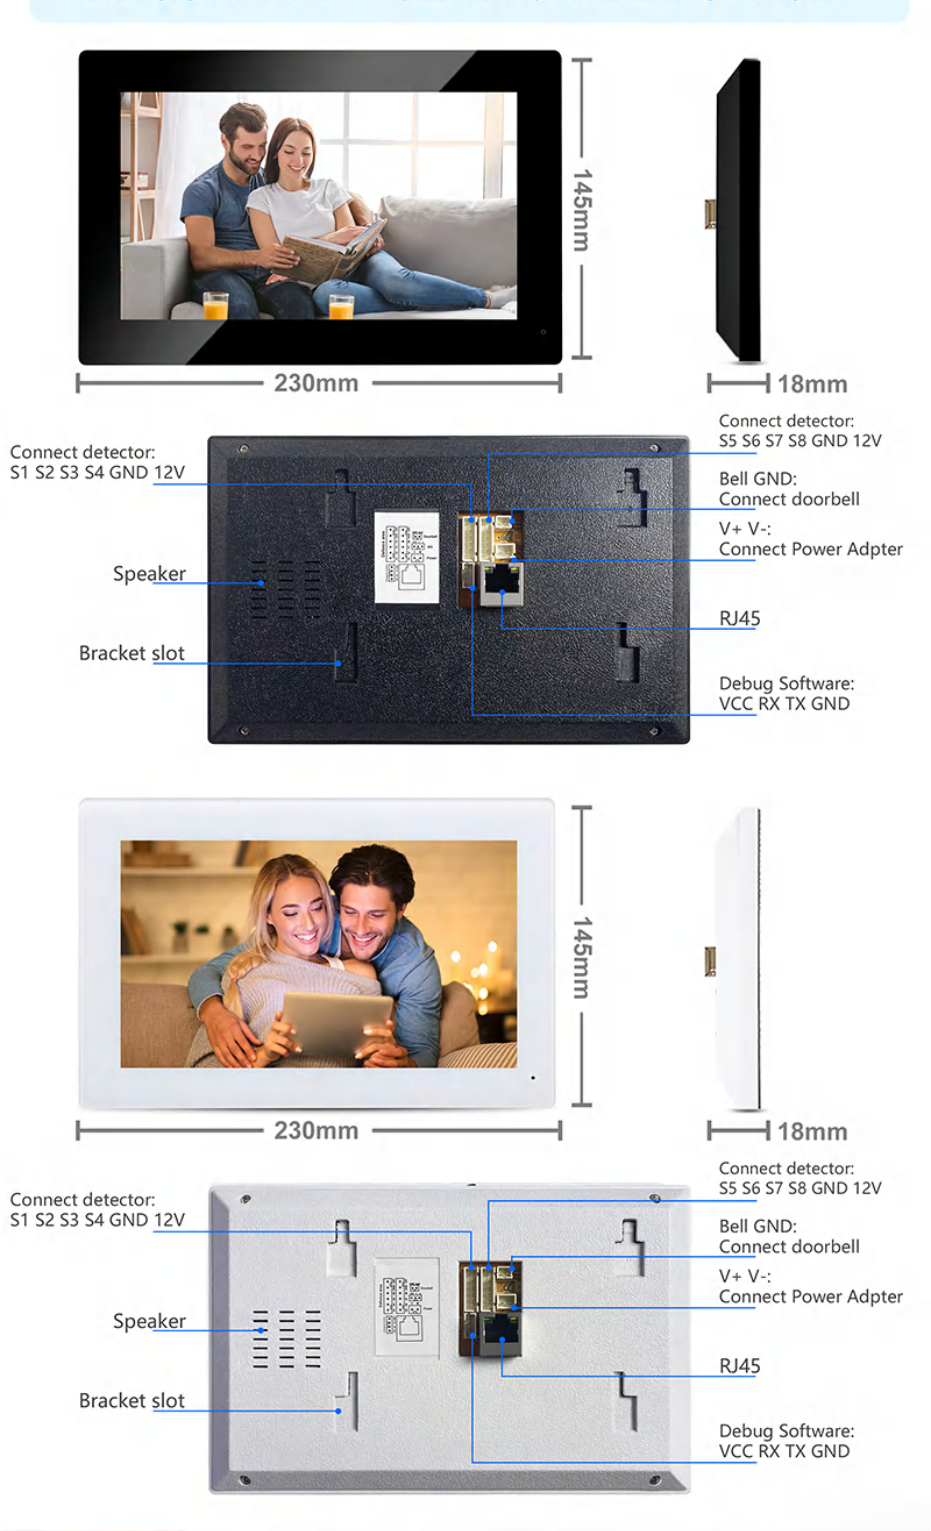
145mm
230mm
18mm
Connect detector: S1 S2 S3 S4 GND 12V
Speaker
Bracket slot
Connect detector: S5 S6 S7 S8 GND 12V
Bell GND: Connect doorbell
V+ V-: Connect Power Adpter
RJ45
Debug Software: VCC RX TX GND
145mm
230mm
18mm
Connect detector: S1 S2 S3 S4 GND 12V
Speaker
Bracket slot
Connect detector: S5 S6 S7 S8 GND 12V
Bell GND: Connect doorbell
V+ V-: Connect Power Adpter
RJ45
Debug Software: VCC RX TX GND

Dual Way Intercom / Unlock

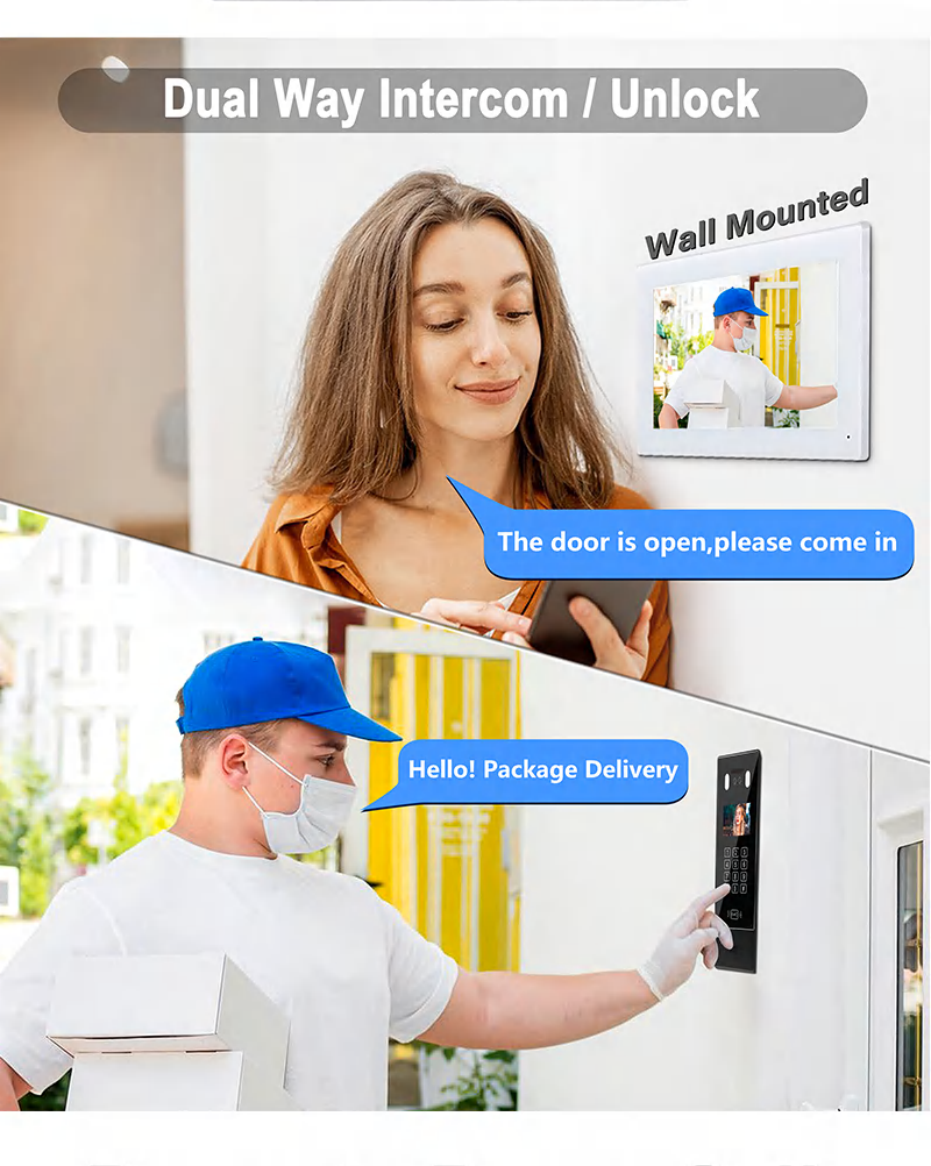
Wall Mounted
The door is open,please come in
Hello! Package Delivery

Room to Room Call

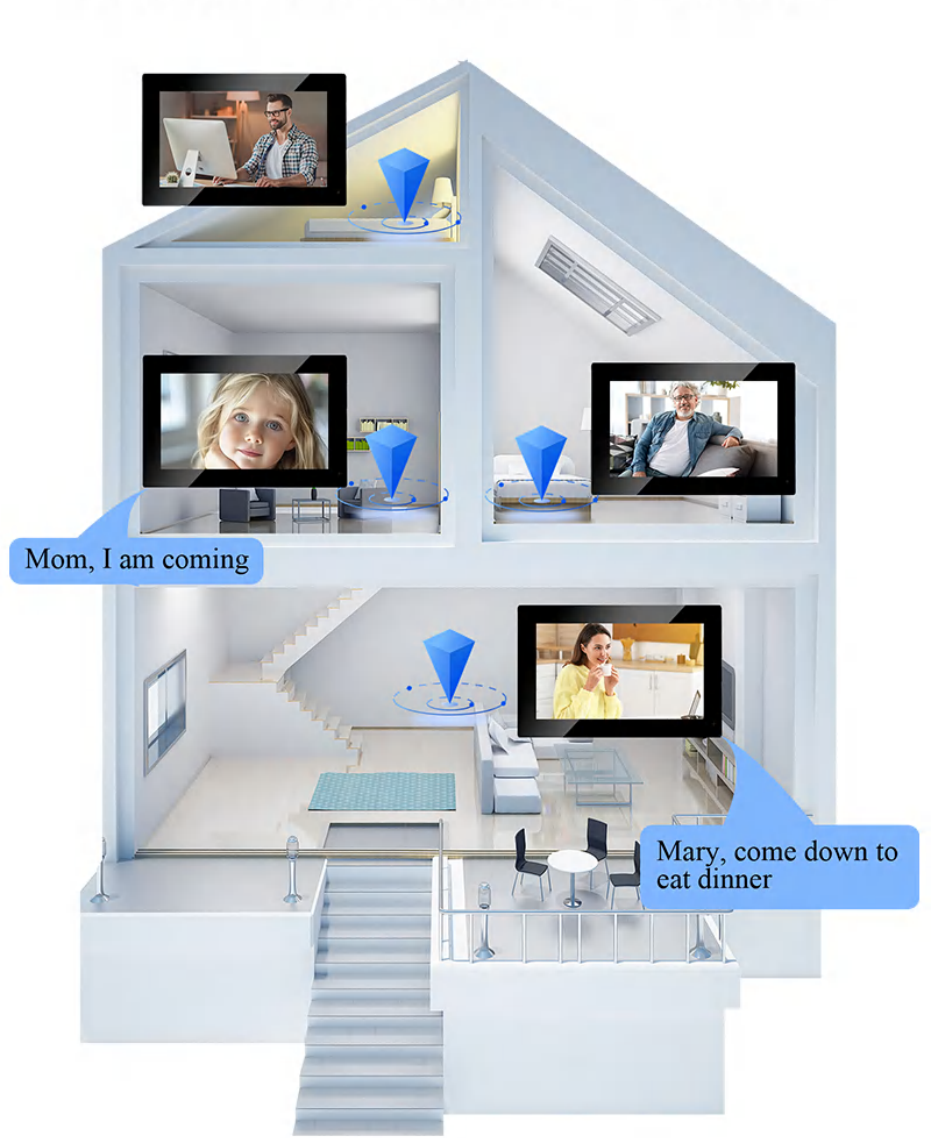
Mom, I am coming
Mary, come down to eat dinner

Flat to Flat Call

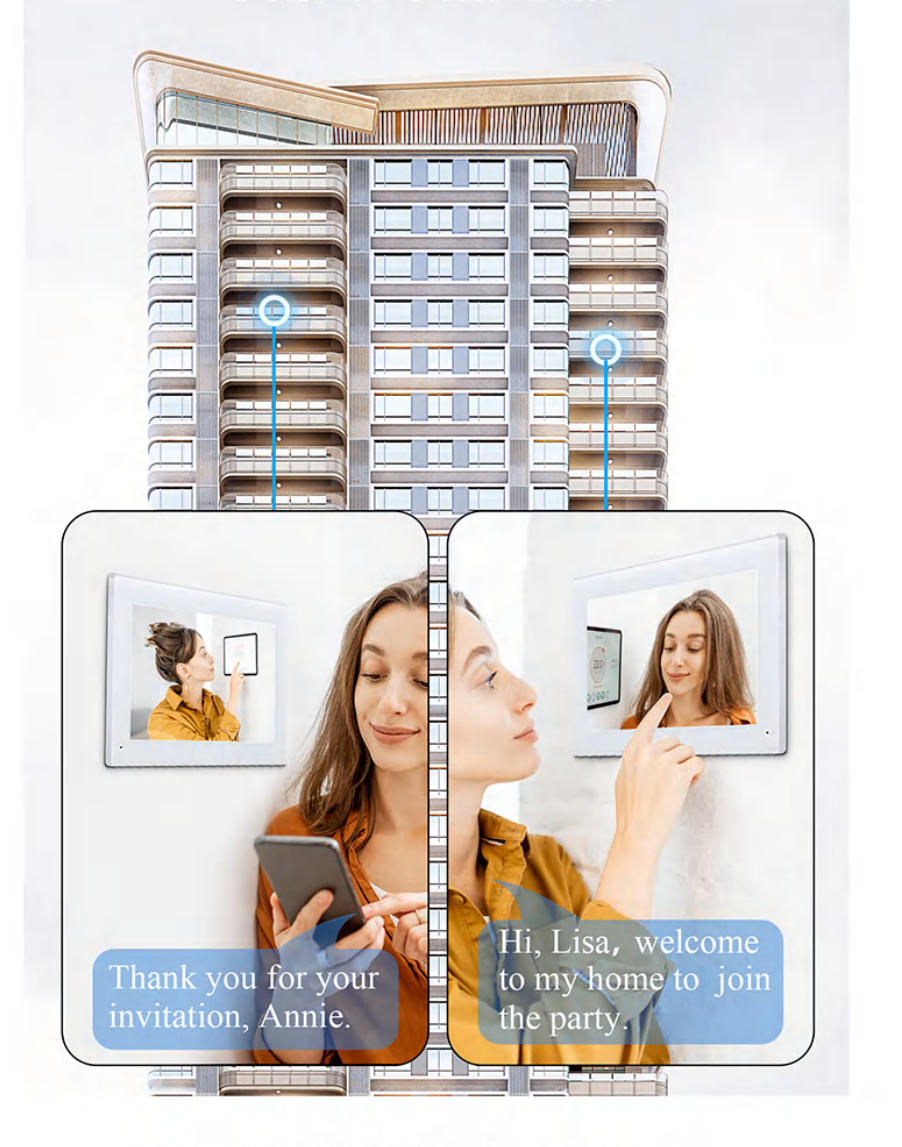
Thank you for your invitation, Annie.
Hi, Lisa, welcome to my home to join the party.

Multi Unlock Ways

Swipe Card Unlock
Administrator Guard Station Unlock
PC Software Unlock
Public Password Unlock
Enter unlock password:
666666
Enter six-digit password + "#"
Clear or return: Press "*"
Indoor Monitor Unlock
Private Password Unlock
Enter room number:
123456
Enter unlock password:
123456
Please enter room number + "#" first
Then enter six-digit resident password + "#"
Clear or return: Press "*"
Face Recognition unlock

1080P 2MP HD Camera With Night Vision

Day Vision
Night Vision

1080P 2MP HD Camera

1080P
1200TVL
800TVL

Weather Protection And Durable Use

IP waterproof
Dustproof
Weatherproof
Low & High Temperature: -40°C~+70°C

Low And High Temperature Working

PC Management And Guard Station Manage

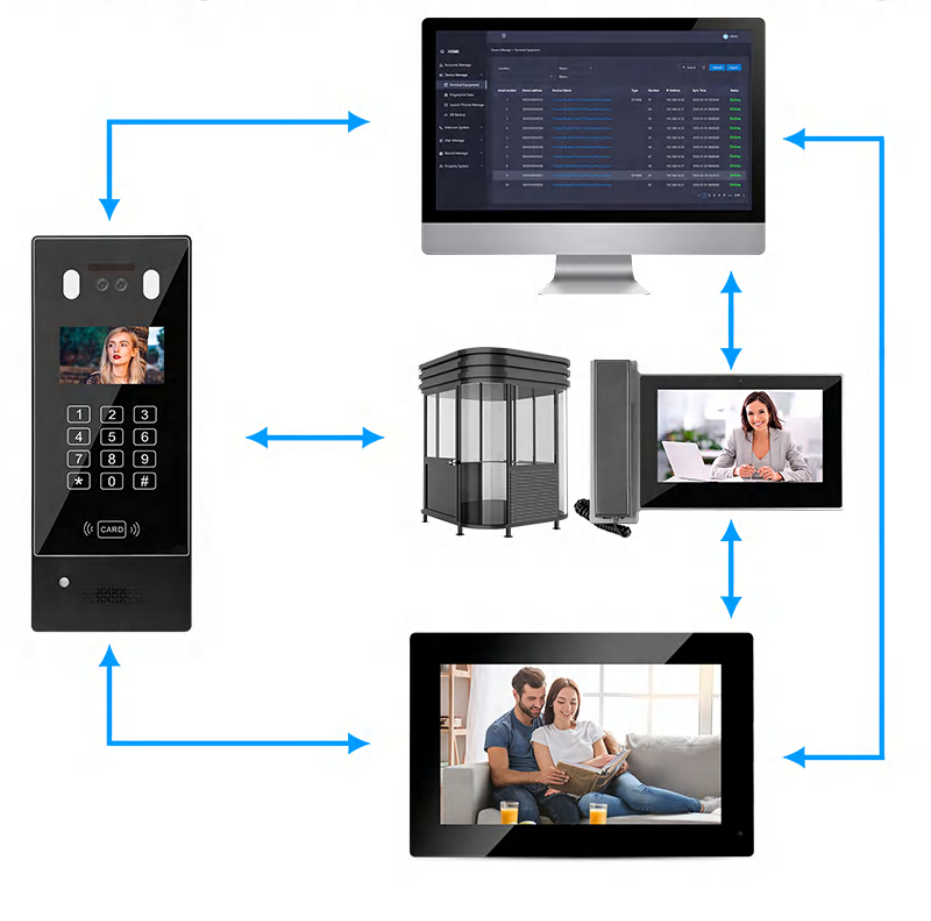

Multi Working Mode

At Home Mode

When visitor input the room number to call, indoor monitor and mobile phone will ring to remind resident to check who is calling and talk with him. Then click the unlock button to open the door.

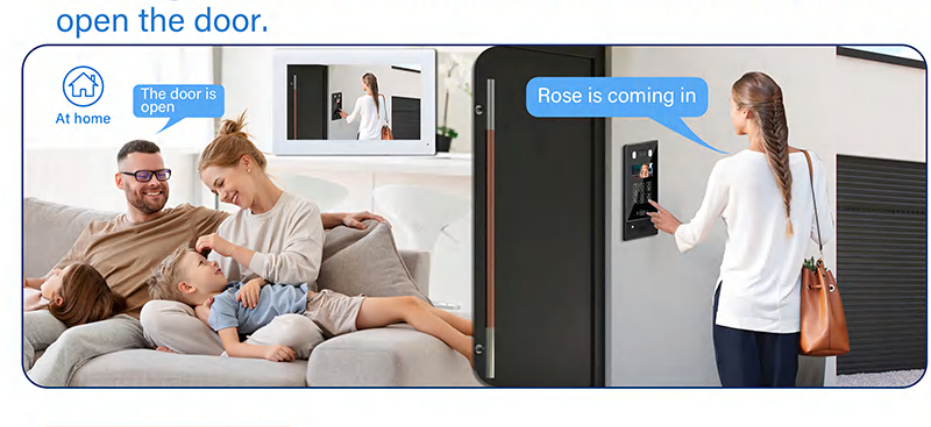
At home
The door is open
Rose is coming in

Sleep Mode

The resident can click mute button if somebody call you at night. It won't bother you if you open mute mode.

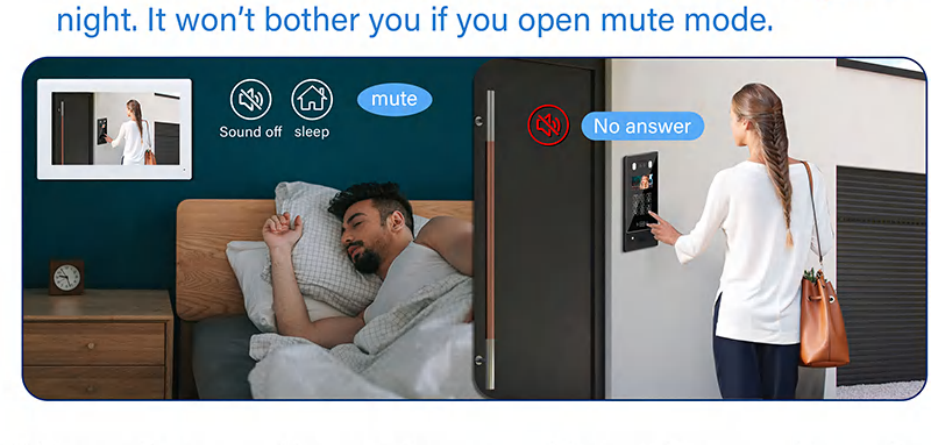
Sound off
sleep
mute
No answer

Monitor Outdoor Station And CCTV Camera Monitor

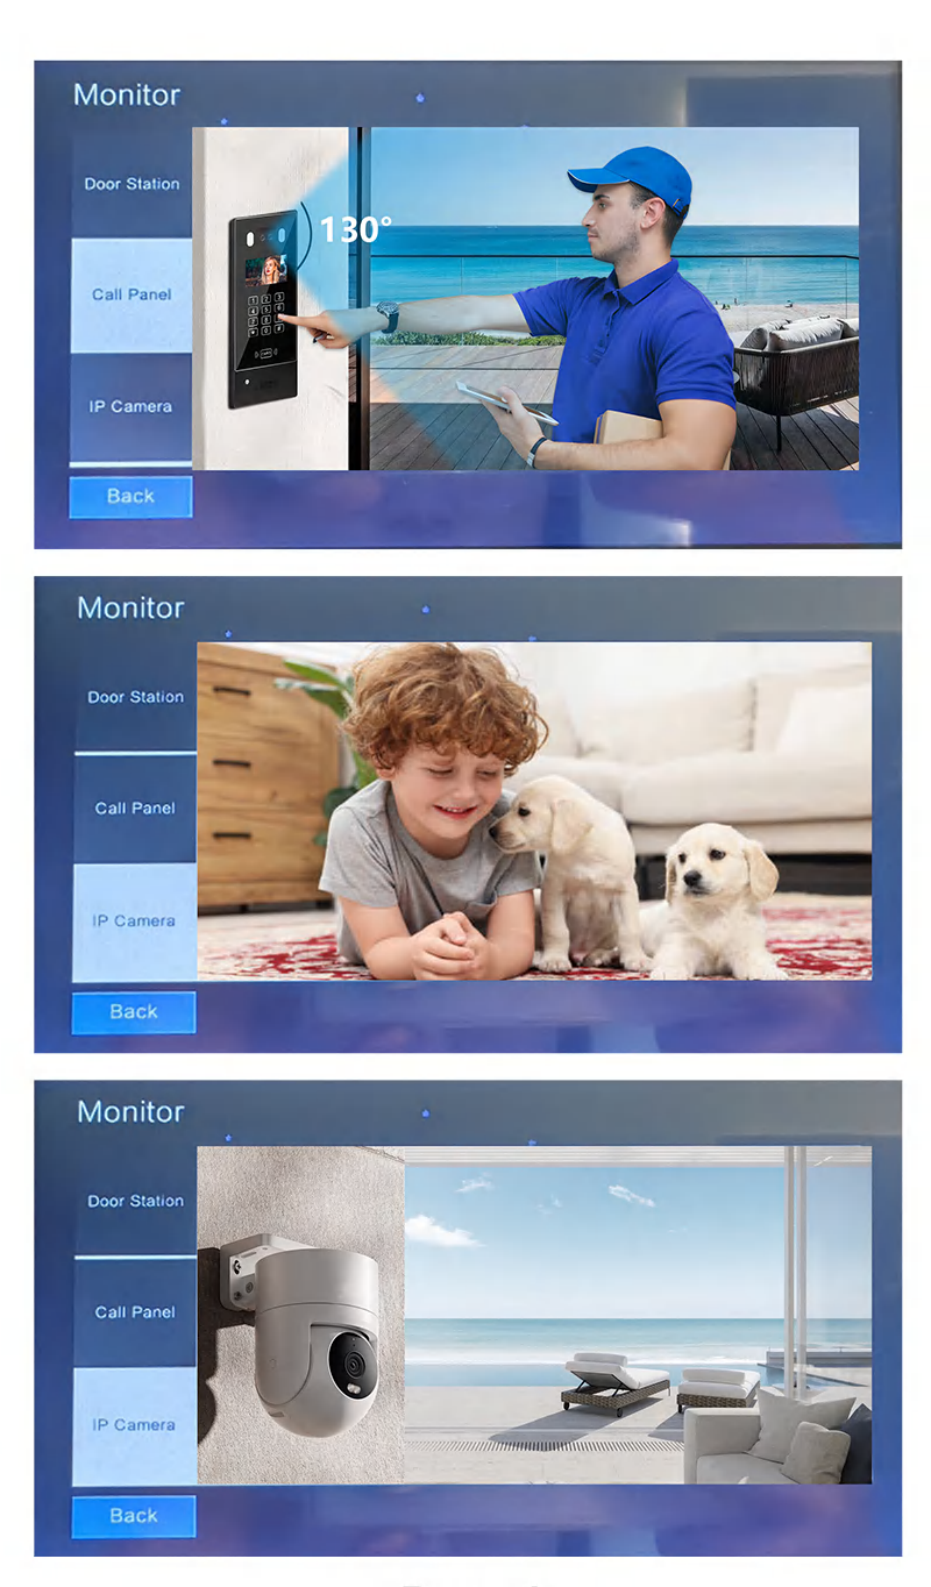
Monitor
Door Station
Call Panel
IP Camera
Back
130°
Monitor
Door Station
Call Panel
IP Camera
Back
Monitor
Door Station
Call Panel
IP Camera
Back

Record

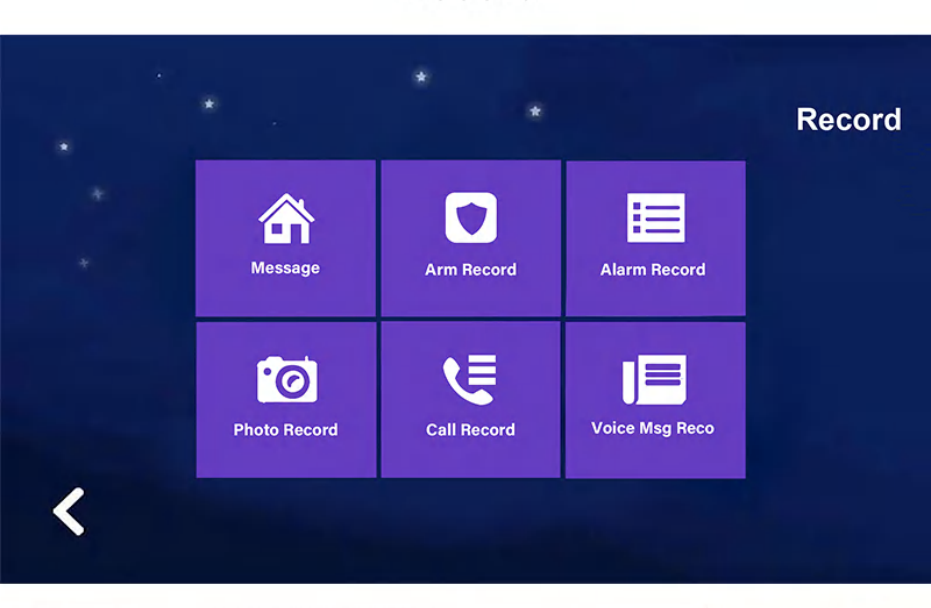
Record
Message
Arm Record
Alarm Record
Photo Record
Call Record
Voice Msg Reco

Security And Alarm 8 Defense Zones

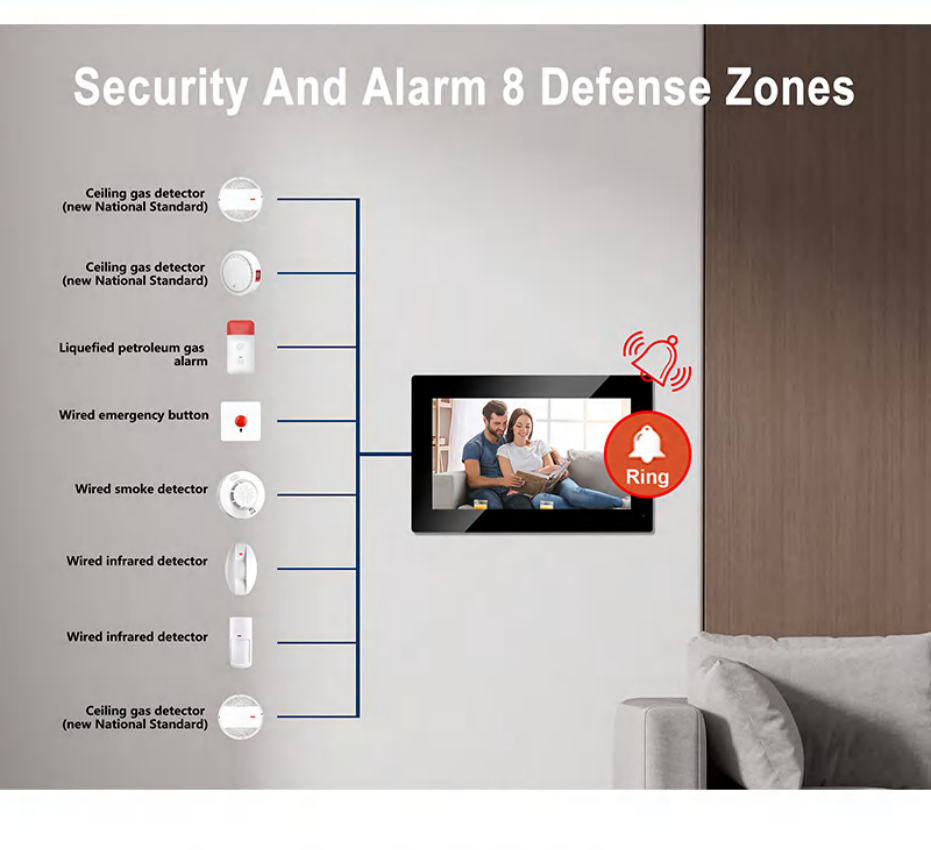
Ceiling gas detector (new National Standard)
Ceiling gas detector (new National Standard)
Liquefied petroleum gas alarm
Wired emergency button
Wired smoke detector
Wired infrared detector
Wired infrared detector
Ceiling gas detector (new National Standard)
Ring

Accessories For Mounting

User Manual

Outdoor Station Installation

Drilling
Drill screw holes in the location of the wall mounting plate

Fix mounting box
Use glue or sealant to firmly bond the box to the wall.

Install outdoor station
Insert the outdoor station to the plate and fasten it with a screw.

Indoor Monitor Installation

Drilling
In the reserved hole on the wall, drill screw holes in the location of the wall mounting plate

Fix wall mounting plate
Fix the wall mounting plate to the wall with 2 screws

Hook indoor monitor
Hook the indoor monitor to the wall mounting plate tightly

Certification CE/FCC/RoHS, etc

UI And Language Can Be Customized

UI Interface
Multi Language

Customize Your Logo For Free If Over 200 Pcs

Your Logo
Your Logo

IP System-Apartment 1 to 1 Diagram

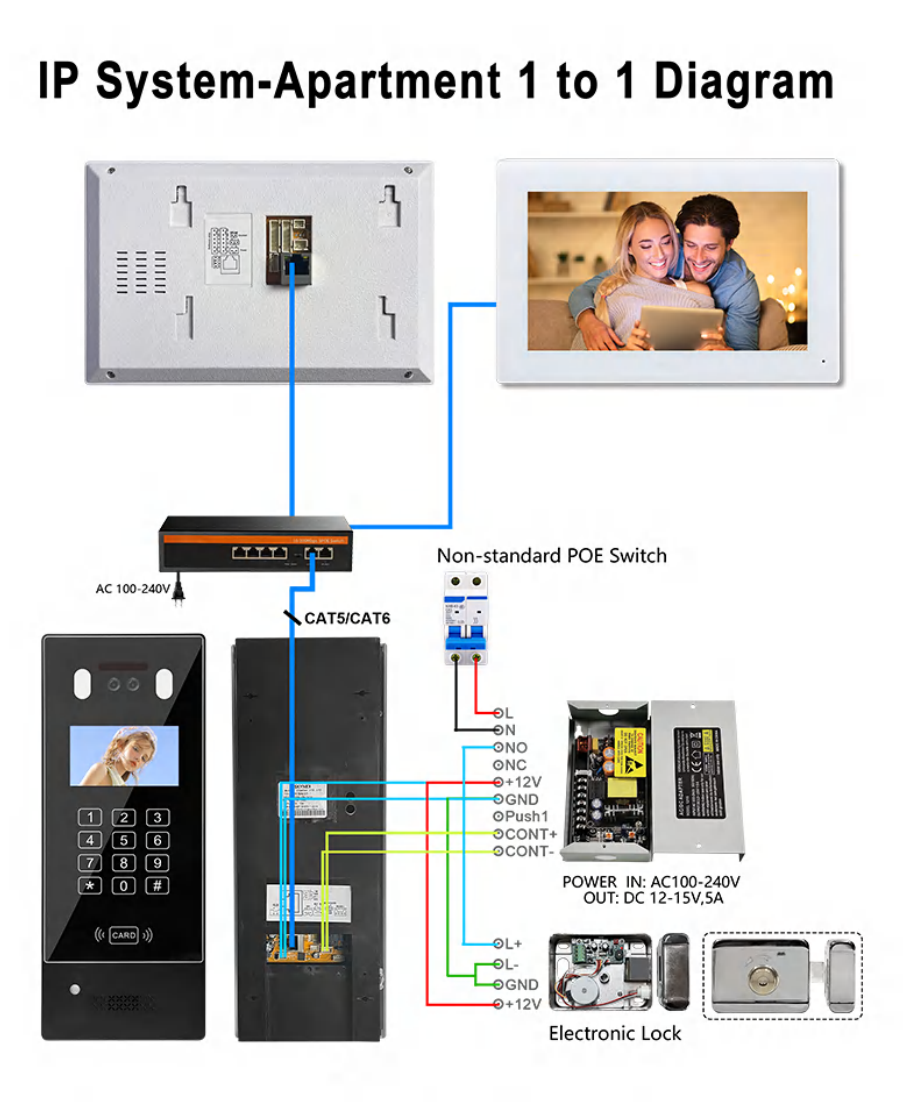
AC 100-240V
CAT5/CAT6
Non-standard POE Switch
L
N
ONO
ONC
+12V
GND
Push1
CONT+
CONT-
POWER IN: AC100-240V
OUT: DC 12-15V,5A
DL+
DL-
GND
+12V
Electronic Lock

IP Apartment Video Intercom Normal System Diagram

Support connect up 1-9999 pcs indoor monitor

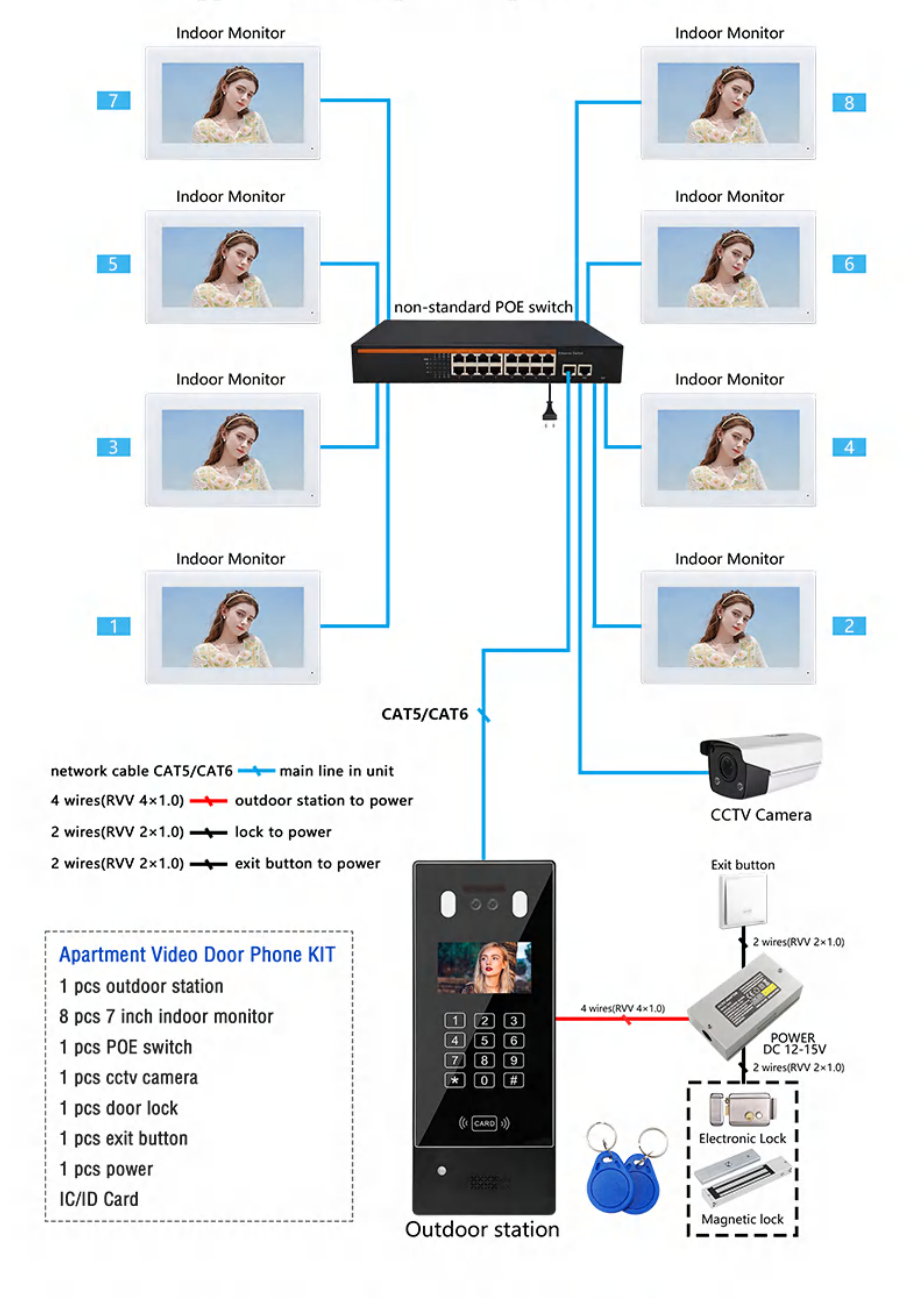
Indoor Monitor
7
Indoor Monitor
8
Indoor Monitor
5
Indoor Monitor
6
non-standard POE switch
Indoor Monitor
3
Indoor Monitor
4
Indoor Monitor
1
Indoor Monitor
2
CAT5/CAT6
CCTV Camera
Exit button
2 wires(RVV 2×1.0)
4 wires(RVV 4×1.0)
POWER DC 12-15V
2 wires(RVV 2×1.0)
Electronic Lock
Magnetic lock
Outdoor station

network cable CAT5/CAT6 — main line in unit
4 wires(RVV 4×1.0) — outdoor station to power
2 wires(RVV 2×1.0) — lock to power
2 wires(RVV 2×1.0) — exit button to power

Apartment Video Door Phone KIT
- 1 pcs outdoor station
- 8 pcs 7 inch indoor monitor
- 1 pcs POE switch
- 1 pcs cctv camera
- 1 pcs door lock
- 1 pcs exit button
- 1 pcs power
- IC/ID Card

IP Apartment Video Intercom Local LAN Networking System Digram

Support connect up 1-9999 pcs indoor monitor

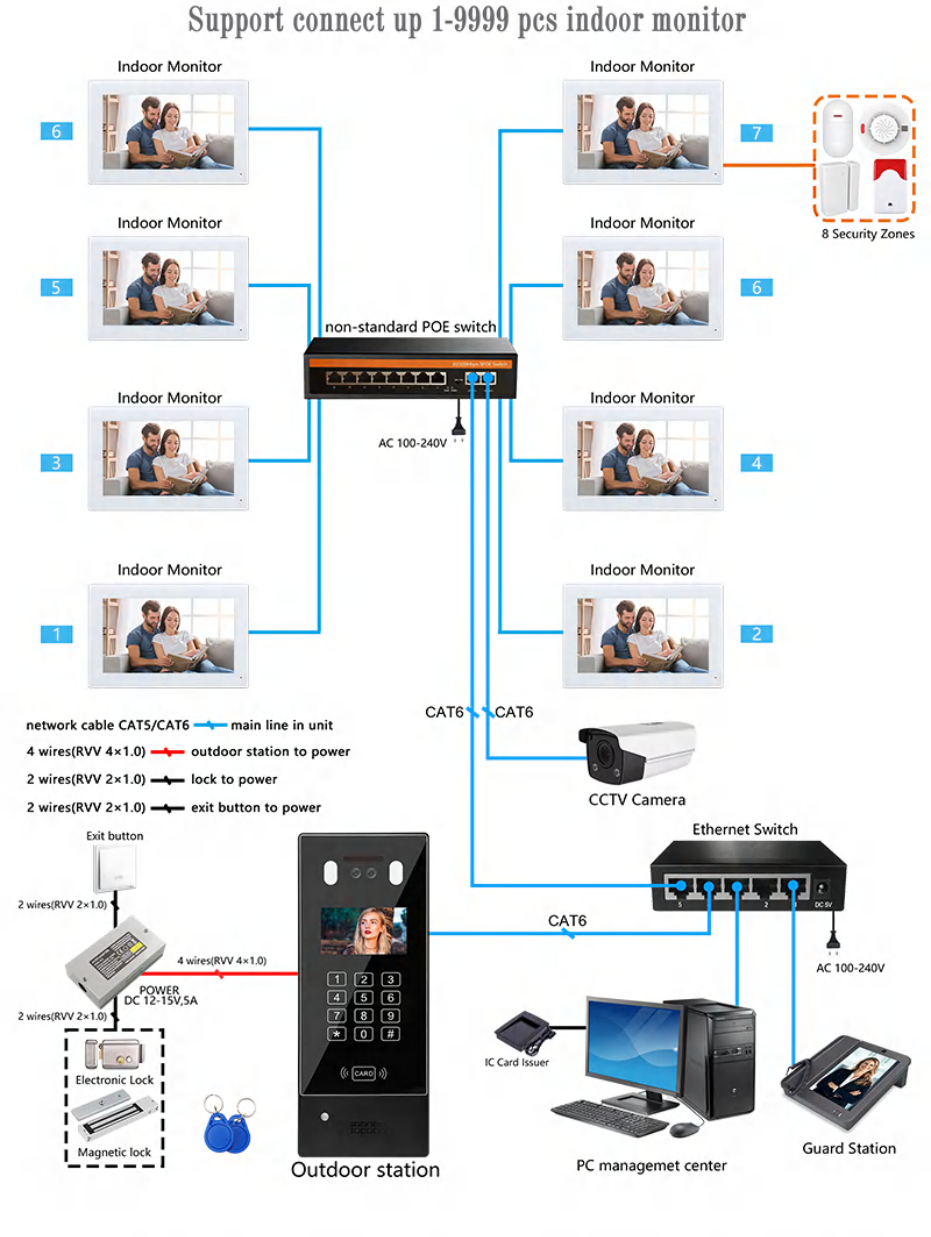
Indoor Monitor
8
Indoor Monitor
7
8 Security Zones
Indoor Monitor
5
Indoor Monitor
6
non-standard POE switch
AC 100-240V
Indoor Monitor
3
Indoor Monitor
4
Indoor Monitor
1
Indoor Monitor
2
CAT6
CAT6
CCTV Camera
Ethernet Switch
CAT6
AC 100-240V
Exit button
2 wires(RVV 2×1.0)
4 wires(RVV 4×1.0)
POWER DC 12-15V,5A
2 wires(RVV 2×1.0)
Electronic Lock
Magnetic lock
Outdoor station
IC Card Issuer
PC managemet center
Guard Station

network cable CAT5/CAT6 — main line in unit
4 wires(RVV 4×1.0) — outdoor station to power
2 wires(RVV 2×1.0) — lock to power
2 wires(RVV 2×1.0) — exit button to power

Specifications And Parameters

INDOOR MONITOR

Model	IP-M72T
Display Screen	7 inch TFT LCD
Resolution	1024*600 pixels
System	Linux system
Network Transmission Mode	TCP/IP protocol
Connection	Network cable CAT5/CAT6
Color	Black / white / customize
Language	English / Turkish / Spanish / French /Customize
Material	ABS Plastic + PET
Charge	Non-standard POE switch / Power adapter (DC12-24V)
Operation Voltage	DC 12-24V
Operation Current	≤500mA
Operation Temperature	-30°C~+60°C
Dimensions	190*122*17mm
Installation	Wall-mounted

OUTDOOR STATION

Model	IP-D21A
Display	4.3 TFT LCD
Camera	1080P , 2 MP , 2 camara
Resolution	480*272 pixels
Material	Aluminum alloy shell + touch button
Network Transmission Mode	TCP/IP protocol
Connection	CAT5/ CAT6
Ethernet Interface	RJ45
Charge	Non-standard POE switch / Power
IC Card Capacity	No limited
Face ID Capacity	≤20000
Operation Voltage	DC12-15V
Operation Temperature	-40°C~ +70°C
Outline Dimensions	360*140*50mm
Installation Dimensions	350*130*50mm
Installation	Wall-mounted or Embedded