IP WIFI TUYA Apartment Video Intercom With Face Recognition

- WiFi Tuya/ Smart Life
- Touch Screen
- Monitoring
- 150° Wide Angle
- Snapshot
- Night Vision
- 1080P HD Camera 2MP
- Security Alarm
- Multi Lauguage
- Call Monitor
- Dual-way Call/Talk
- Unlock Door
- IP Waterproof
- Face Recognition

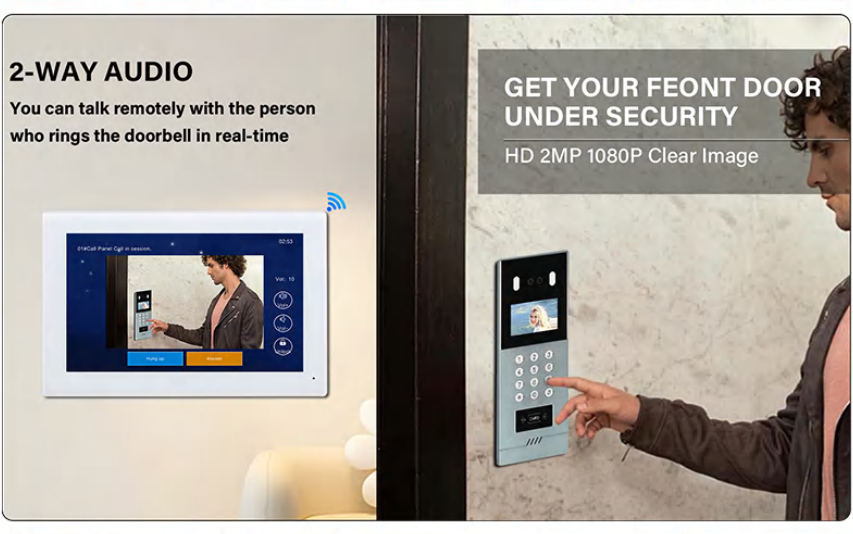

2-WAY AUDIO

You can talk remotely with the person who rings the doorbell in real-time

GET YOUR FEONT DOOR UNDER SECURITY

HD 2MP 1080P Clear Image

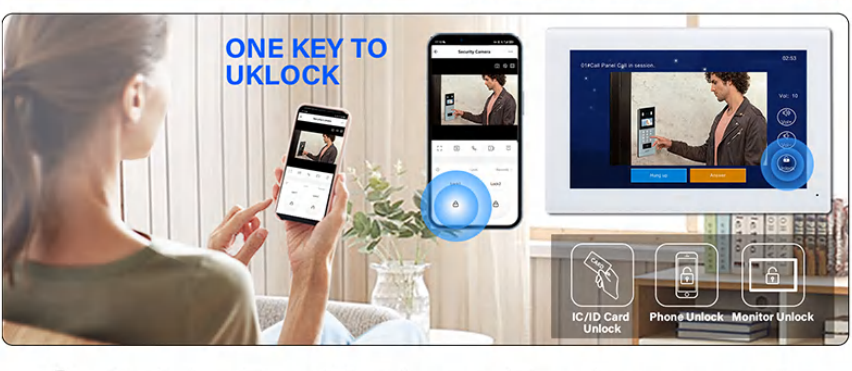
ONE KEY TO UKLOCK
IC/ID Card Unlock
Phone Unlock
Monitor Unlock

Suitable For Various Environments

Apartment
Building
Office
Hotel

Four specifications are available

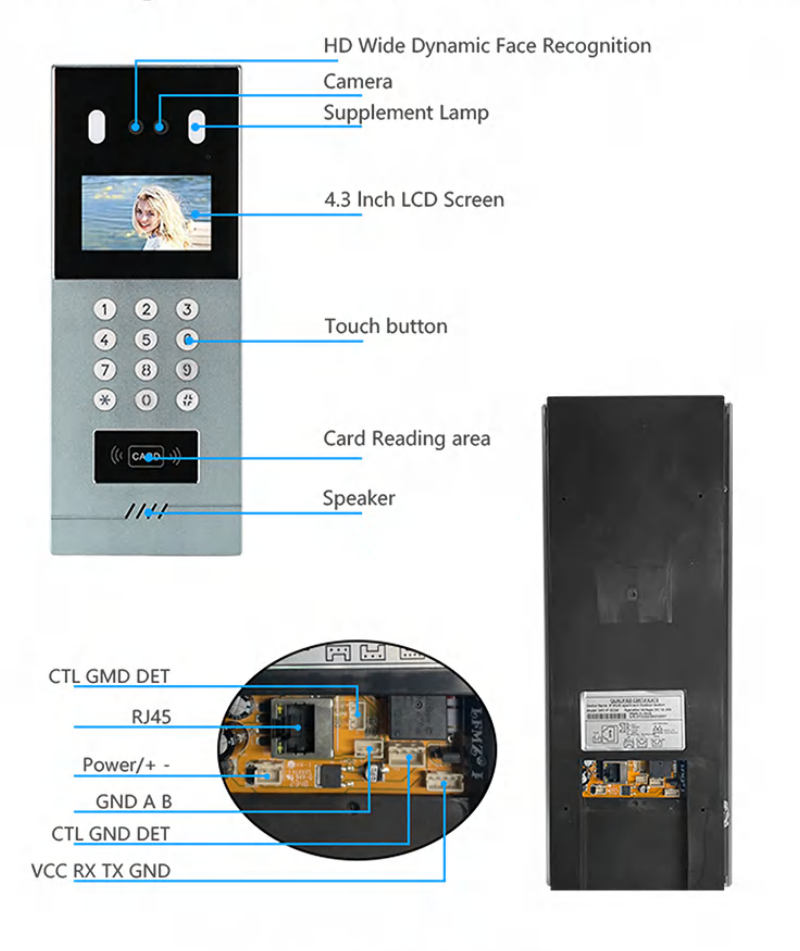
HD Wide Dynamic Face Recognition
Camera
Supplement Lamp
4.3 Inch LCD Screen
Touch button
Card Reading area
Speaker
CTL GMD DET
RJ45
Power/+ -
GND A B
CTL GND DET
VCC RX TX GND

Product Size

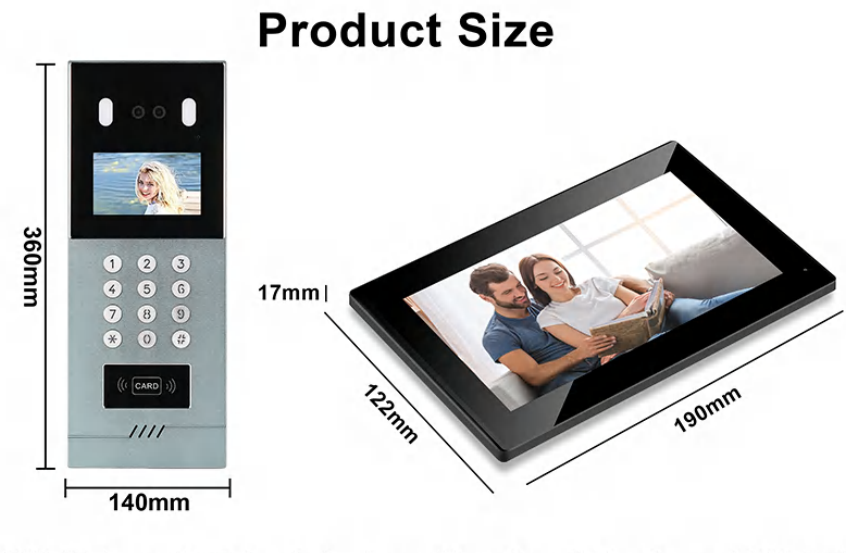
360mm
140mm
17mm
122mm
190mm

WIFI Tuya IP 7 Inch Indoor Monitor (Black and White)

- Multi Language
- Touch Screen
- Snapshot
- Dual-way Call/Talk
- Monitoring
- Security Alarm

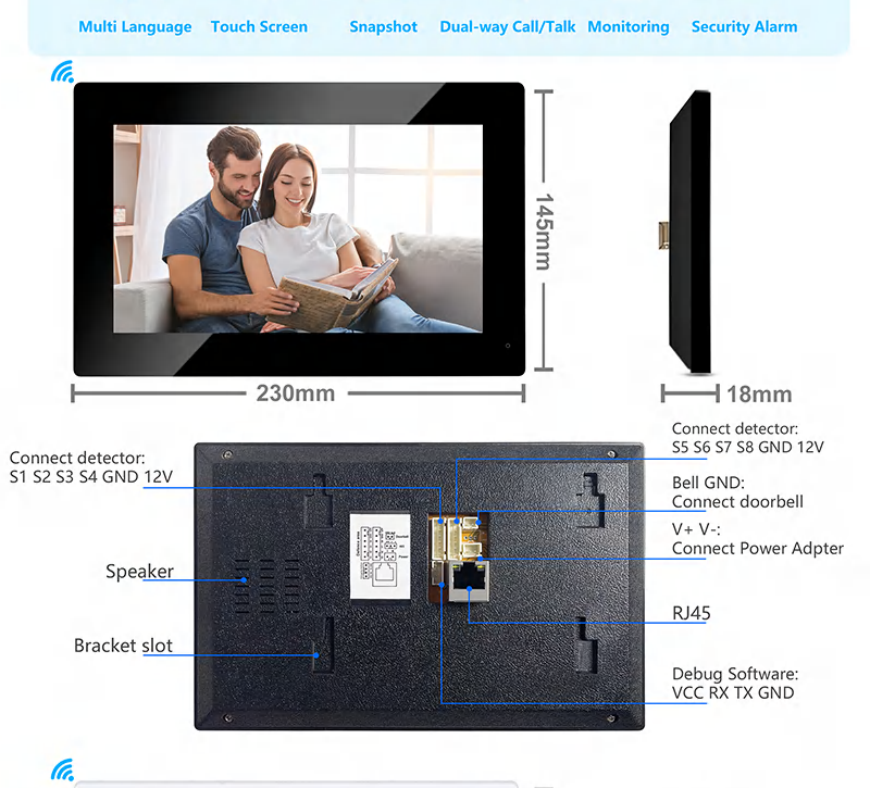
145mm
230mm
18mm
Connect detector: S1 S2 S3 S4 GND 12V
Speaker
Bracket slot
Connect detector: S5 S6 S7 S8 GND 12V
Bell GND: Connect doorbell
V+ V-: Connect Power Adpter
RJ45
Debug Software: VCC RX TX GND

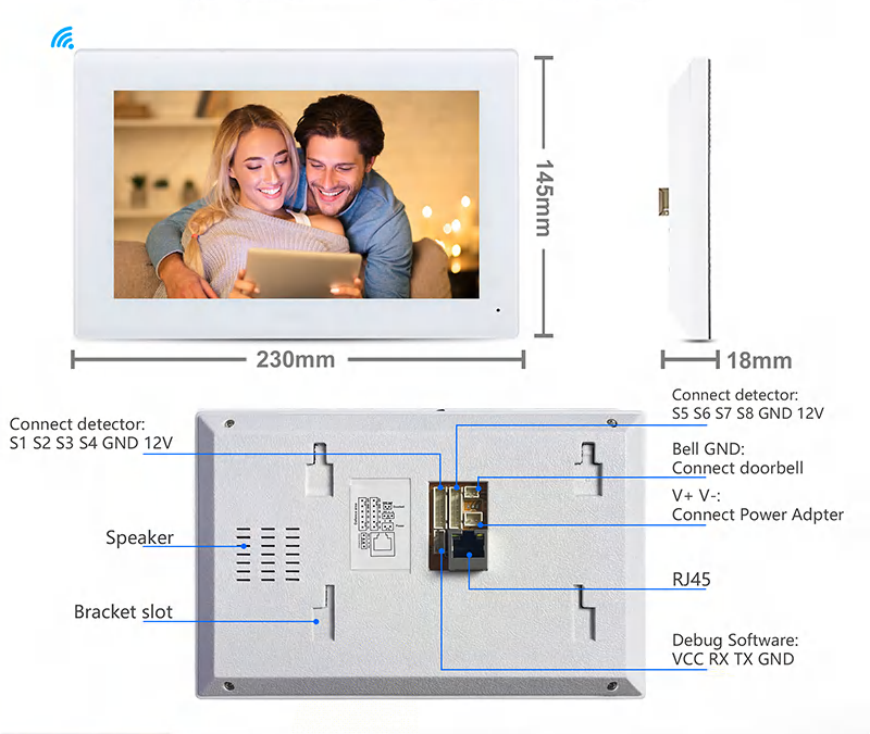
145mm
230mm
18mm
Connect detector: S1 S2 S3 S4 GND 12V
Speaker
Bracket slot
Connect detector: S5 S6 S7 S8 GND 12V
Bell GND: Connect doorbell
V+ V-: Connect Power Adpter
RJ45
Debug Software: VCC RX TX GND

Dual Way Intercom / Unlock

Wall Mounted
The door is open,please come in
Hello! Package Delivery

Room to Room Call

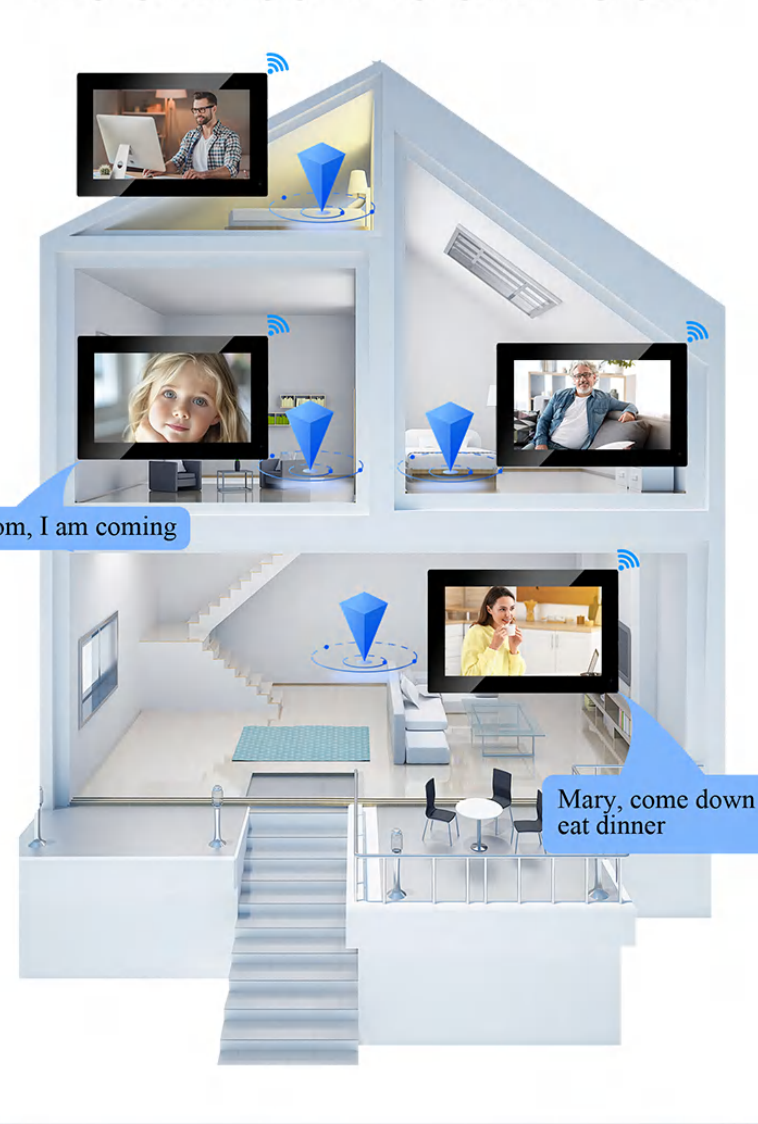
Mom, I am coming
Mary, come down to eat dinner

Flat to Flat Call

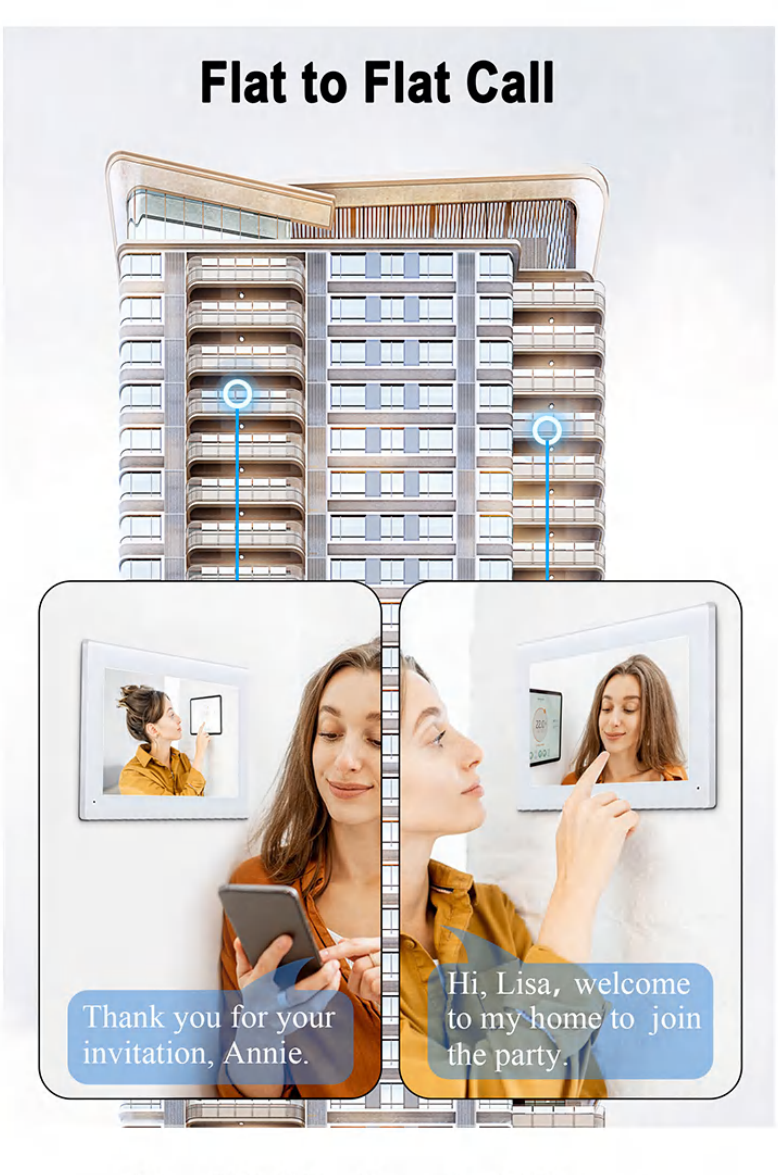
Thank you for your invitation, Annie.
Hi, Lisa, welcome to my home to join the party.

Multi Unlock Ways

Swipe Card Unlock
PC Software Unlock
Administrator Guard Station Unlock
Mobile Phone Unlock
Public Password Unlock
Enter unlock password:
666666
Indoor Monitor Unlock
Private Password Unlock
123456
123456
Face Recognition unlock

Mobile Phone Tuya/Smart Life App Remote Monitor And Unlock

Hi, Sir. Package delivery.
Please put at my door.

1080P 2MP HD Camera With Night Vision

Day Vision
Night Vision

1080P 2MP HD Camera

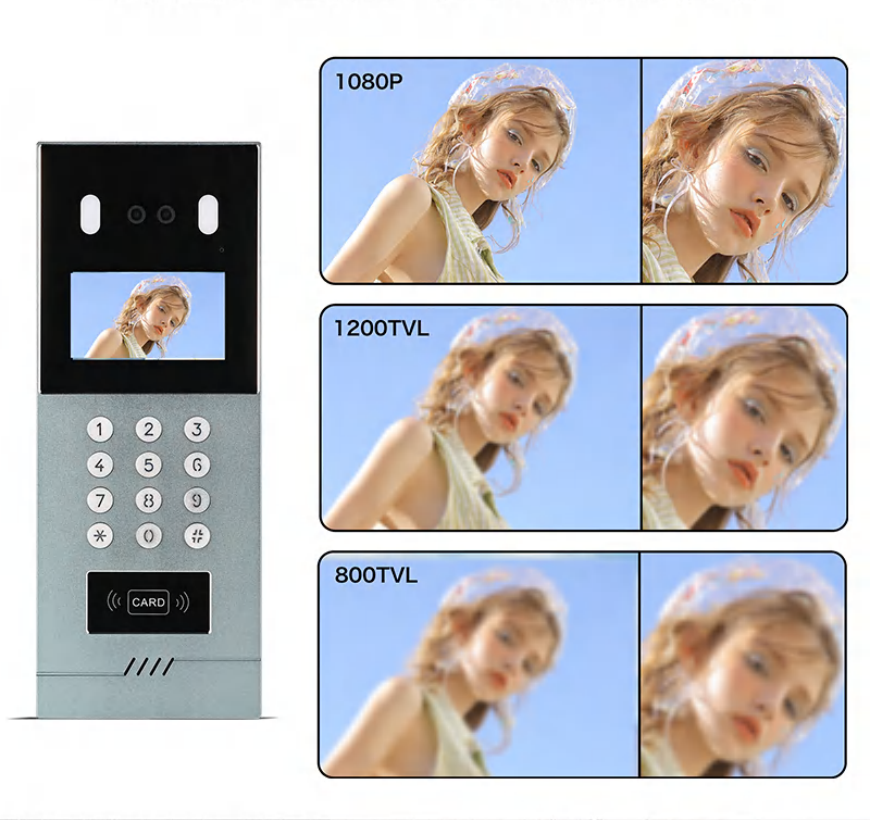
1080P
1200TVL
800TVL

Weather Protection And Durable Use

IP waterproof
Dustproof
Weatherproof
Low & High Temperature: -40°C~+70°C

Low And High Temperature Working

PC Management And Guard Station Manage

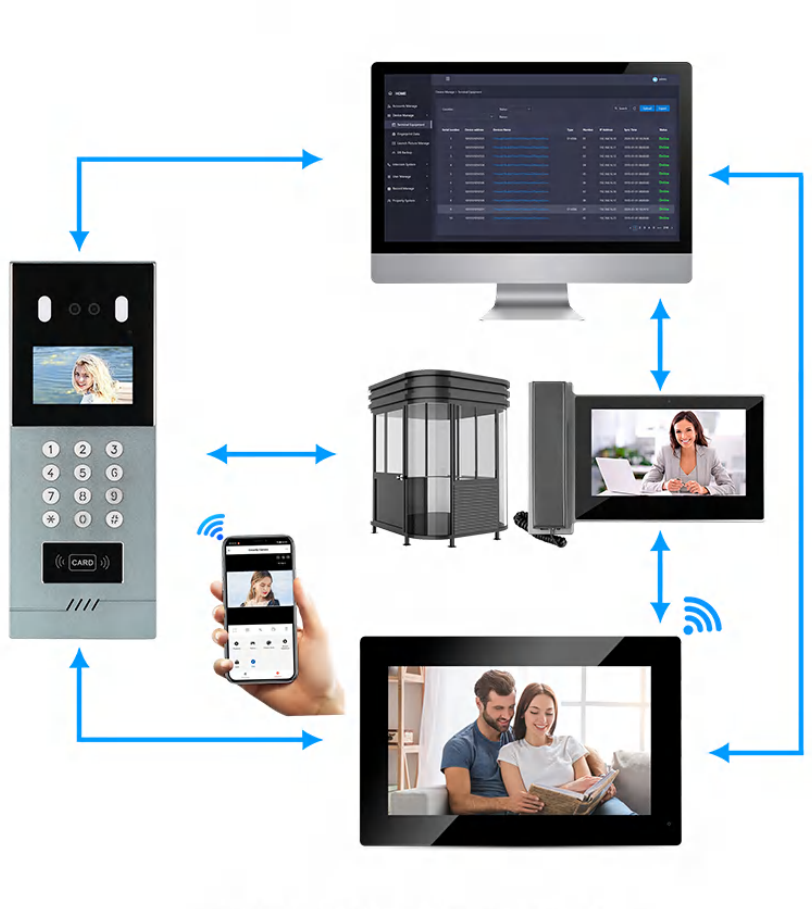

Multi Working Mode

At Home Mode

When visitor input the room number to call, indoor monitor and mobile phone will ring to remind resident to check who is calling and talk with him. Then click the unlock button to open the door.

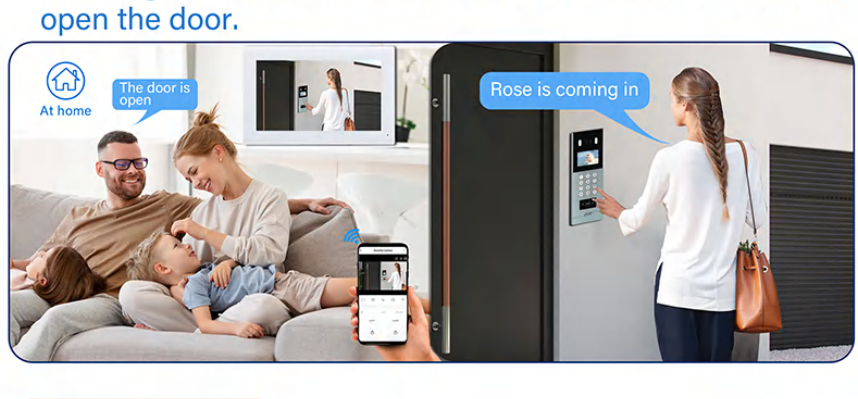
At home
The door is open
Rose is coming in

Sleep Mode

The resident can click mute button if somebody call you at night. It won't bother you if you open mute mode.

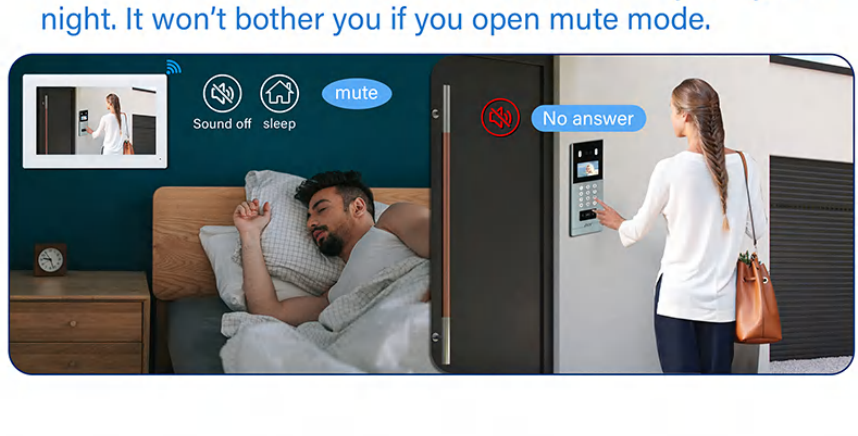
Sound off
sleep
mute
No answer

Monitor Outdoor Station And CCTV Camera Monitor

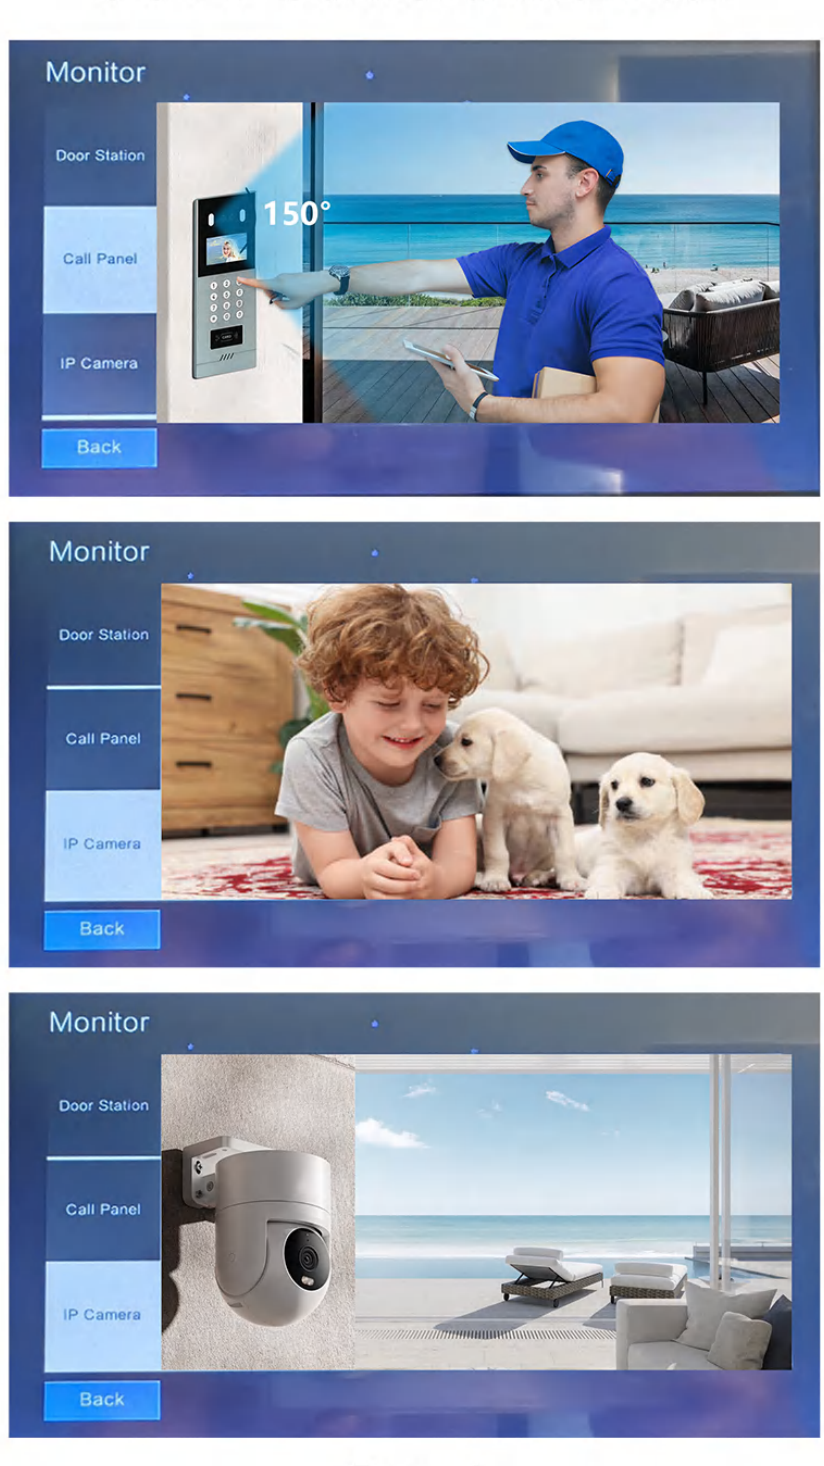
Monitor
Door Station
Call Panel
IP Camera
Back
150°

Record

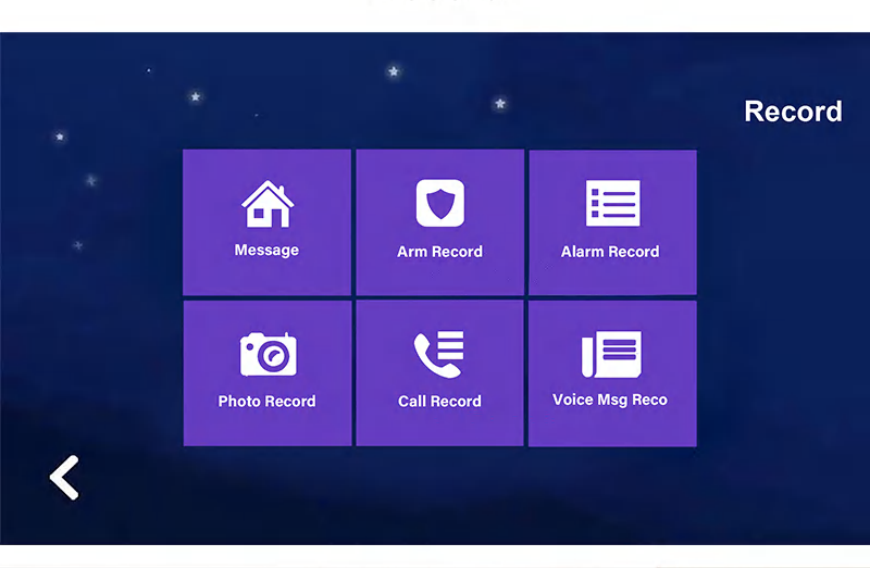
Record
Message
Arm Record
Alarm Record
Photo Record
Call Record
Voice Msg Reco

Security And Alarm 8 Defense Zones

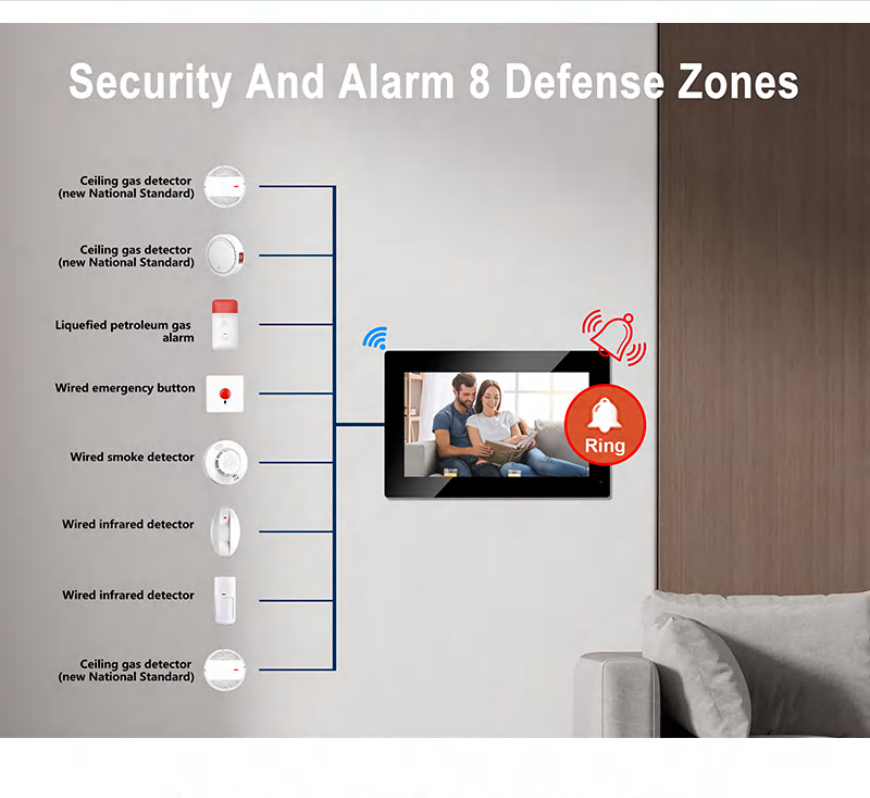
Ceiling gas detector (new National Standard)
Ceiling gas detector (new National Standard)
Liquefied petroleum gas alarm
Wired emergency button
Wired smoke detector
Wired infrared detector
Wired infrared detector
Ceiling gas detector (new National Standard)
Ring

Accessories For Mounting

User Manual

Outdoor Station Installation

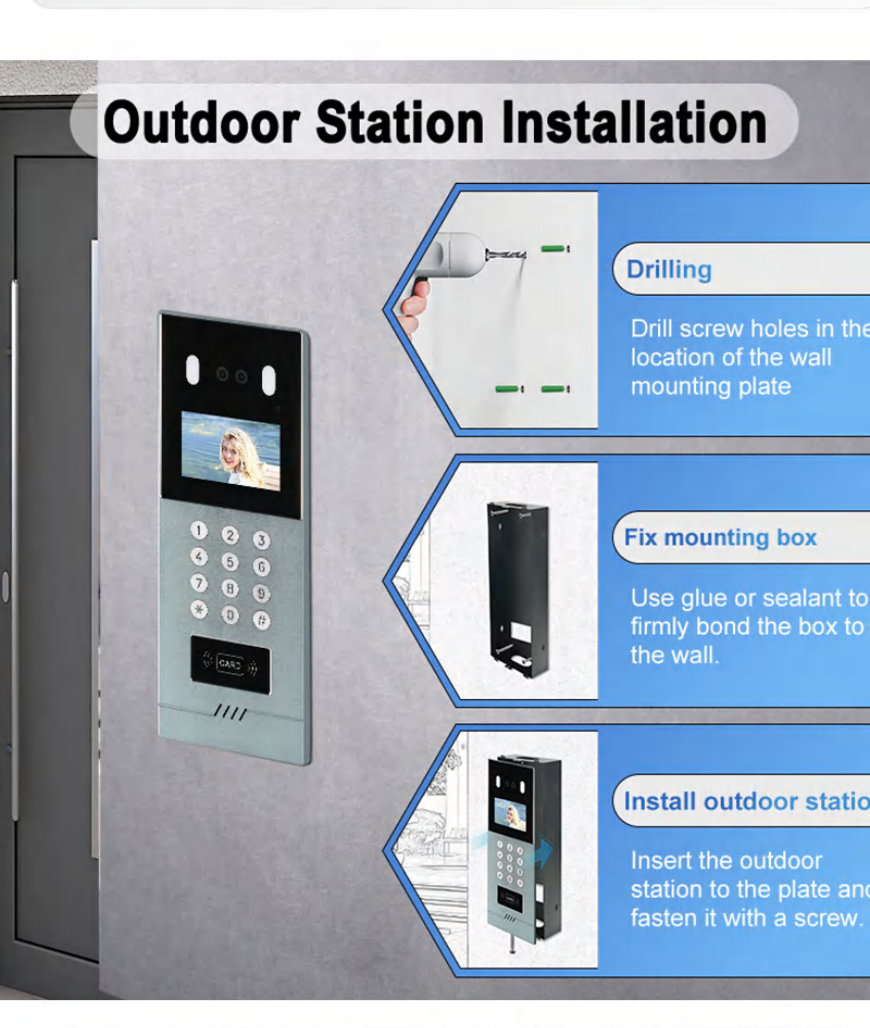
Drilling
Drill screw holes in the location of the wall mounting plate
Fix mounting box
Use glue or sealant to firmly bond the box to the wall.
Install outdoor statio
Insert the outdoor station to the plate and fasten it with a screw.

Indoor Monitor Installation

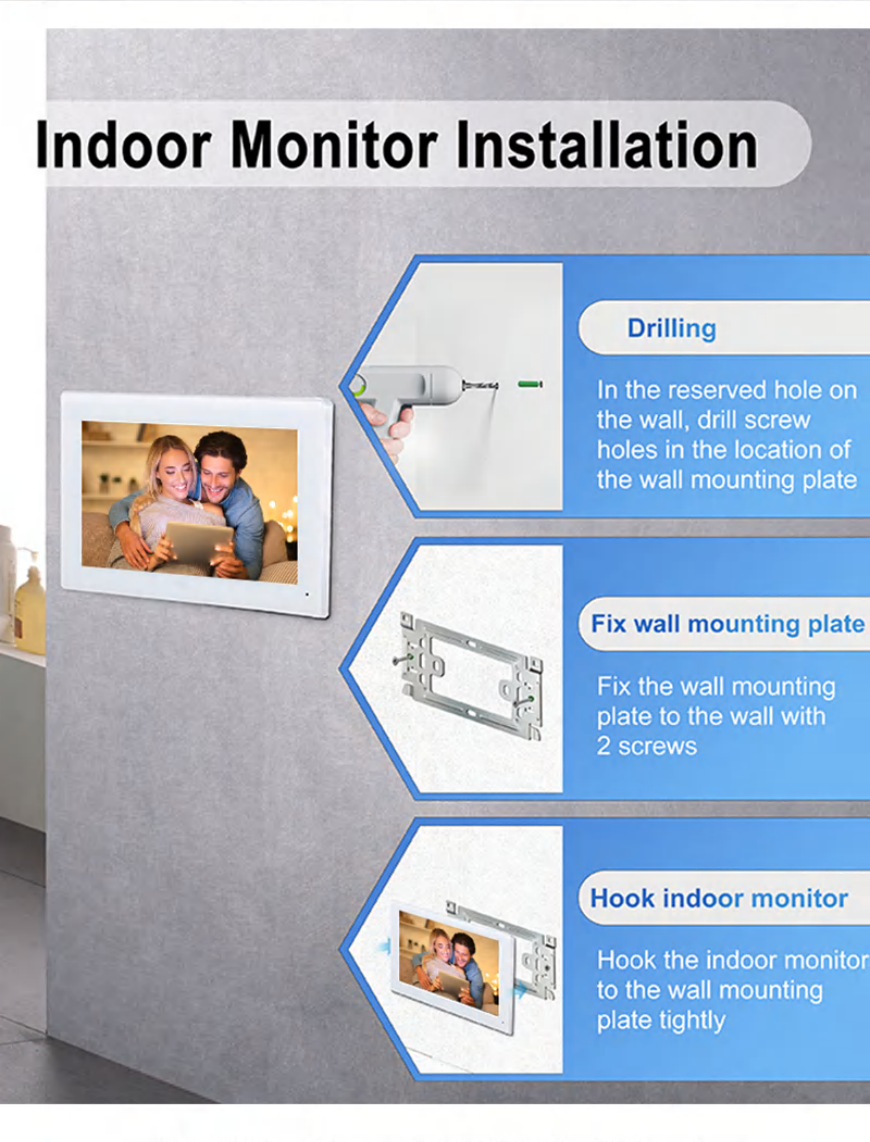
Drilling
In the reserved hole on the wall, drill screw holes in the location of the wall mounting plate
Fix wall mounting plate
Fix the wall mounting plate to the wall with 2 screws
Hook indoor monitor
Hook the indoor monitor to the wall mounting plate tightly

Certification CE/FCC/RoHS, etc

UI And Language Can Be Customized

- UI Interface
- Multi Language

Customize Your Logo For Free If Over 200 Pcs

Your Logo
Your Logo

IP System-Apartment 1 to 1 Diagram

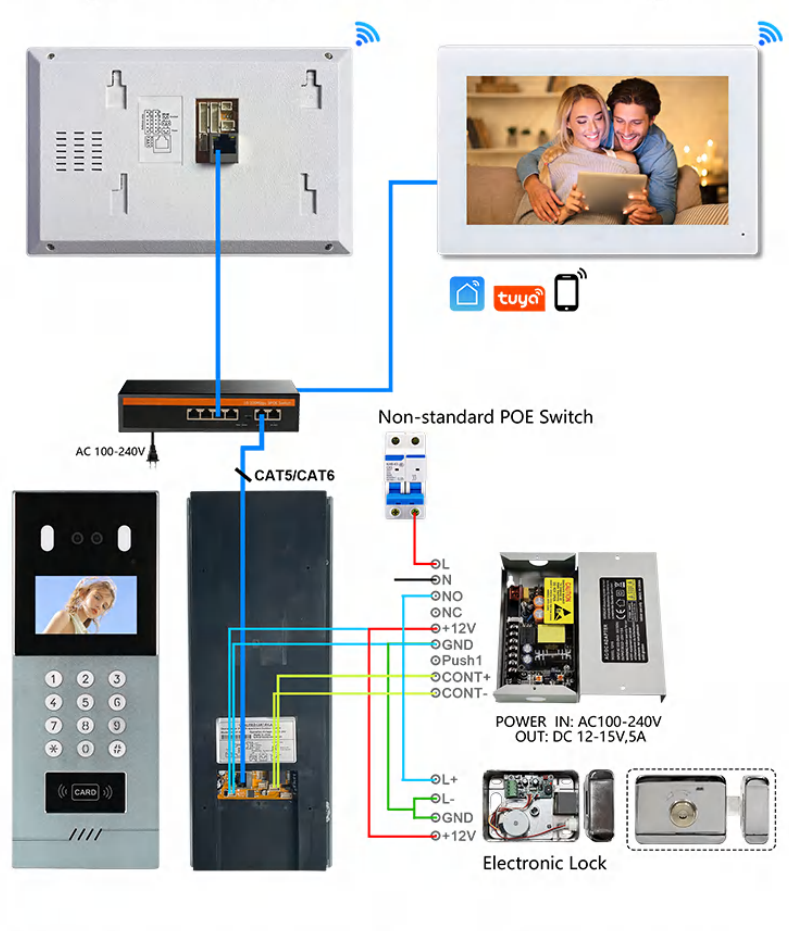
Non-standard POE Switch
AC 100-240V
CAT5/CAT6
L
N
NO
NC
+12V
GND
Push1
CONT+
CONT-
POWER IN: AC100-240V OUT: DC 12-15V,5A
L+
L-
GND
+12V
Electronic Lock

IP Apartment Video Intercom Normal System Diagram

Support connect up 1-9999 pcs indoor monitor

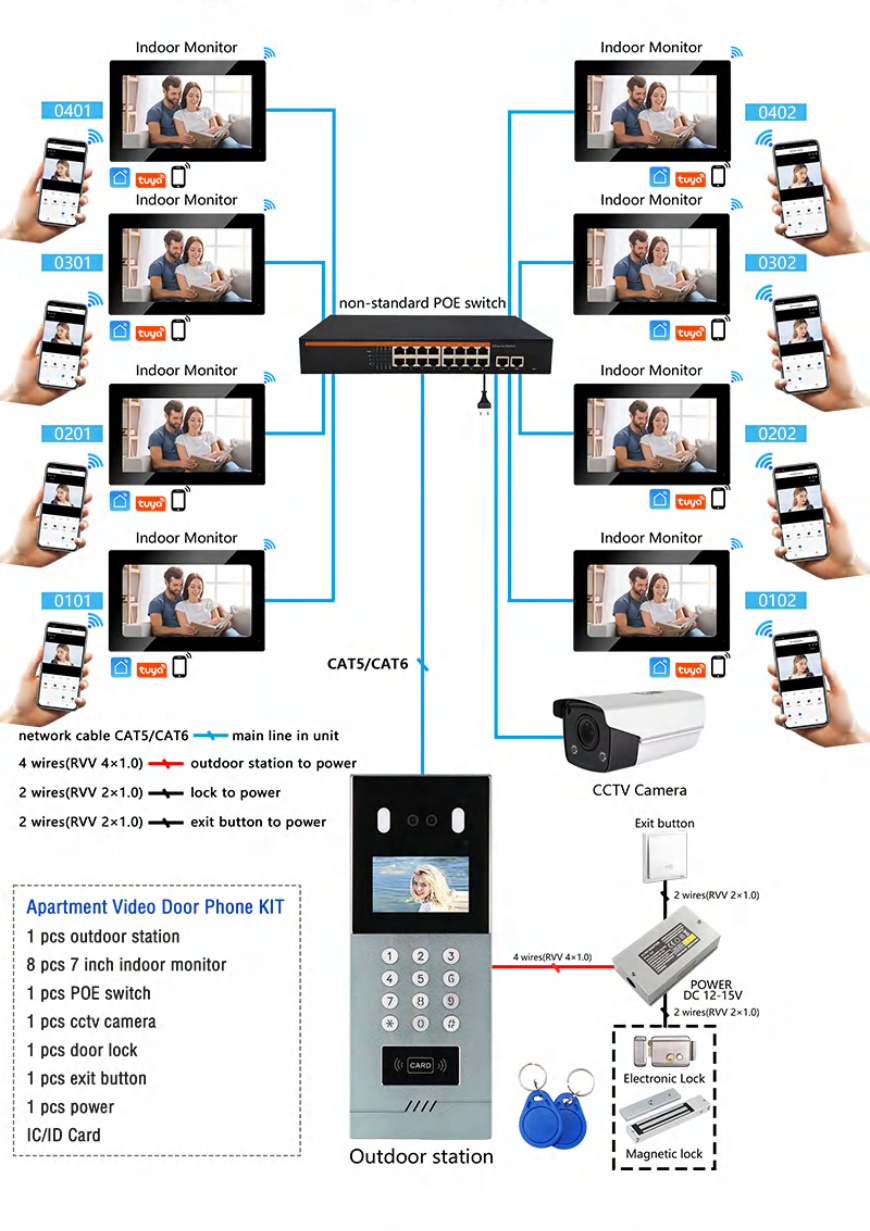
Indoor Monitor
0401
0402
0301
0302
0201
0202
0101
0102
non-standard POE switch
CAT5/CAT6
network cable CAT5/CAT6 main line in unit
4 wires(RVV 4×1.0) outdoor station to power
2 wires(RVV 2×1.0) lock to power
2 wires(RVV 2×1.0) exit button to power
CCTV Camera
Exit button
POWER DC 12-15V
Electronic Lock
Magnetic lock
Outdoor station

Apartment Video Door Phone KIT
- 1 pcs outdoor station
- 8 pcs 7 inch indoor monitor
- 1 pcs POE switch
- 1 pcs cctv camera
- 1 pcs door lock
- 1 pcs exit button
- 1 pcs power
- IC/ID Card

IP Apartment Video Intercom Local LAN Networking System Digram

Support connect up 1-9999 pcs indoor monitor

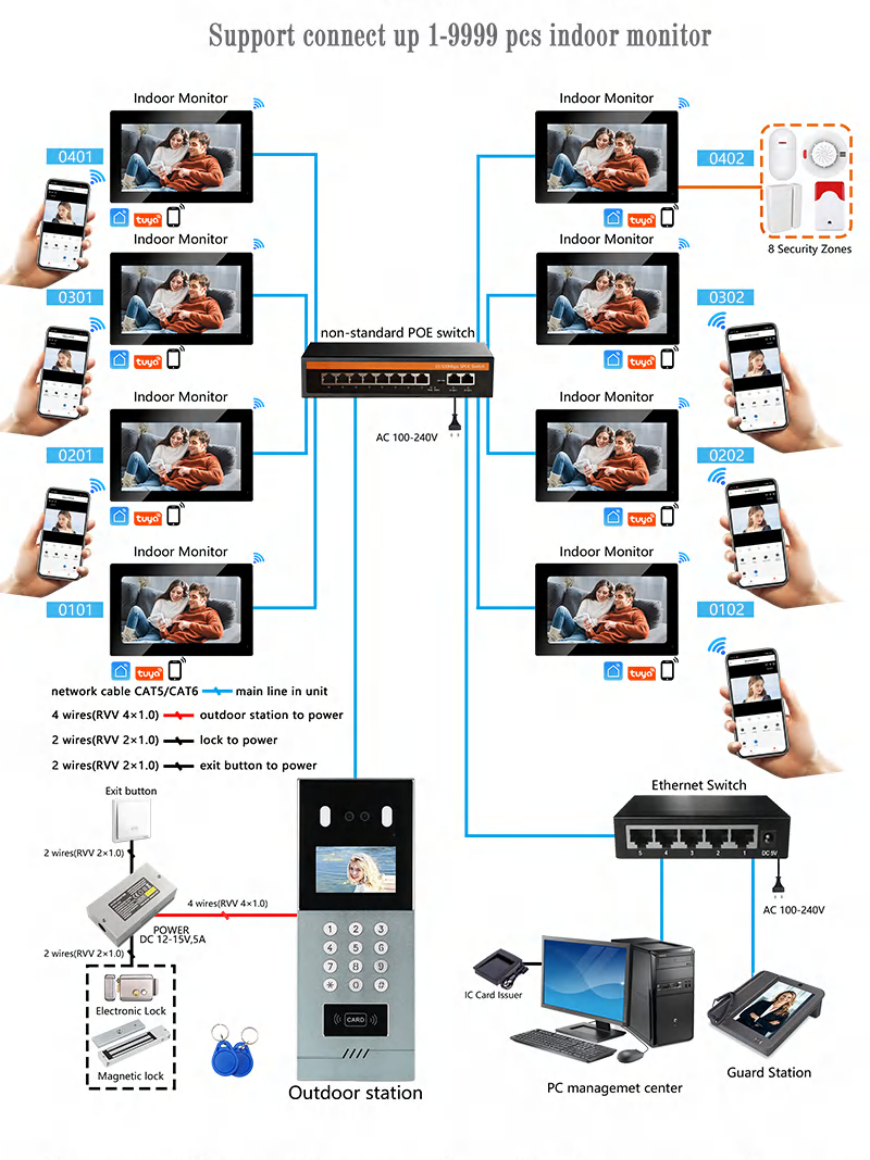
Indoor Monitor
0401
0402
8 Security Zones
0301
0302
non-standard POE switch
AC 100-240V
0201
0202
0101
0102
network cable CAT5/CAT6 main line in unit
4 wires(RVV 4×1.0) outdoor station to power
2 wires(RVV 2×1.0) lock to power
2 wires(RVV 2×1.0) exit button to power
Exit button
4 wires(RVV 4×1.0)
POWER DC 12-15V,5A
Electronic Lock
Magnetic lock
Outdoor station
Ethernet Switch
AC 100-240V
IC Card Issuer
PC managemet center
Guard Station

Specifications And Parameters

INDOOR MONITOR

Model	IP-M72T-TUYA
Display Screen	7 inch TFT LCD
Resolution	1024*600 pixels
System	Linux system
Network Transmission Mode	TCP/IP protocal
Connection	network cable CAT5/CAT6
Color	black / white / customize
Language	Chinese/ English/ Customize
Material	ABS Plastic + PET
App	Tuya, Smart Life
Charge	non-standard POE switch / Power adapter (DC12-24V)
Ethernet interface	RJ45
Operation Voltage	DC 12-24V
Operation Current	≤500mA
Operation Temperature	-30°C~+60°C
Dimensions	190*122*17mm
Installation	Wall mounted

OUTDOOR STATION

Model	SKY-IP-D21A
Resolution	1080P , 2 MP , 2 camara
Display	4.3 TFT LCD
Resolution	480*272
Color	gold and silvery
Material	Aluminum alloy shell + Metal physical press button
Network Transmission Mode	TCP/IP protocal
Connection	CAT5/ CAT 6
Charge	non-standard POE switch / Power
Ethernet interface	RJ45
IC Card Capacity	≥20000
Operation Current	≤1A
Operation Voltage	DC 12-15V
Operation Temperature	-40°C~ +70°C
Outline Dimensions	360*140*50mm
Installation Dimensions	350*130*50mm
Installation	Wall-mounted or Embedded