

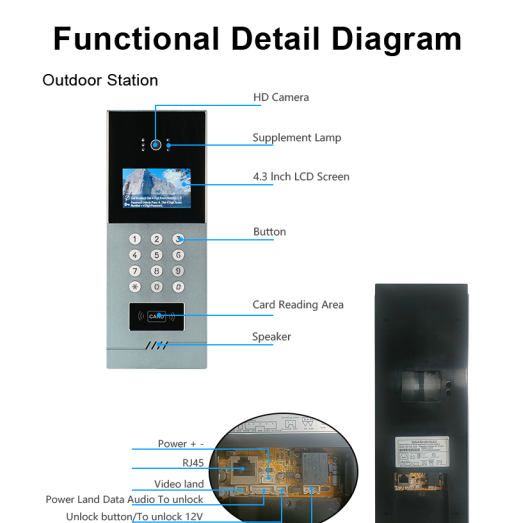




## Analog System Video Intercom Apartment

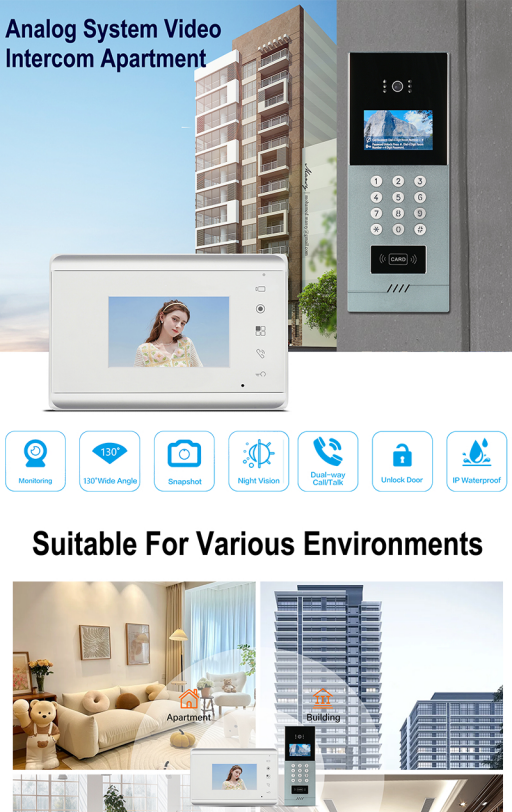


Unlock button 10 to unlock 12V  
Lock Wet contact

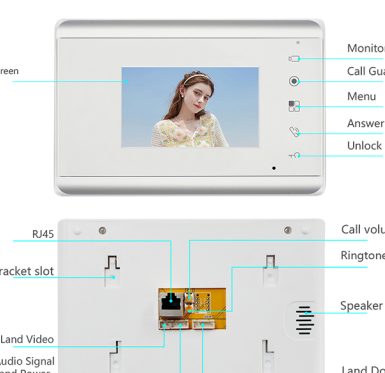

## And High Temperature Work

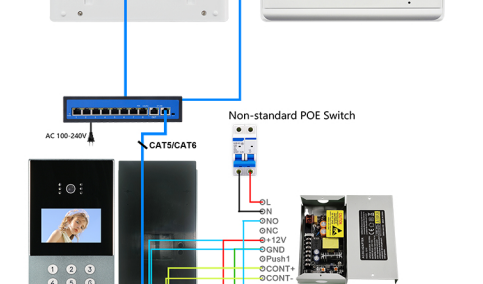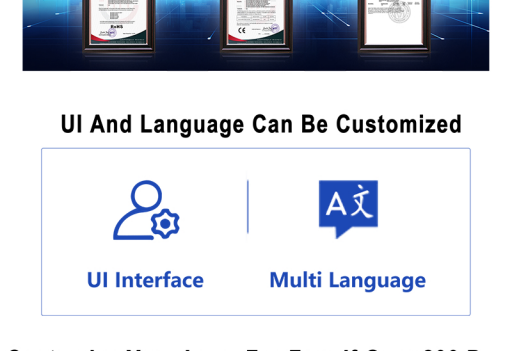


Up to 10000 pcs indoor monitor

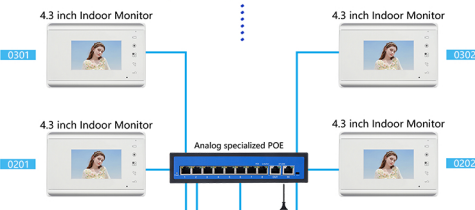


A network diagram showing a central black switch. A blue line labeled 'CAT6' connects the switch to a monitor on the left. Another blue line connects the switch to a monitor on the right. A third blue line connects the switch to a camera at the bottom left. A fourth blue line connects the switch to an 'Exit button' at the bottom right.



| Model      | SKT-LNA-M10                                            | Model      | SKT-LNA-D22                 |
|------------|--------------------------------------------------------|------------|-----------------------------|
| Display    | 4.3-inch TFT true color digital high-definition screen | Display    | 4.3" true color LCD display |
| Material   | ABS plastic                                            | Definition | 700TVL                      |
| Resolution | 480*272 pixels                                         | Resolution | 480*272 Pixels              |

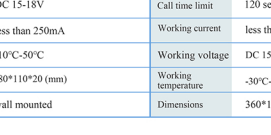

|                     |                 |                     |              |
|---------------------|-----------------|---------------------|--------------|
| Temperature         | -10°C~50°C      | Working voltage     | DC 15V~18V   |
| Dimensions          | 180*110*20 (mm) | Working temperature | -30°C~60°C   |
| Installation method | wall mounted    | Dimensions          | 360*140*50mm |

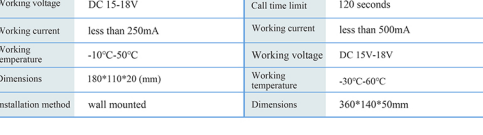

|                     |                 |                     |              |
|---------------------|-----------------|---------------------|--------------|
| Temperature         | -10°C-50°C      | Working voltage     | DC 15V-18V   |
| Dimensions          | 180*110*20 (mm) | Working temperature | -30°C-60°C   |
| Installation method | wall mounted    | Dimensions          | 360*140*50mm |

|                     |                 |                     |                 |
|---------------------|-----------------|---------------------|-----------------|
| Working voltage     | DC 15-18V       | Call time limit     | 120 seconds     |
| Working current     | less than 250mA | Working current     | less than 500mA |
| Working temperature | -10°C-50°C      | Working voltage     | DC 15V-18V      |
| Dimensions          | 180*110*20 (mm) | Working temperature | -30°C-60°C      |
| Installation method | wall mounted    | Dimensions          | 360*140*50mm    |