IP System Apartment Video Door Phone Intercom

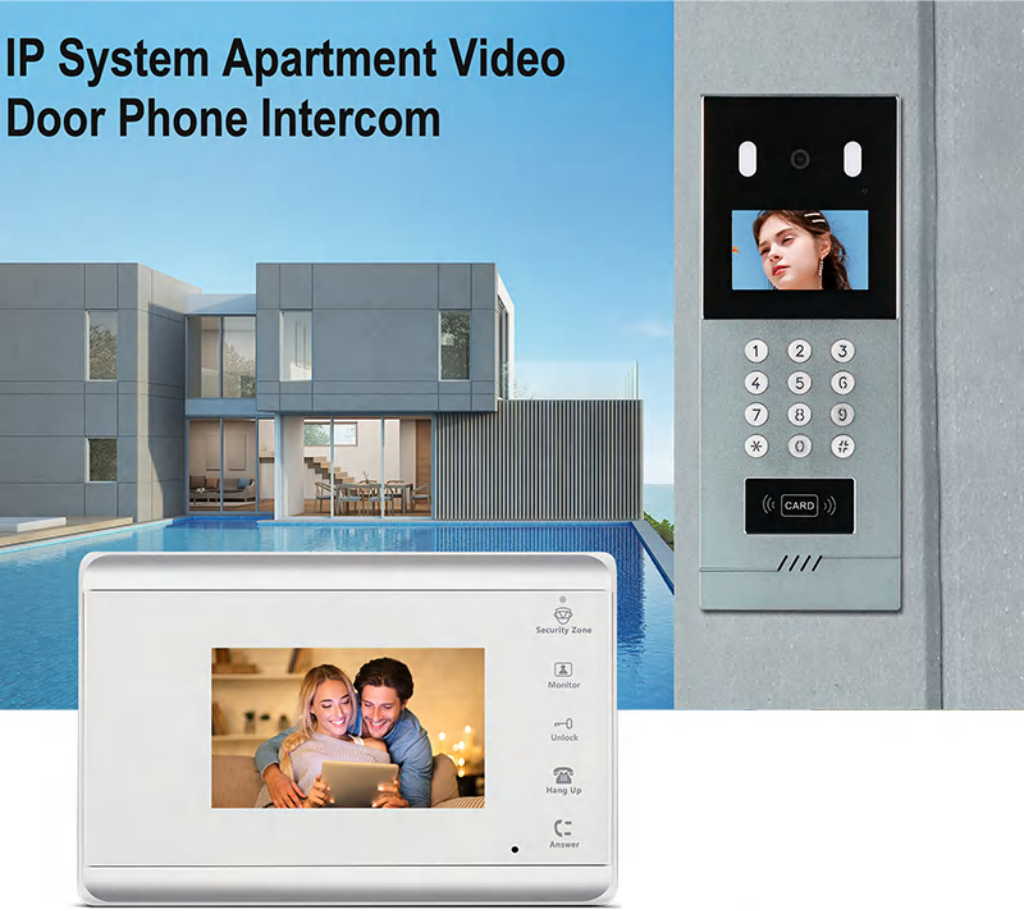
CARD
Security Zone
Monitor
Unlock
Hang Up
Answer

- Touch Screen
- Monitoring
- 130°Wide Angle
- Snapshot
- 1080P HD Camera 2MP
- Multi Lauguage
- Call Monitor
- Dual-way Call/Talk
- Unlock Door
- IP Waterproof

Suitable For Various Environments

Apartment
Building
Office
Hotel

4.3 Inch Outdoor Station Details


Camera
Supplement Lamp
4.3 Inch LCD Screen
Touch button
1
2
3



4 5 6
7 8 9
* 0 #
CARD
Card Reading area
Speaker



NC COM NO
Debug/VCC RX TX GND
RJ45
Power/+ -
485/B A GND
CTL GND DET
NC GND NO



360mm
140mm

IP 4.3 Inch Indoor Monitor

- Multi Language
- Touch Screen
- Snapshot
- Dual-way Call/Talk
- Monitoring
- Security Alarm

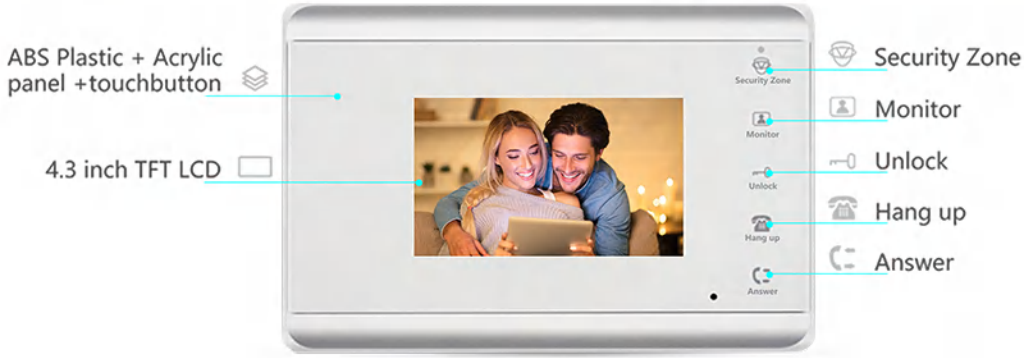

ABS Plastic + Acrylic panel +touchbutton
4.3 inch TFT LCD
Security Zone
Monitor
Unlock
Hang up
Answer

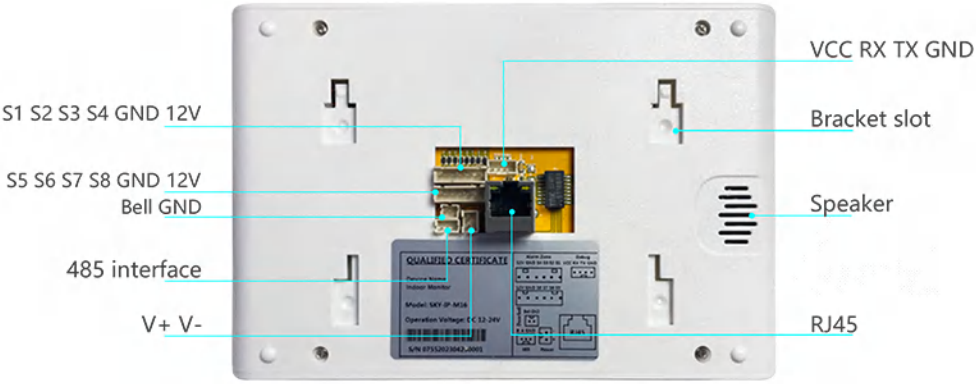
S1 S2 S3 S4 GND 12V
S5 S6 S7 S8 GND 12V
Bell GND
485 interface
V+ V-
VCC RX TX GND
Bracket slot
Speaker
RJ45

Product Size

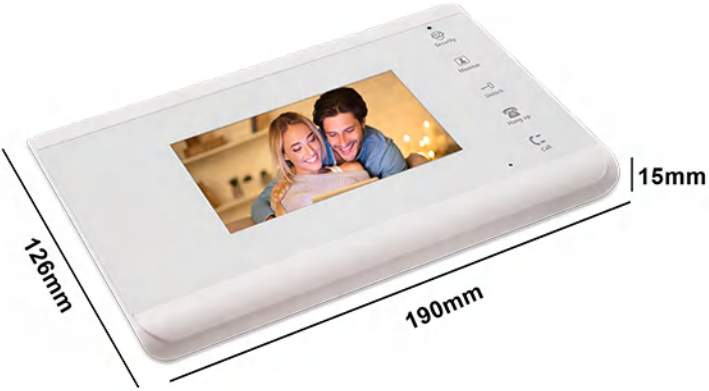
15mm
126mm
190mm

Dual Way Intercom / Unlock

Wall Mounted
The door is open,please come in
Hello! Package Delivery

Room to Room Call

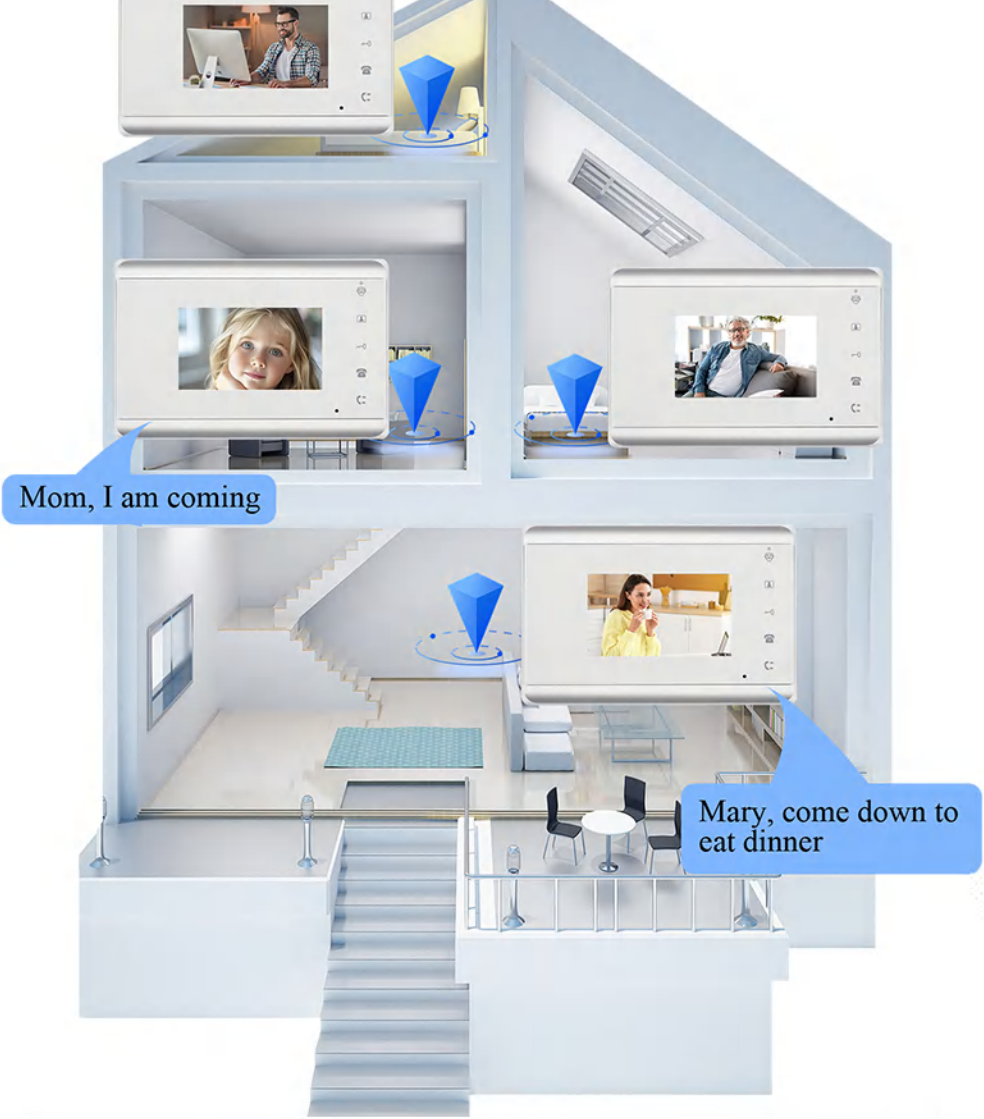
Mom, I am coming
Mary, come down to eat dinner

Flat to Flat Call

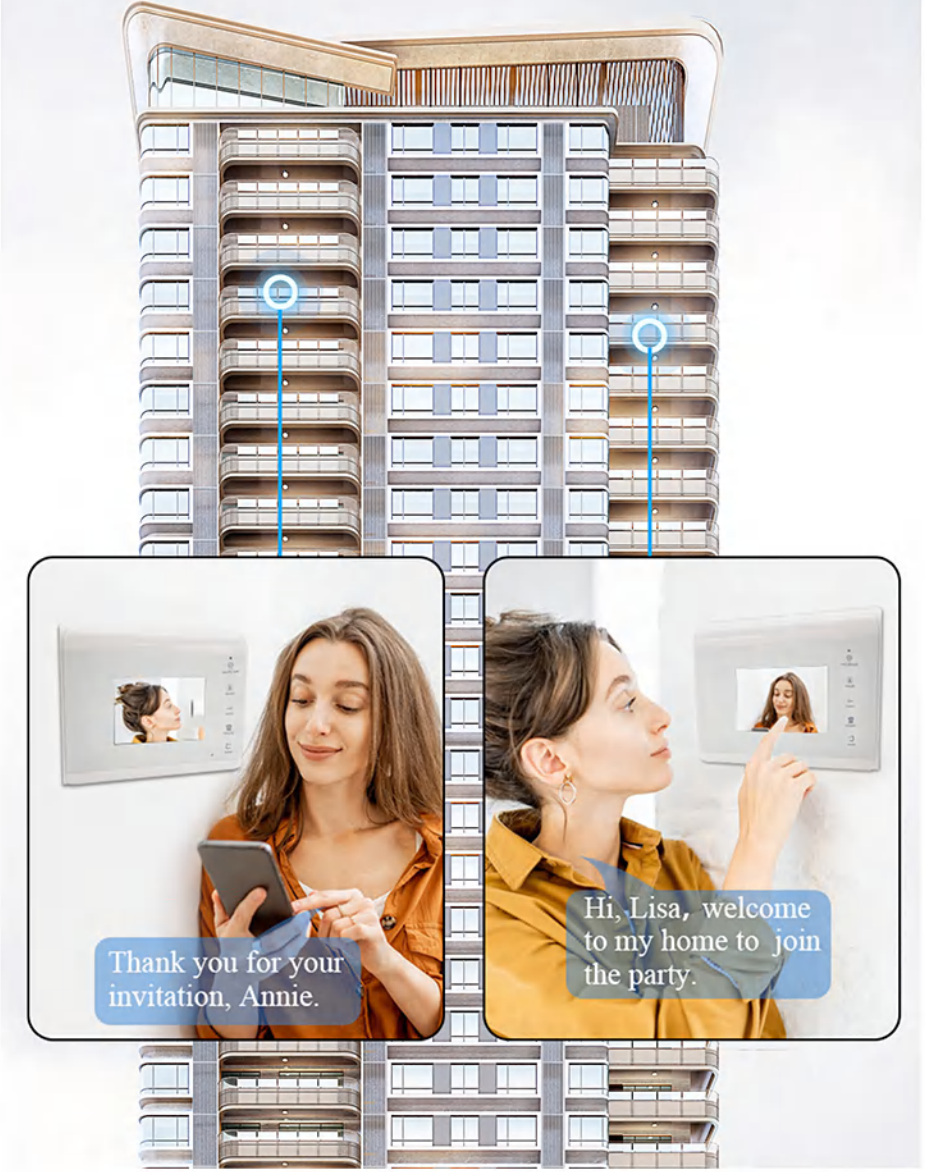
Thank you for your invitation, Annie.
Hi, Lisa, welcome to my home to join the party.

Multi Unlock Ways

Swipe Card Unlock

Administrator Guard
Station Unlock

PC Software Unlock


Public Password Unlock

Enter unlock password:

666666

Enter six-digit password + "#"

Clear or return: Press "*"

Indoor Monitor Unlock


Private Password Unlock

Enter room number:

123456

Enter unlock password:

123456

Please enter room number + "#" first

Then enter six-digit resident password + "#"

Clear or return: Press "*"

1080P 2MP HD Camera With Night Vision

1 2 3
4 5 6
7 8 9
* 0 #
CARD

Day Vision
Night Vision

1080P 2MP HD Camera

1 2 3
4 5 6
7 8 9
* 0 #
CARD

1080P
1200TVL
800TVL

Weather Protection And Durable Use

IP waterproof

Dustproof

Weatherproof

Low & High Temperature:
-40℃~+70℃

1
2
3
4
5
6
7
8
9
*
0
#
CARD

Low And High Temperature Working
-40°C
+70°C
1
2
3
4
5
6
7
8
9
*
0
#
CARD

PC Management And Guard Station Manage

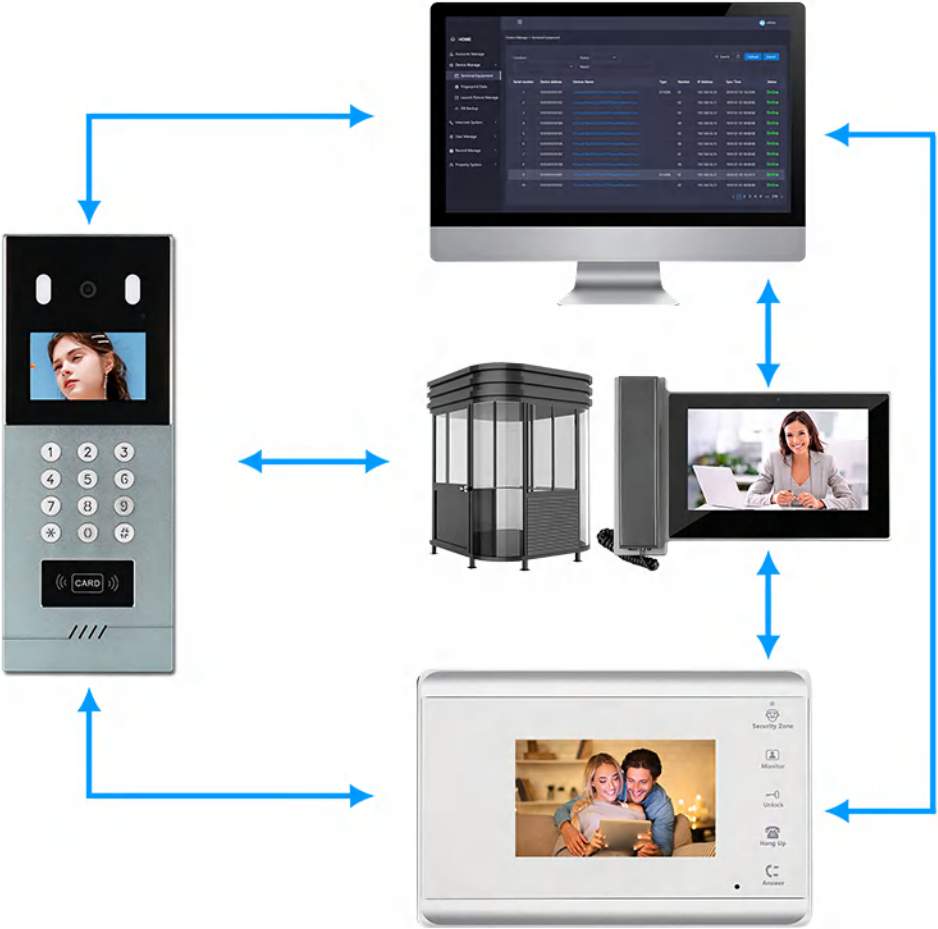
1 2 3
4 5 6
7 8 9
* 0 #
CARD
Security Zone
Monitor
Unlock
Hang Up
Answer

Multi Working Mode

At Home Mode

When visitor input the room number to call, indoor monitor and mobile phone will ring to remind resident to check who is calling and talk with him. Then click the unlock button to open the door.

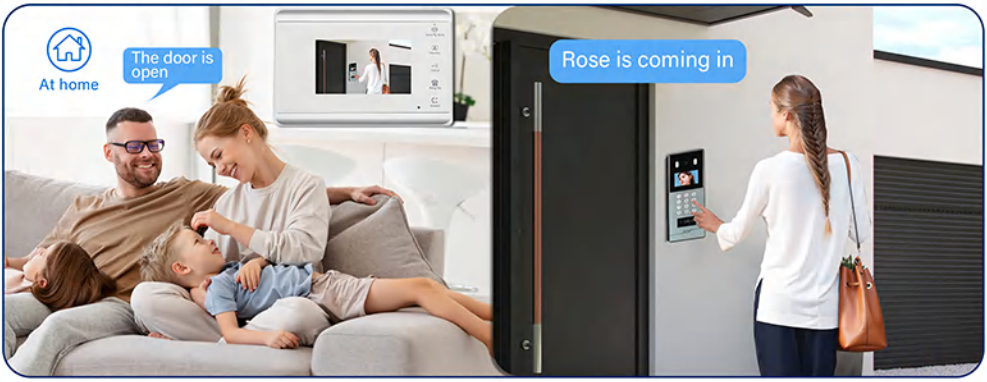
At home
The door is open
Rose is coming in

Sleep Mode

The resident can click mute button if somebody call you at night. It won't bother you if you open mute mode.

Sound off
sleep
mute
No answer

Record

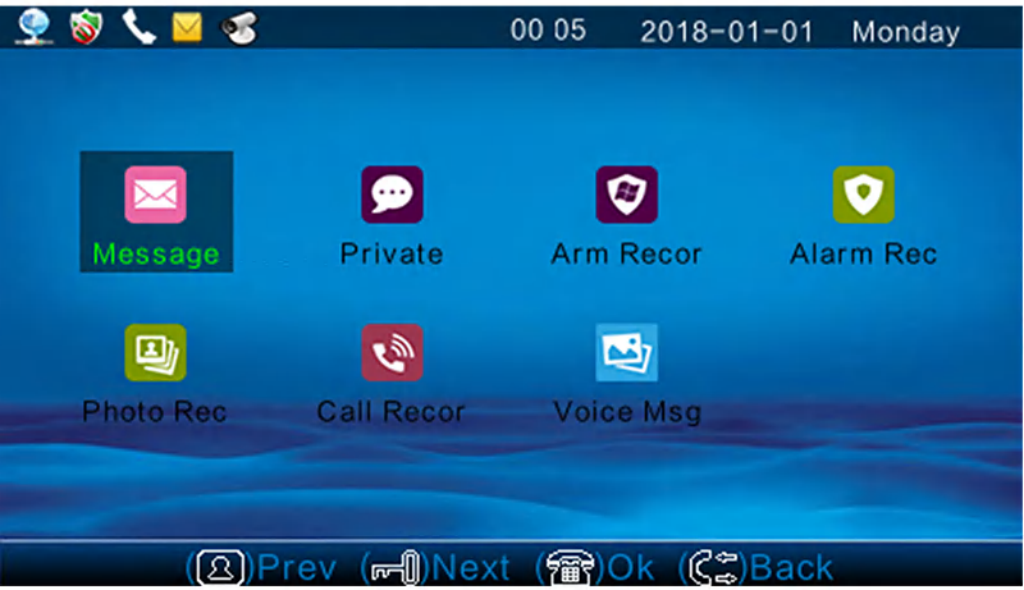
00 05
2018-01-01
Monday
Message
Private
Arm Recor
Alarm Rec
Photo Rec
Call Recor
Voice Msg
Prev
Next
Ok
Back

Security And Alarm 8 Defense Zones

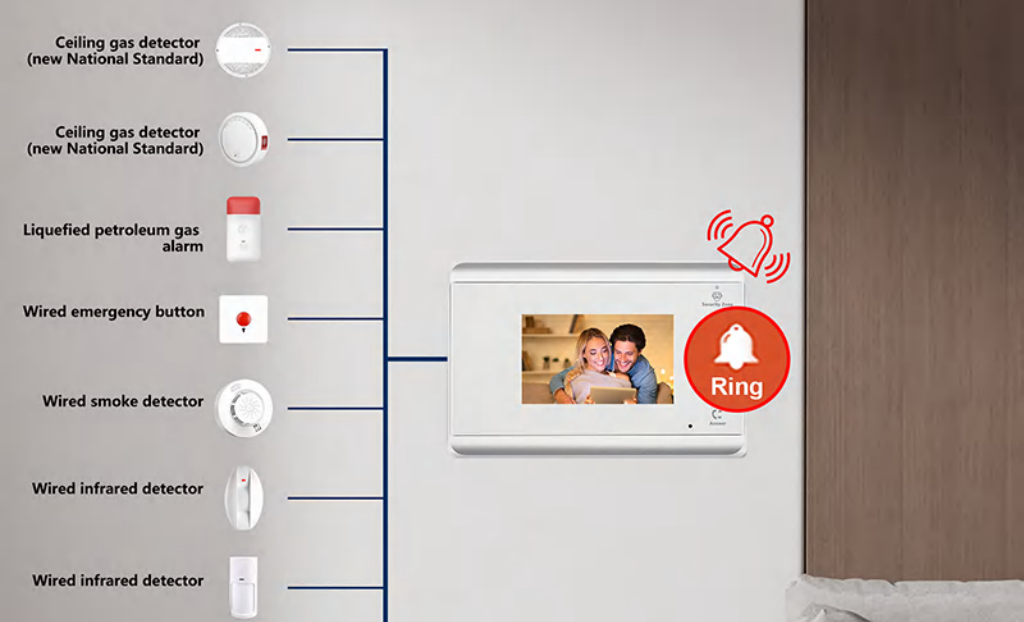
Ceiling gas detector (new National Standard)

Ceiling gas detector (new National Standard)

Liquefied petroleum gas alarm

Wired emergency button

Wired smoke detector

Wired infrared detector

Wired infrared detector


Ceiling gas detector
(new National Standard)

Accessories For Mounting

Security Zone
Monitor
Unlock
Hang Up
Answer
1
2
3
4
5
6
7
8
9
*
0
#
CARD

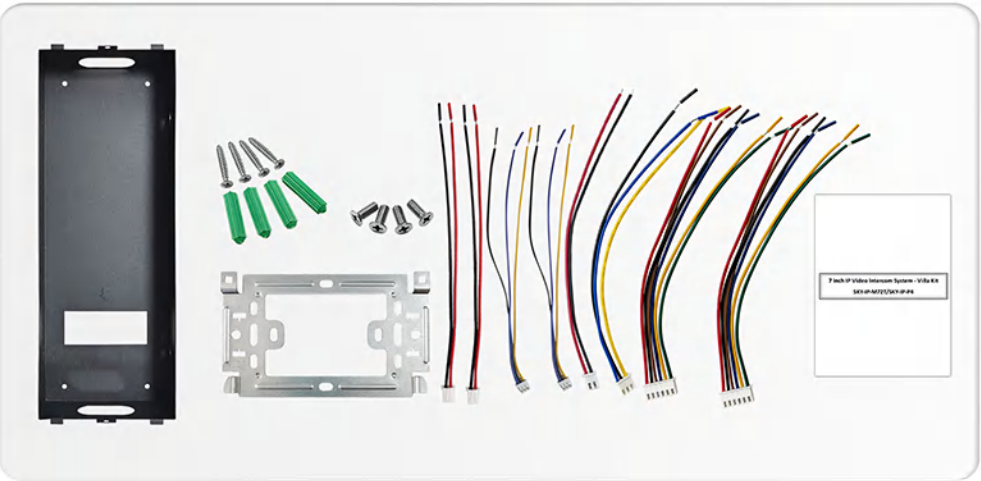
7 inch IP Video Intercom System - Villa Kit
SKY-IP-M721/SKY-IP-P4

Outdoor Station Installation



Drilling

Drill screw holes in the location of the wall mounting plate

Fix mounting box

Use glue or sealant to firmly bond the box to the wall.



Install outdoor station

Insert the outdoor station to the plate and fasten it with a screw.

Indoor Monitor Installation



Drilling

In the reserved hole on the wall, drill screw holes in the location of the wall mounting plate

Fix wall mounting plate

Fix the wall mounting plate to the wall with 2 screws

Hook indoor monitor

Hook the indoor monitor to the wall mounting plate tightly

Certification CE/FCC/RoHS, etc

Certificate of Conformity
RoHS
CE
Certificate of Conformity

UI And Language Can Be Customized

UI Interface

Multi Language

Customize Your Logo For Free If Over 200 Pcs

IP System-Apartment 1 to 1 Diagram

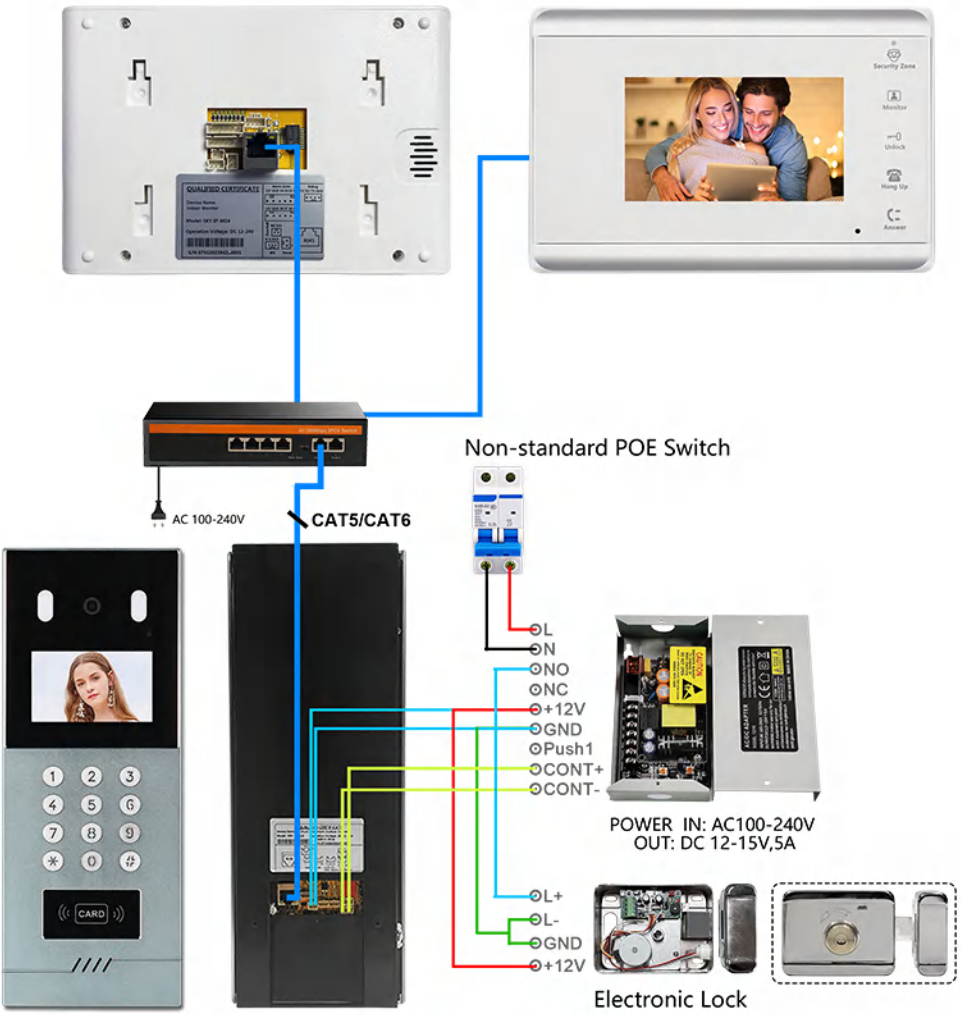
Non-standard POE Switch
AC 100-240V
CAT5/CAT6
L
N
NO
NC
+12V
GND
Push1
CONT+
CONT-
POWER IN: AC100-240V
OUT: DC 12-15V,5A
L+
L-
GND
+12V
Electronic Lock
CARD

IP Apartment Video Intercom Normal System Diagram

Support connect up 1-9999 pcs indoor monitor

Indoor Monitor

Indoor Monitor

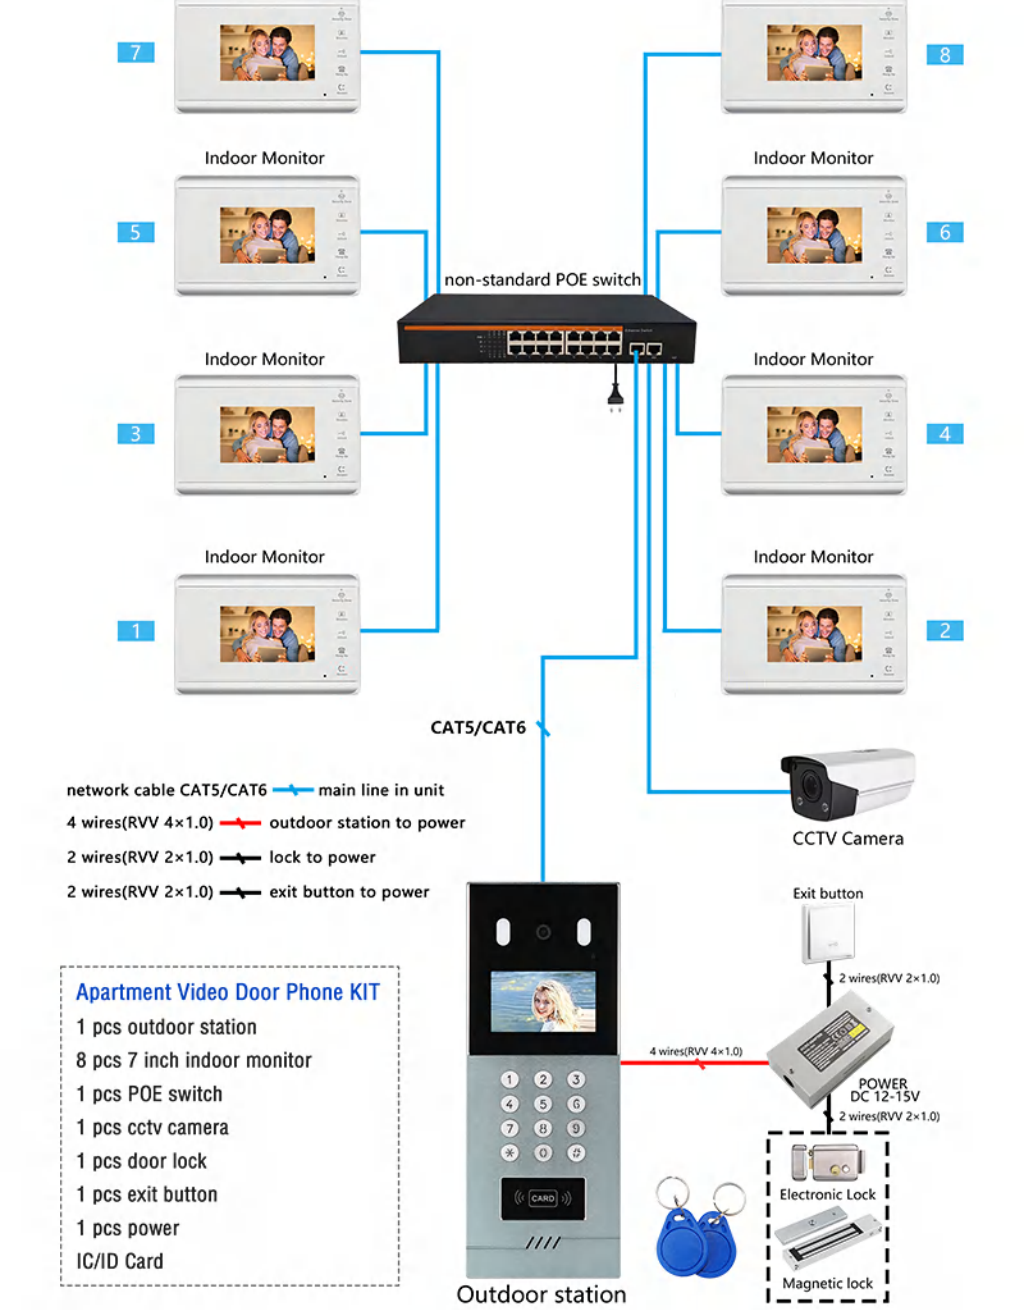
7
8
Indoor Monitor
Indoor Monitor
5
6
non-standard POE switch
Indoor Monitor
Indoor Monitor
3
4
Indoor Monitor
Indoor Monitor
1
2
CAT5/CAT6
network cable CAT5/CAT6 main line in unit
4 wires(RVV 4×1.0) outdoor station to power
2 wires(RVV 2×1.0) lock to power
2 wires(RVV 2×1.0) exit button to power
CCTV Camera
Exit button
2 wires(RVV 2×1.0)
4 wires(RVV 4×1.0)
POWER
DC 12-15V
2 wires(RVV 2×1.0)
CARD
Electronic Lock
Magnetic lock
Outdoor station

Apartment Video Door Phone KIT

1 pcs outdoor station
8 pcs 7 inch indoor monitor
1 pcs POE switch
1 pcs cctv camera
1 pcs door lock
1 pcs exit button
1 pcs power
IC/ID Card

IP Apartment Video Intercom Local LAN Networking System Digram

Support connect up 1-9999 pcs indoor monitor

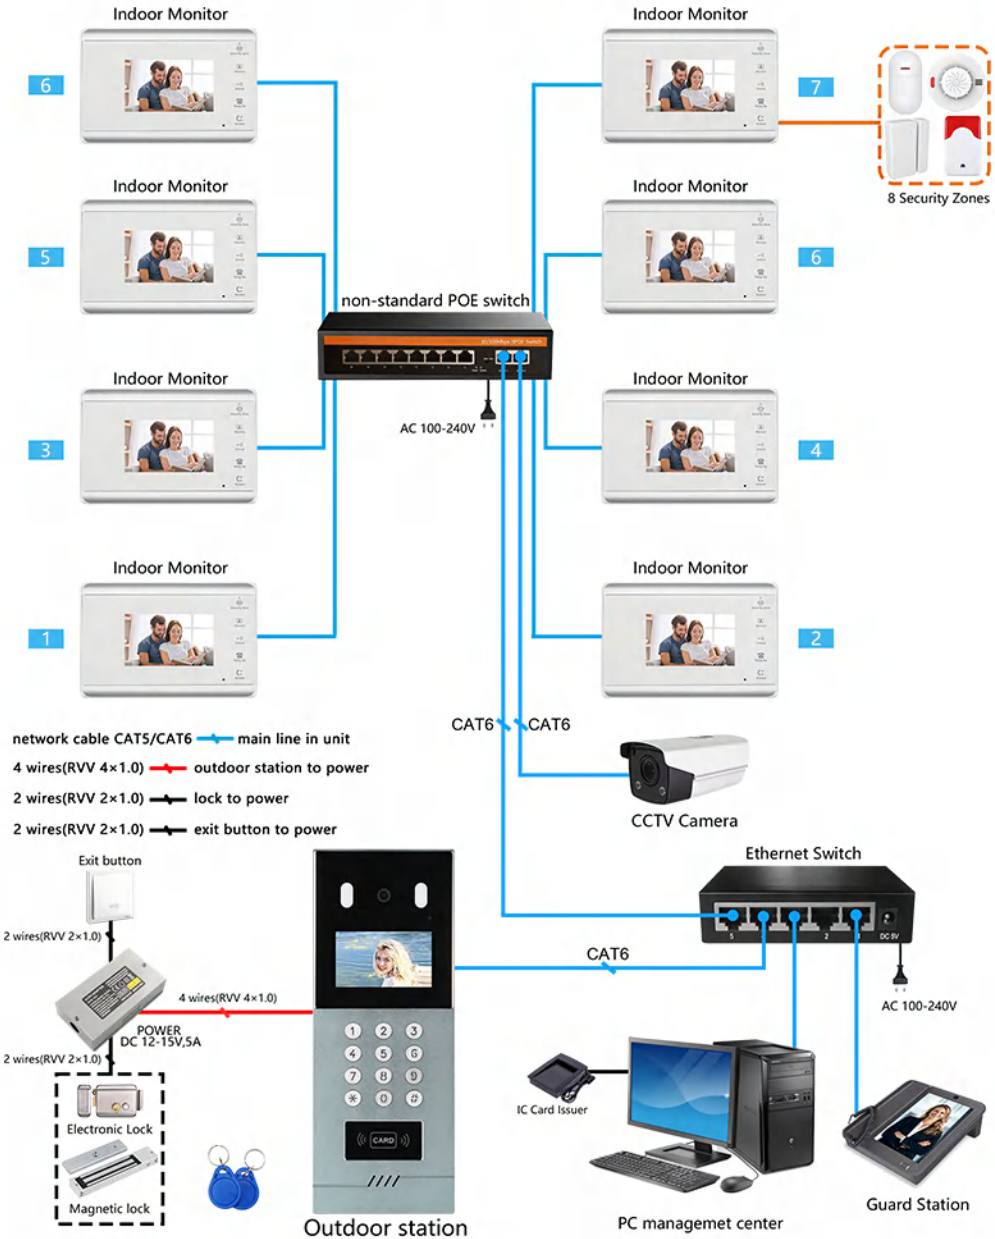
Indoor Monitor
6
Indoor Monitor
5
Indoor Monitor
3
Indoor Monitor
1
Indoor Monitor
7
8 Security Zones
Indoor Monitor
6
Indoor Monitor
4
Indoor Monitor
2
non-standard POE switch
AC 100-240V
CAT6
CAT6
CCTV Camera
network cable CAT5/CAT6 — main line in unit
4 wires(RVV 4×1.0) — outdoor station to power
2 wires(RVV 2×1.0) — lock to power
2 wires(RVV 2×1.0) — exit button to power
Exit button
2 wires(RVV 2×1.0)
4 wires(RVV 4×1.0)
POWER
DC 12-15V,5A
2 wires(RVV 2×1.0)
Electronic Lock
Magnetic lock
Outdoor station
CAT6
Ethernet Switch
AC 100-240V
IC Card Issuer
PC managemet center
Guard Station

Specifications And Parameters

INDOOR MONITOR

Model	IP-M16
Display Scree	4.3 inch TFT LCD
Resolution	480*320 pixels
System	Linux system
Network Transmission Mode	TCP/IP protocol
Connection	Network cable CAT5/CAT6
Color	White / customize
Language	English / Turkish / Spanish / French /Customize
Material	ABS Plastic + PET
Charge	Non-standard POE switch / Power adapter (DC12-24V)
Operation Voltage	DC 12-24V
Operation Current	≤500mA
Operation Temperature	-30°C~+60°C
Dimensions	190*126*15mm
Installation	Wall-mounted

OUTDOOR STATION

Model	IP-D22
Display	4.3 TFT LCD
Camera	1080P , 2 MP , 1 camara
Resolution	480*272 pixels
Material	Aluminum alloy shell + Metal physical press button
Network Transmission Mode	TCP/IP protocol
Connection	CAT5/ CAT6
Ethernet Interface	RJ45
Charge	Non-standard POE switch / Power
IC Card Capacity	No limited
Operation Current	≤500mA
Operation Voltage	DC12-15V
Operation Temperature	-40°C~ +70°C
Outline Dimensions	360*140*50mm
Installation Dimensions	350*130*50mm
Installation	Wall-mounted or Embedded