


IP WIFI TUYA Apartment Video Intercom With Face Recognition



Touch Screen

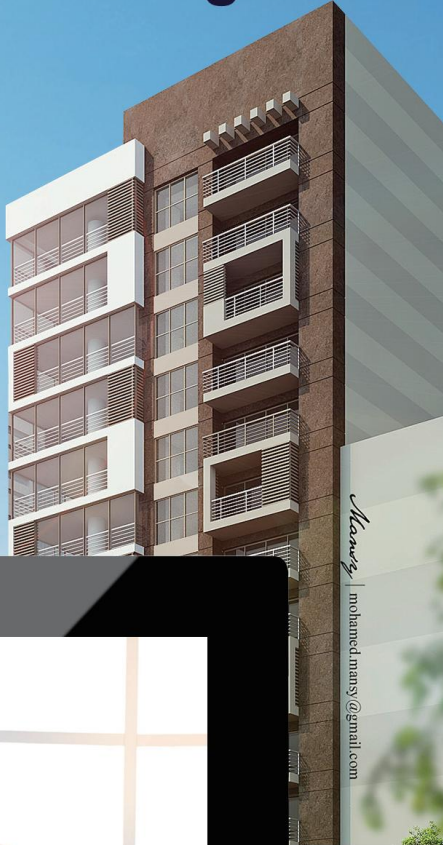

Monitoring



150° Wide Angle



Snapshot



Night Vision



2MP



Multi Language



Call Monitor



Dual-way
Call/Talk



Unlock Door




IP Waterproof



Enter Room no to Call

Suitable For Various Environments



Four specifications are available



Product Size



WIFI Tuya IP 7 Inch Indoor Monitor (Black and White)



Multi Language



Touch Screen



Snapshot



Dual-way Call/Talk



Monitoring




Security Alarm



Connect detector:
S1 S2 S3 S4 GND 12V

Speaker

Bracket slot

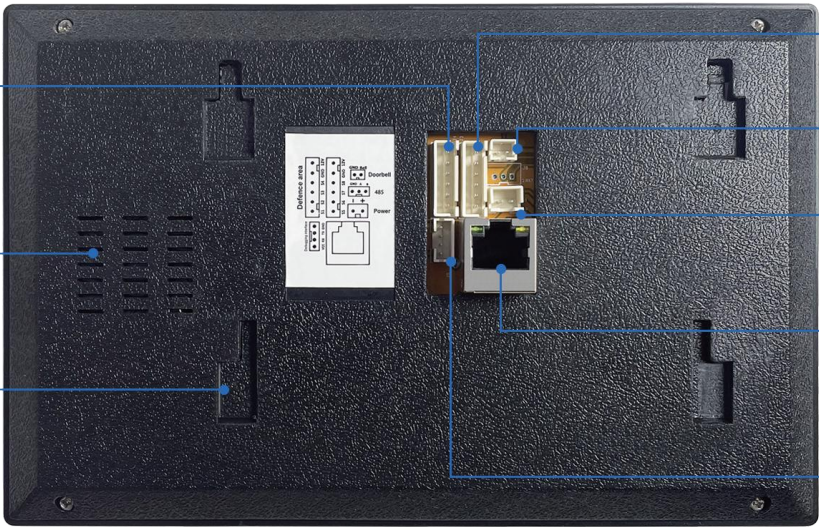


Connect detector:
S5 S6 S7 S8 GND 12V

Bell GND:
Connect doorbell

V+ V-:
Connect Power Adpter

RJ45


Debug Software:
VCC RX TX GND

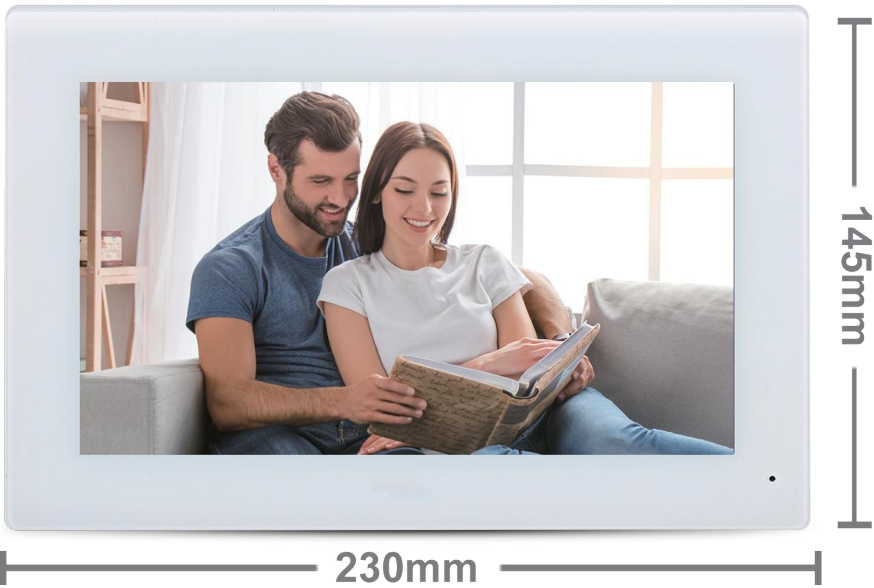

Connect detector:
S1 S2 S3 S4 GND 12V

Speaker

Bracket slot

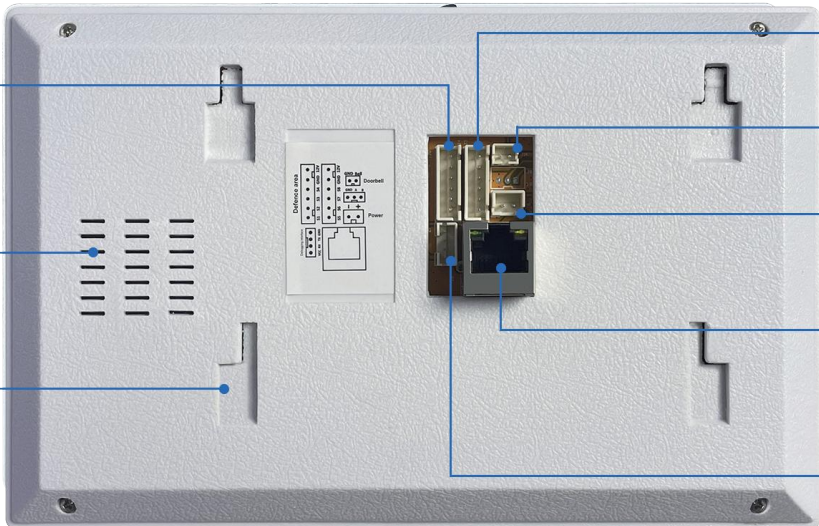

Connect detector:
S5 S6 S7 S8 GND 12V

Bell GND:
Connect doorbell

V+ V-:
Connect Power Adpter

RJ45

Debug Software:
VCC RX TX GND

Dual Way Intercom / Unlock

Wall Mounted




The door is open, please come in

Hello! Package Delivery



Room to Room Call

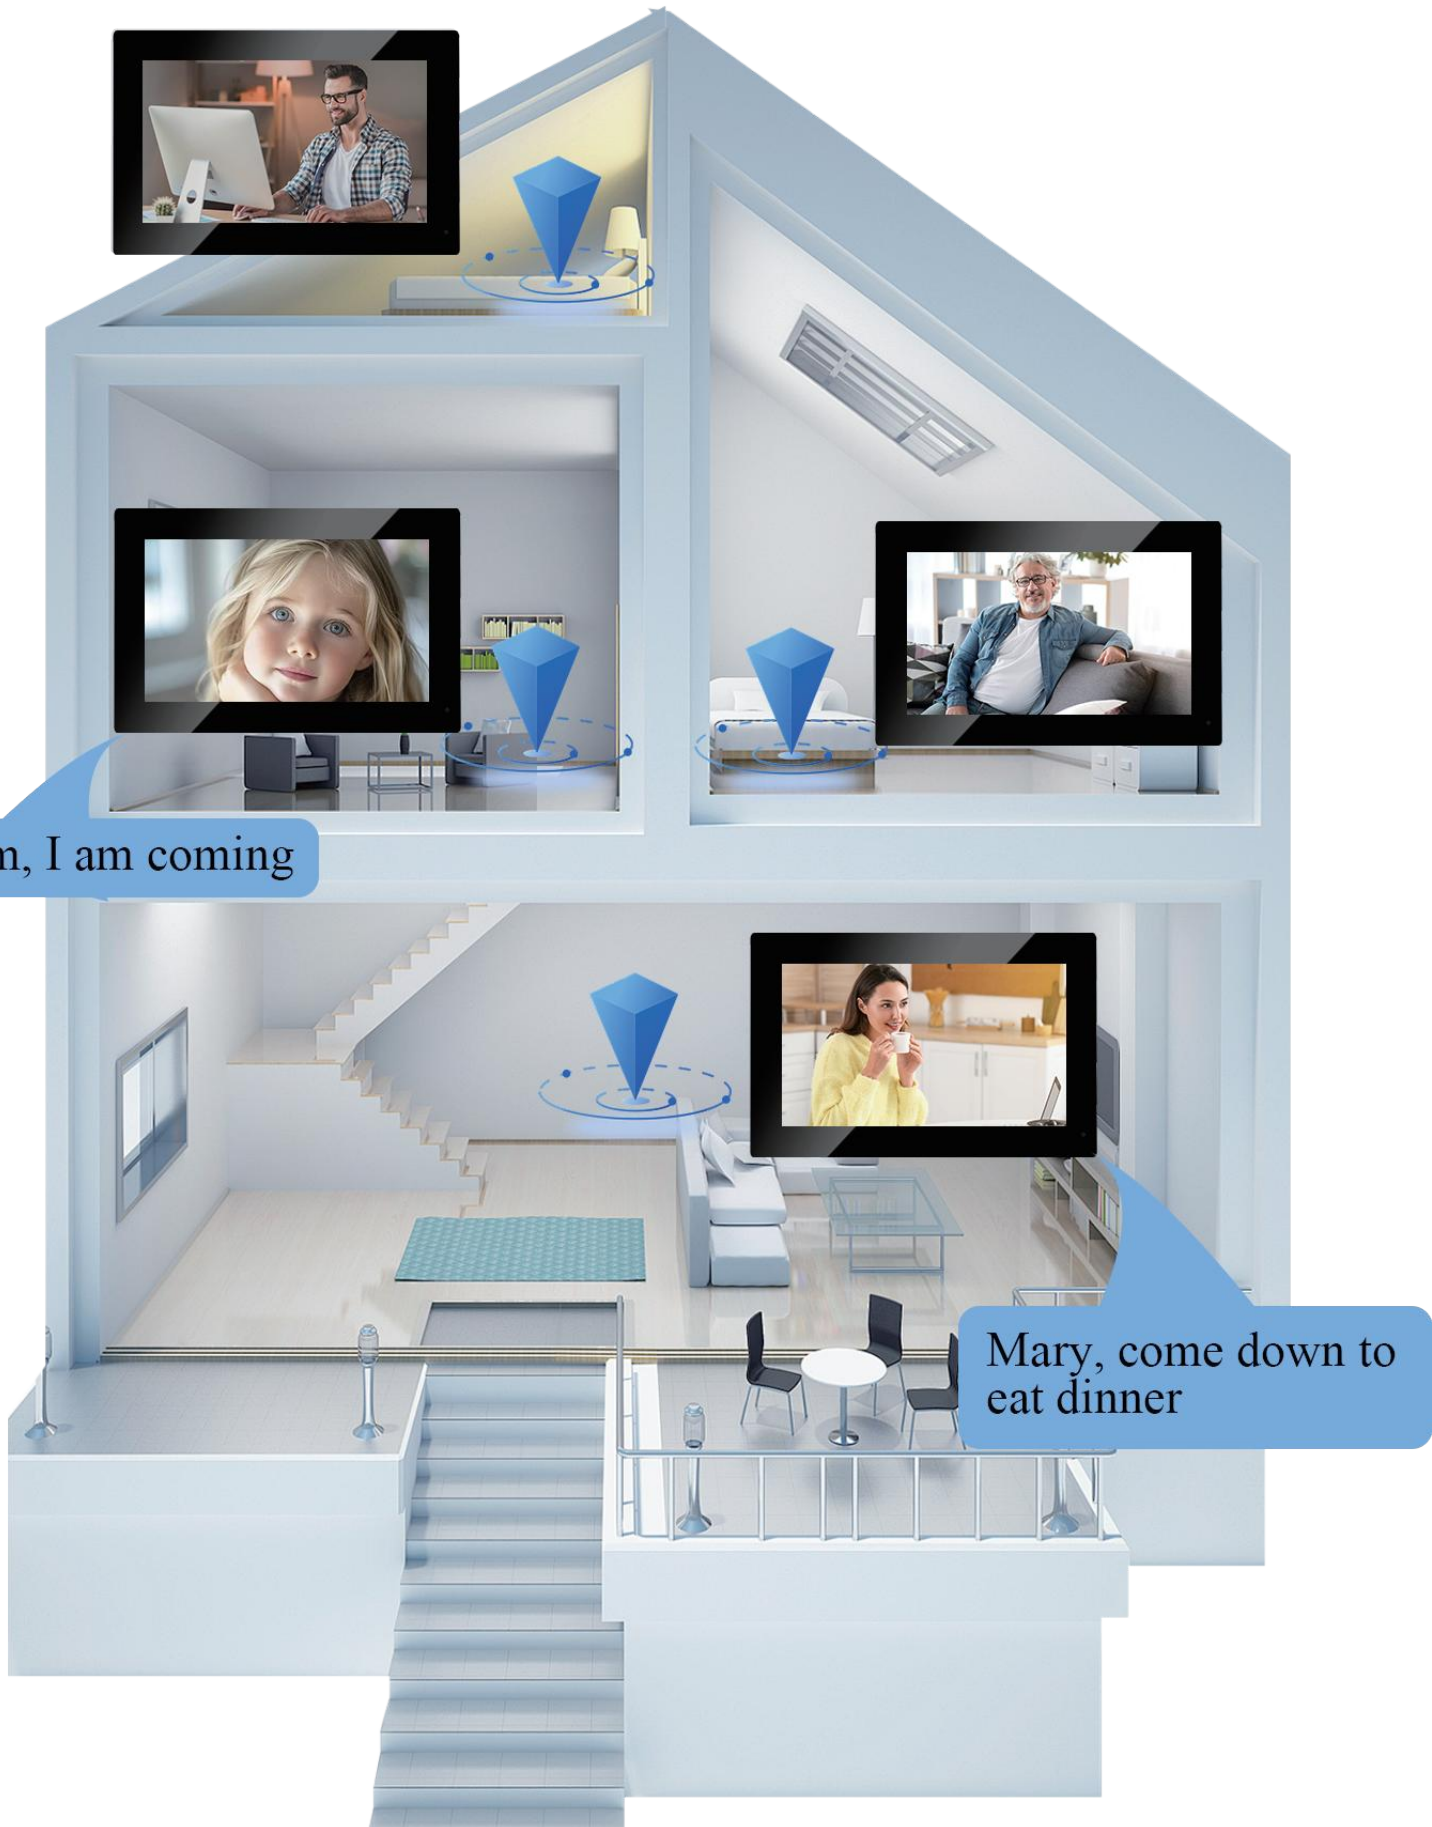

Flat to Flat Call



Thank you for your invitation, Annie.



Hi, Lisa, welcome to my home to join the party.

Multi Unlock Ways

Swipe Card Unlock



PC Software Unlock



Indoor Monitor Unlock



Administrator Guard Station Unlock



1080P 2MP HD Camera With Night Vision




Day Vision



Night Vision

1080P 2MP HD Camera

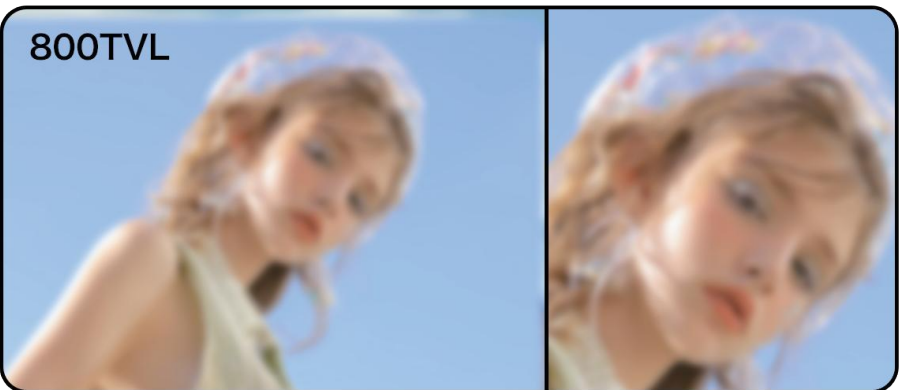

Weather Protection And Durable Use



IP waterproof



Dustproof



Weatherproof



Low & High Temperature:
-40°C~+70°C



Low And High Temperature Working

-40°C

+70°C




PC Management And Guard Station Manage



Multi Working Mode


At Home Mode

When visitor input the room number to call, indoor monitor and mobile phone will ring to remind resident to check who is calling and talk with him. Then click the unlock button to open the door.

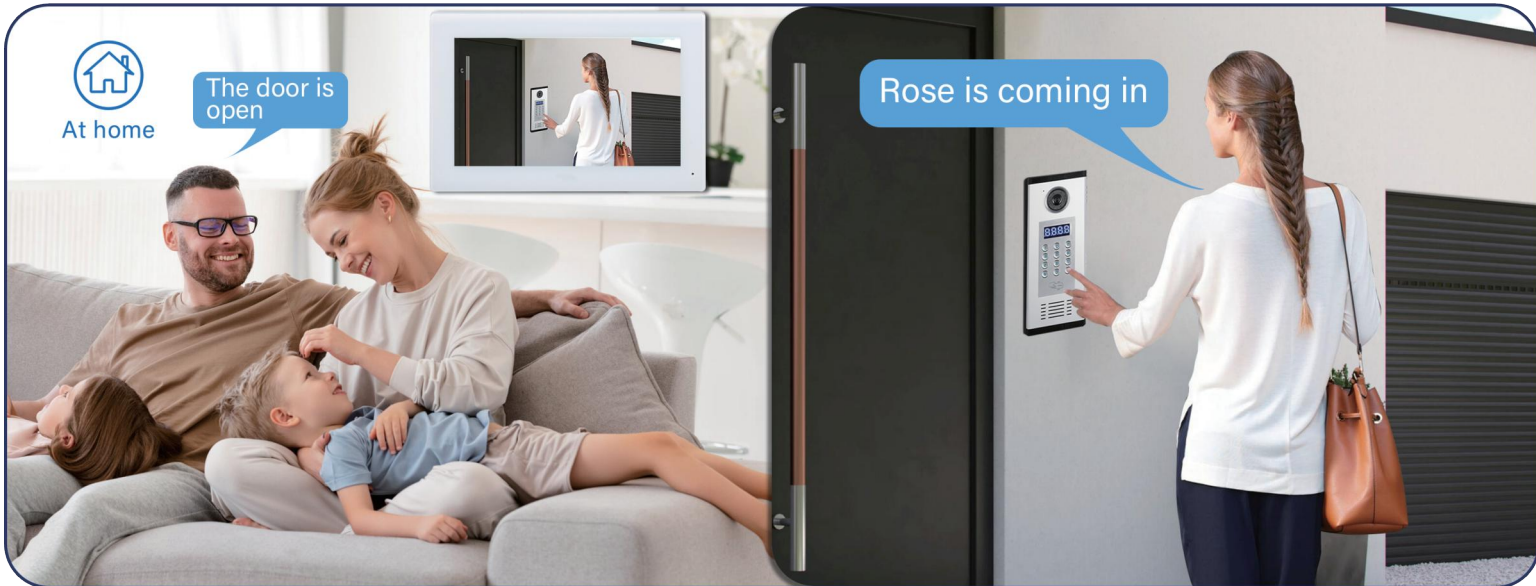

Sleep Mode

The resident can click mute button if somebody call you at night. It won't bother you if you open mute mode.

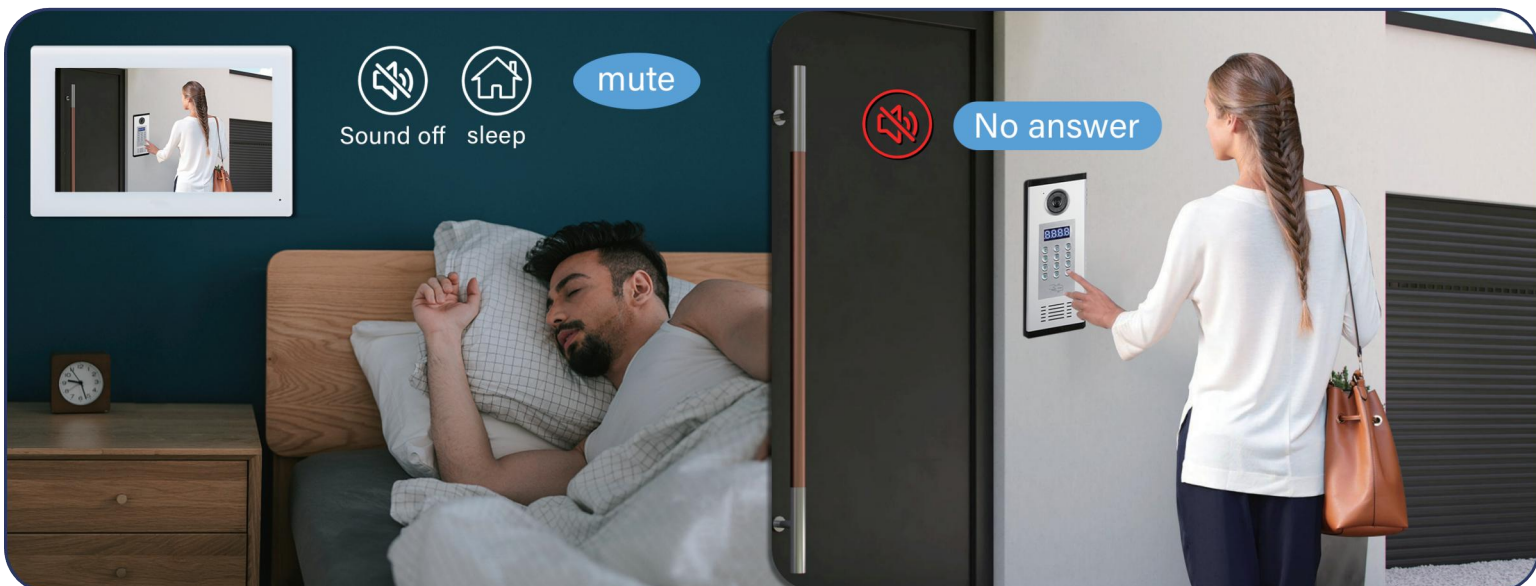

Record

Record



Message



Arm Record



Alarm Record



Photo Record




Call Record





Voice Msg Reco



Security And Alarm 8 Defense Zones

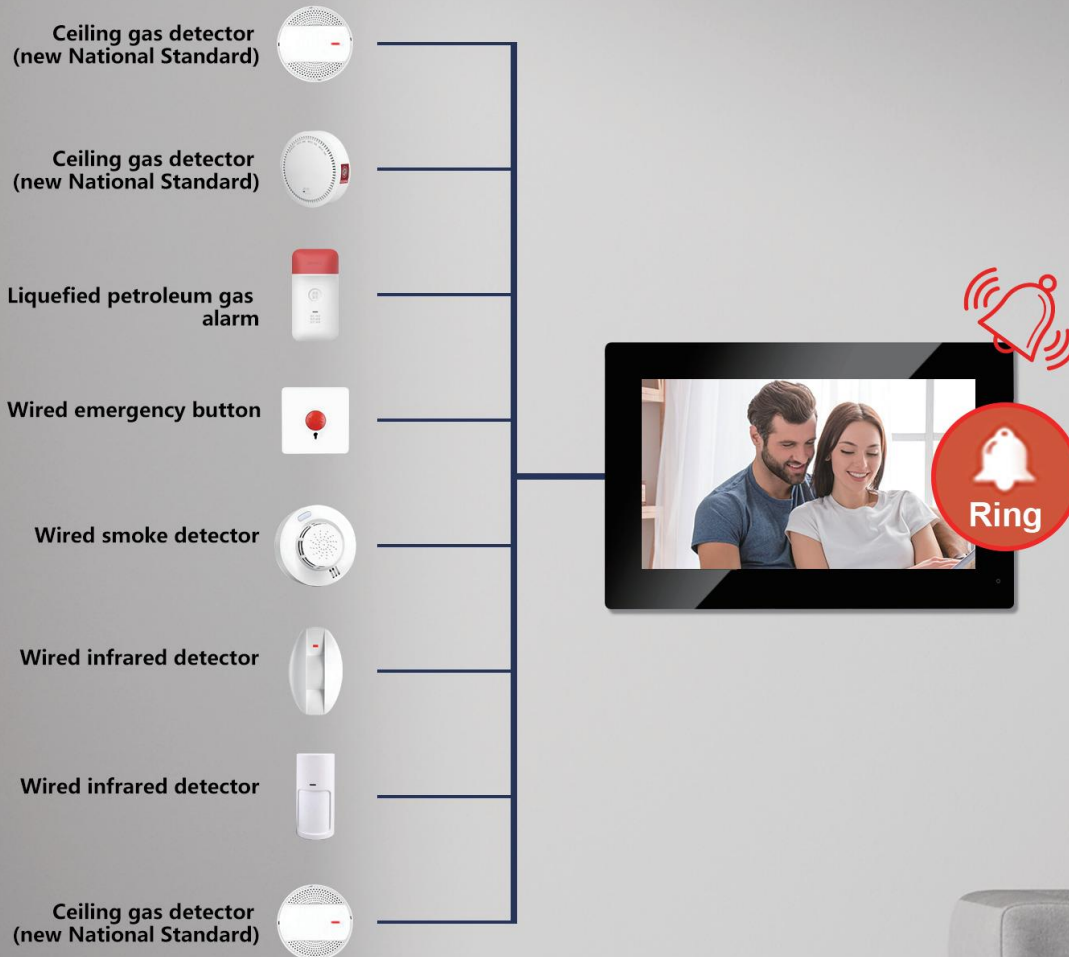


Accessories For Mounting

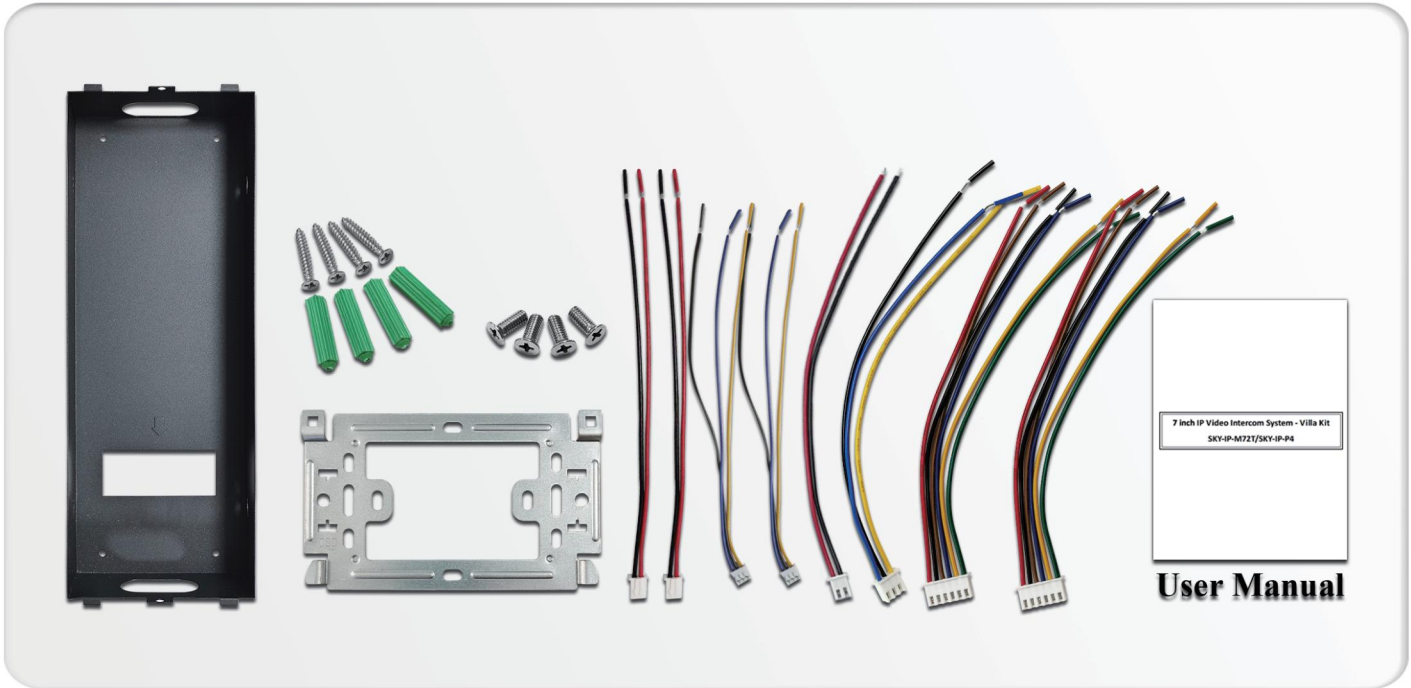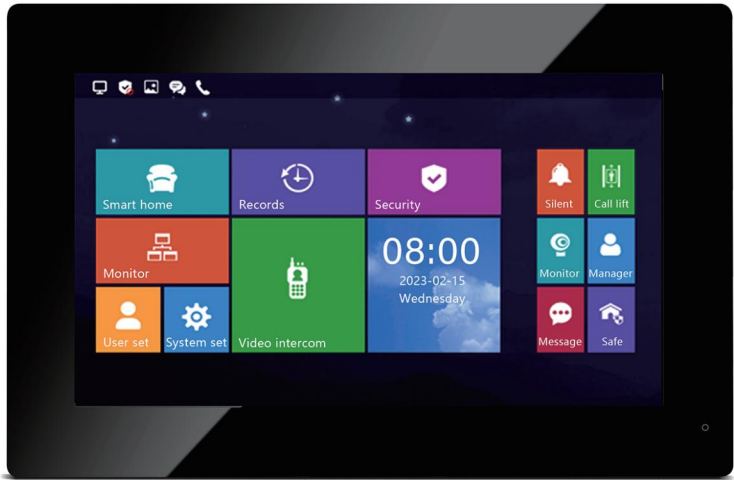

7 inch IP Video Intercom System - VIBa Kit
SKY-IP-M72T/SKY-IP-P4

User Manual

Outdoor Station Installation

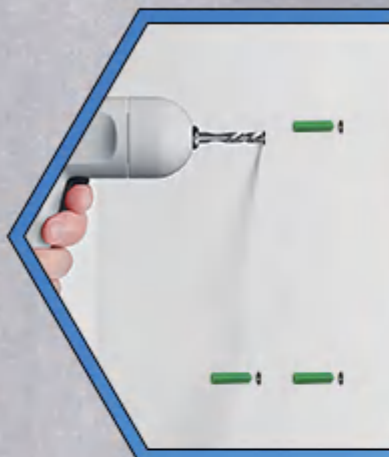

Drilling

Drill screw holes in the location of the wall mounting plate



Fix mounting box

Use glue or sealant to firmly bond the box to the wall.



Install outdoor station

Insert the outdoor station to the plate and fasten it with a screw.

Indoor Monitor Installation



Drilling

In the reserved hole on the wall, drill screw holes in the location of the wall mounting plate



Fix wall mounting plate

Fix the wall mounting plate to the wall with 2 screws



Hook indoor monitor

Hook the indoor monitor to the wall mounting plate tightly

Certification CE/FCC/RoHS, etc



UI And Language Can Be Customized



UI Interface




Multi Language

Customize Your Logo For Free If Over 200 Pcs




IP System-Apartment 1 to 1 Diagram

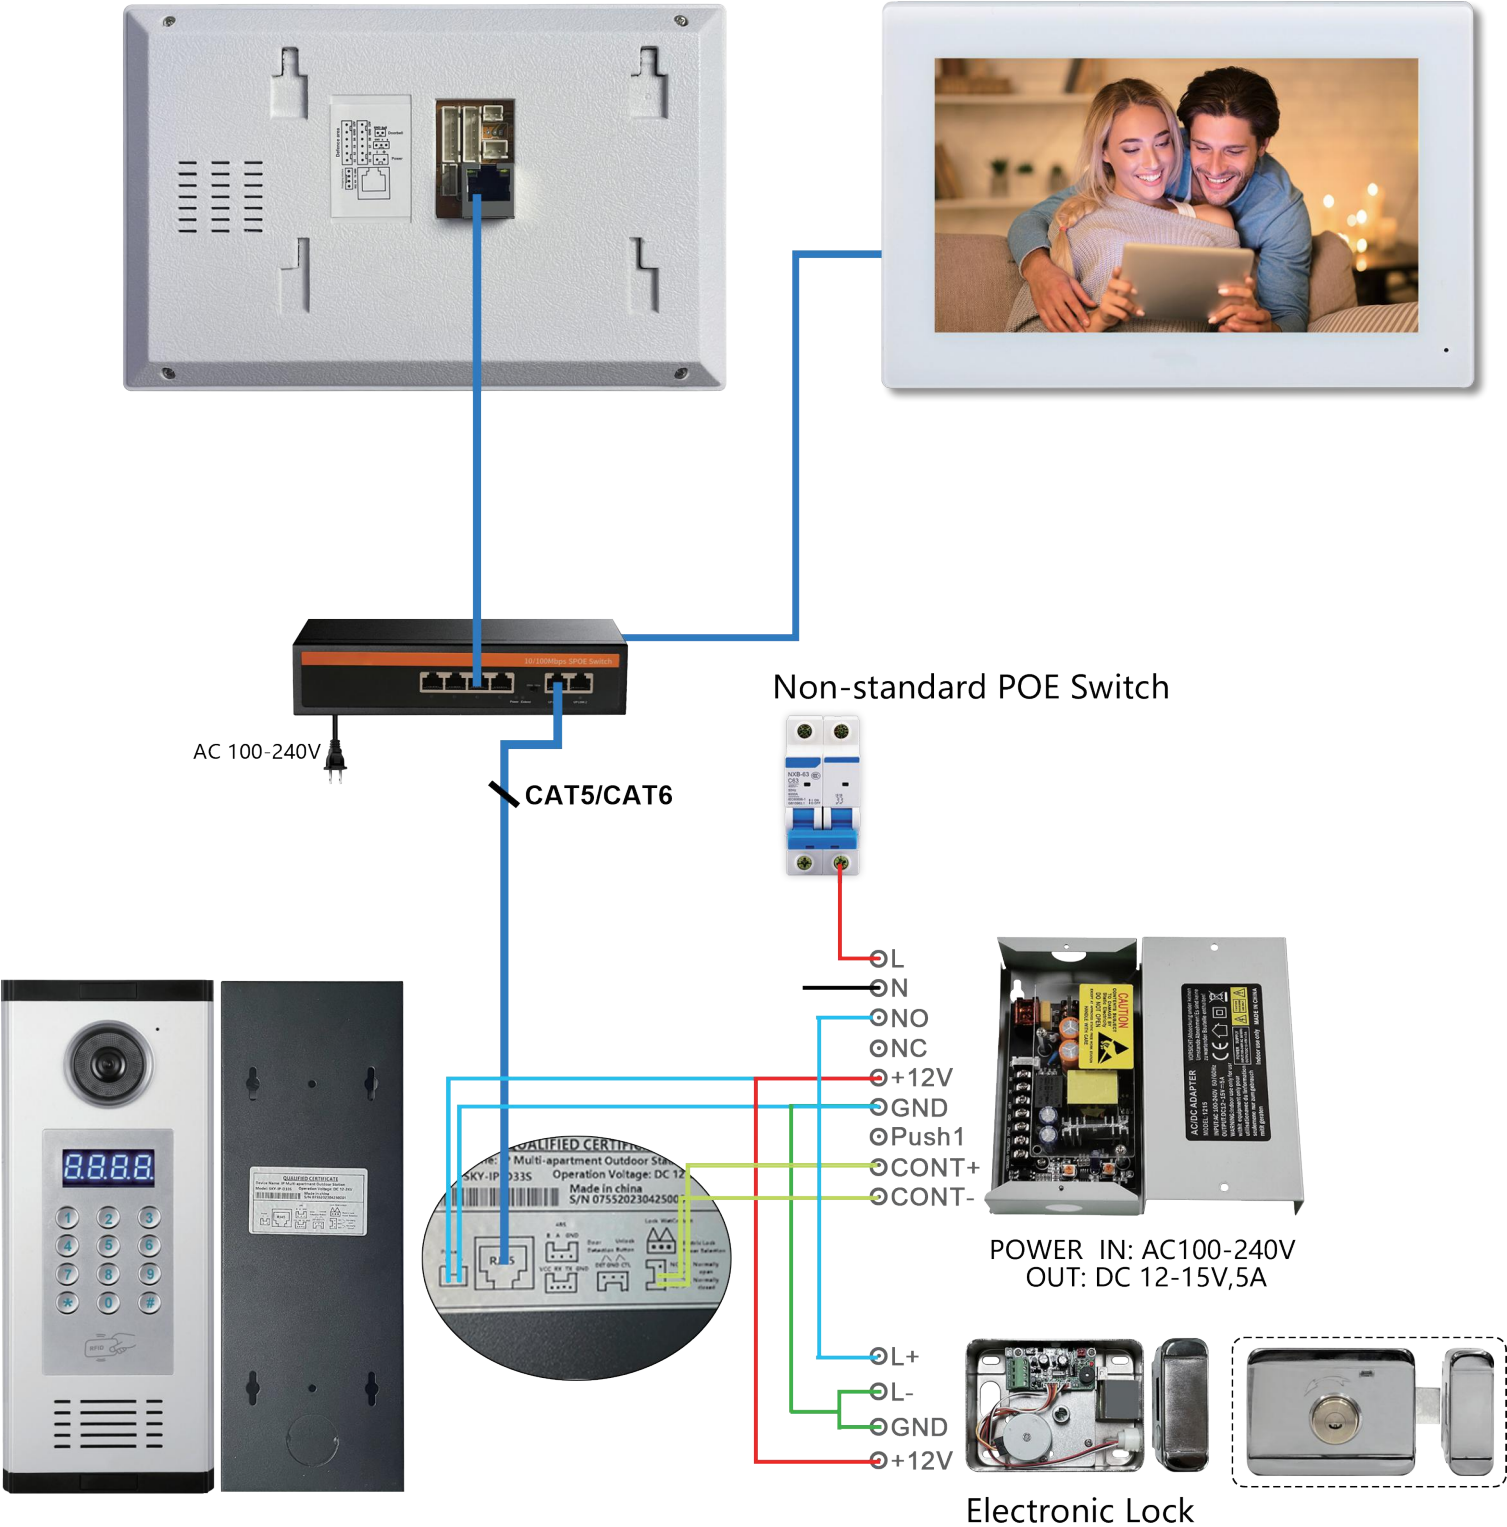

IP Apartment Video Intercom Normal System Diagram

Support connect up 1-9999 pcs indoor monitor

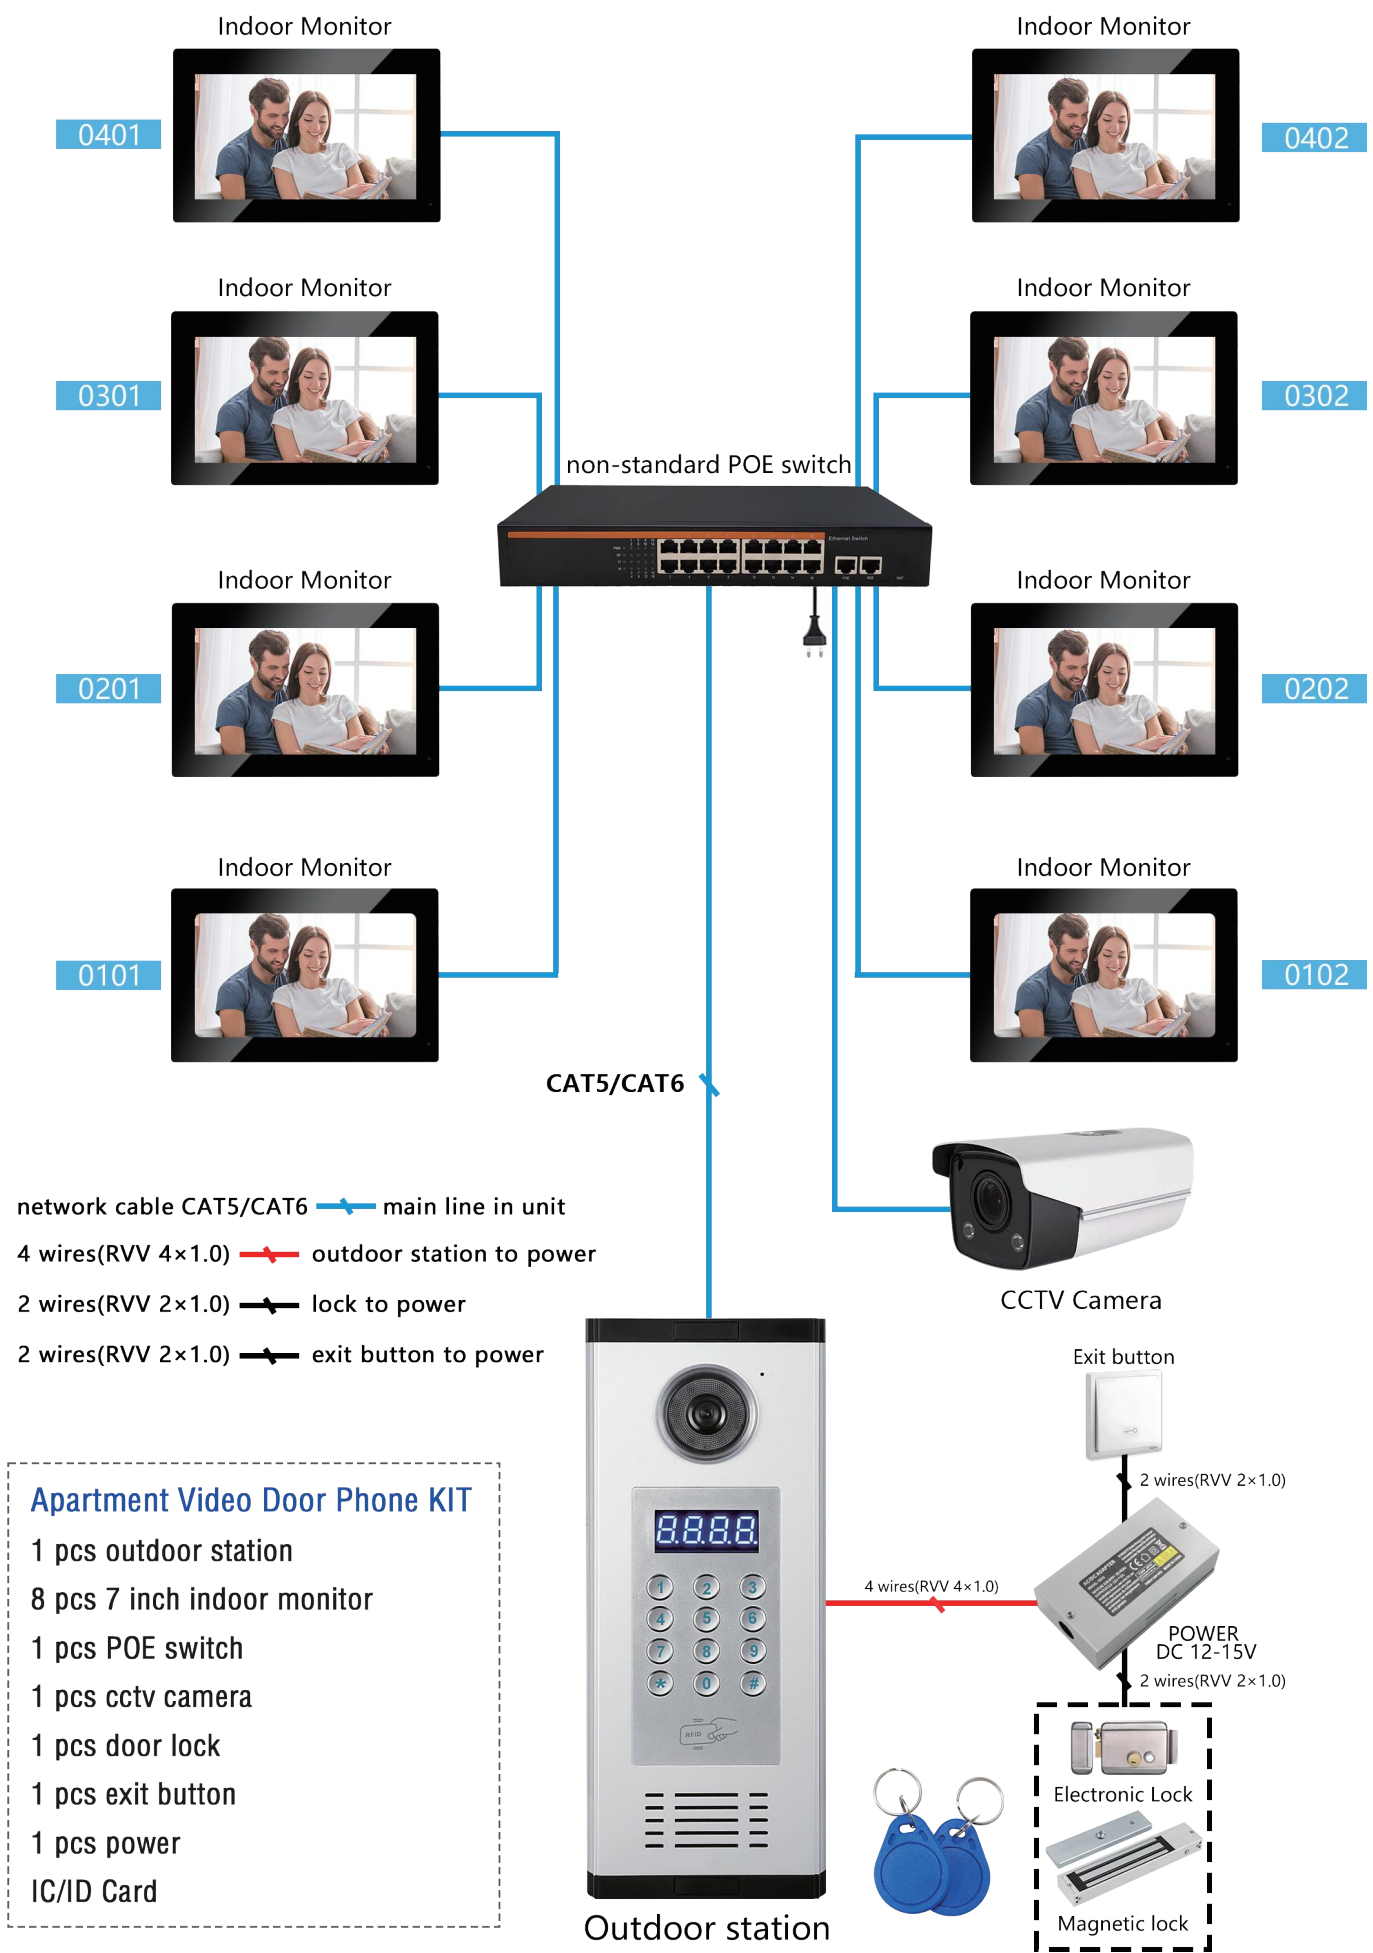

network cable CAT5/CAT6 main line in unit
4 wires(RVV 4×1.0) outdoor station to power
2 wires(RVV 2×1.0) lock to power
2 wires(RVV 2×1.0) exit button to power

- Apartment Video Door Phone KIT
- 1 pcs outdoor station
 - 8 pcs 7 inch indoor monitor
 - 1 pcs POE switch
 - 1 pcs cctv camera
 - 1 pcs door lock
 - 1 pcs exit button
 - 1 pcs power
 - IC/ID Card

Outdoor station

CCTV Camera

Exit button


POWER
DC 12-15V

Electronic Lock

Magnetic lock

IP Apartment Video Intercom Local LAN Networking System Digram

Support connect up 1-9999 pcs indoor monitor

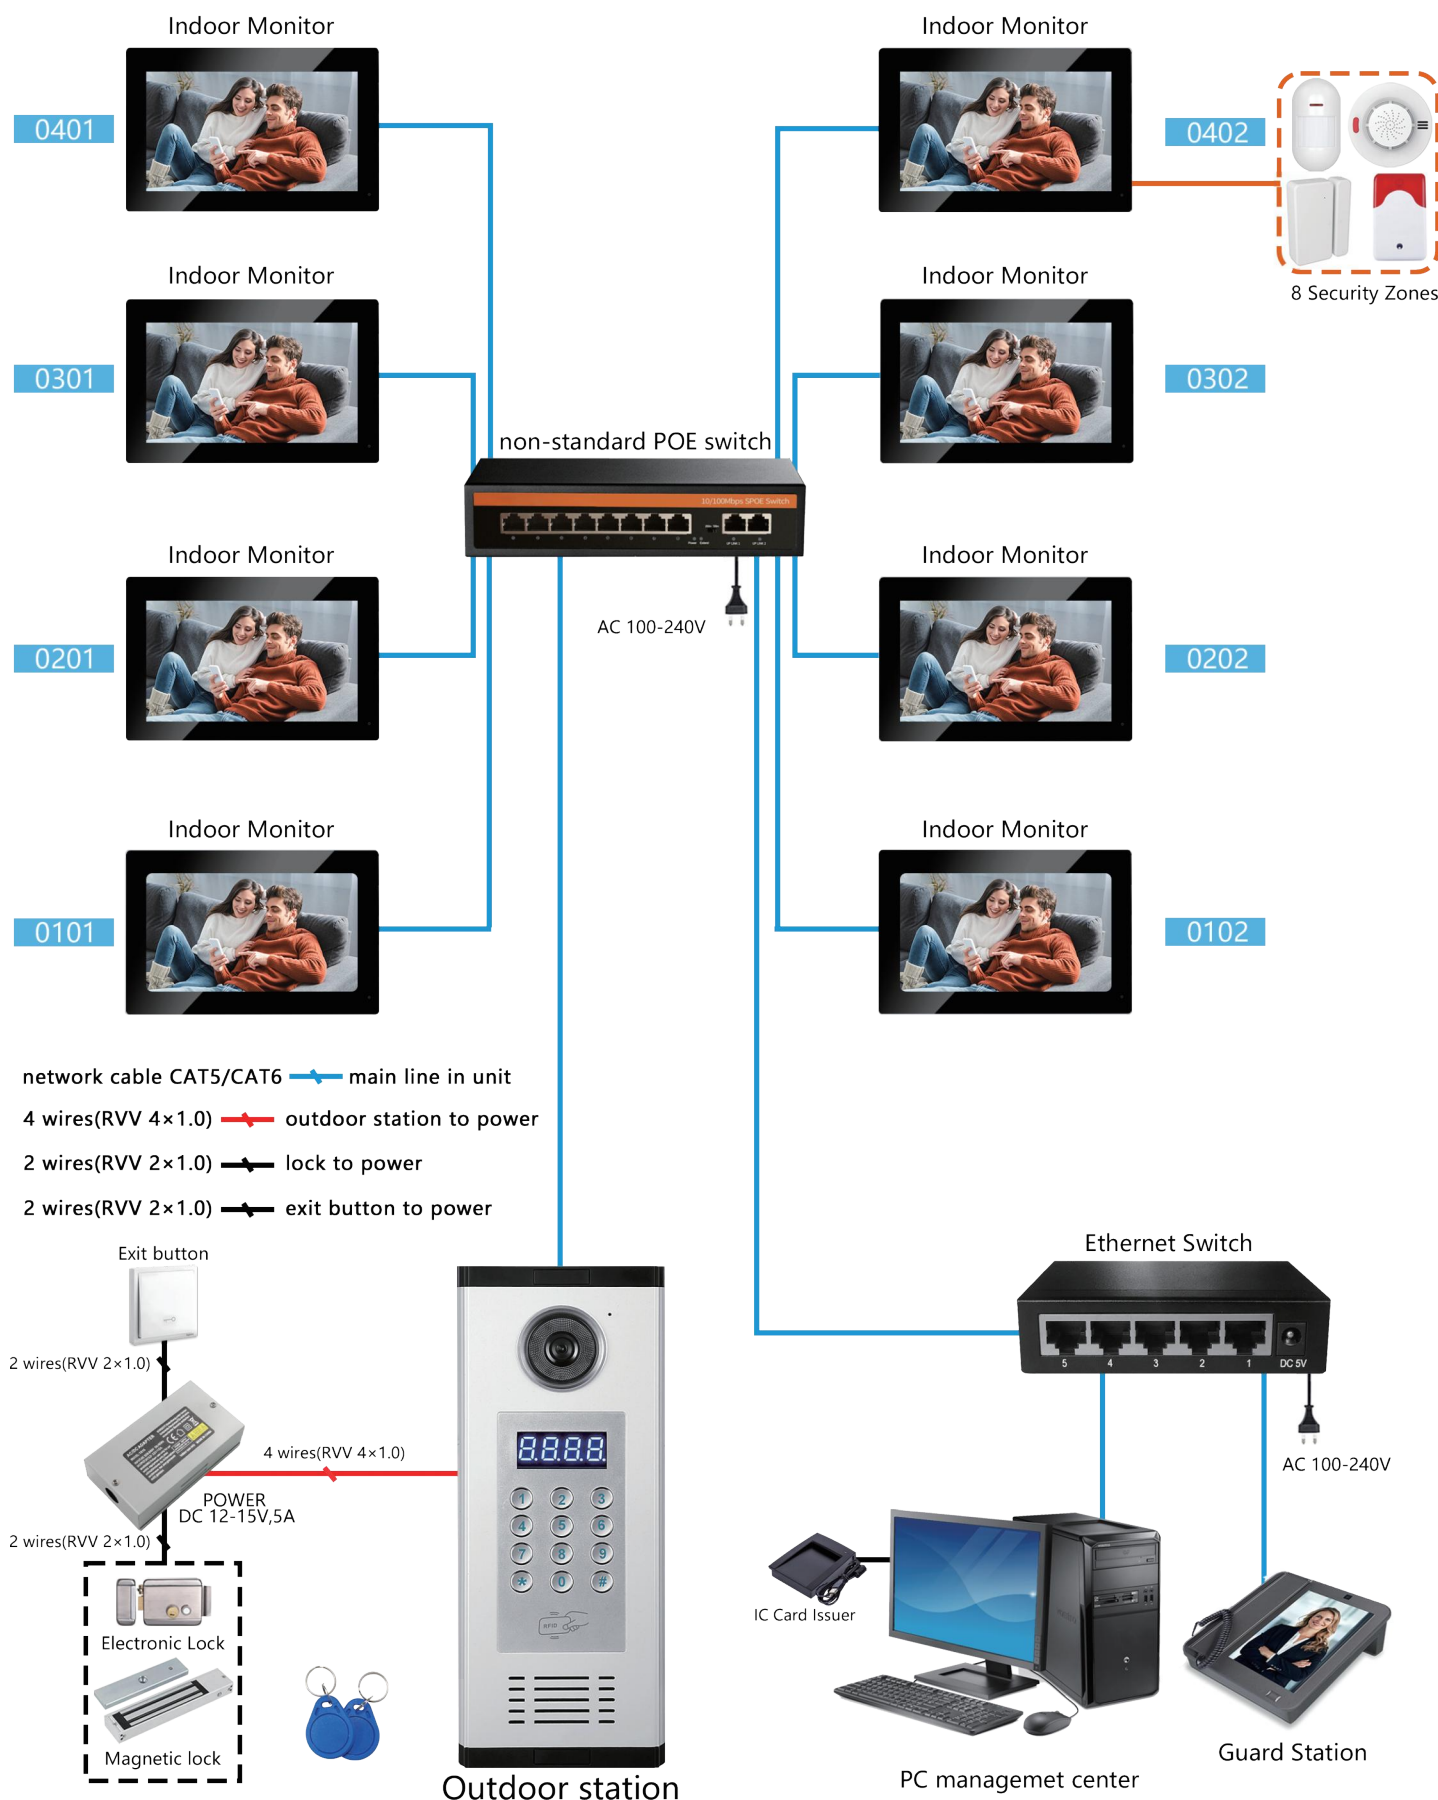

Specifications And Parameters

INDOOR MONITOR

Model	IP-M72T
Display Screen	7 inch TFT LCD
Resolution	1024*600 pixels
System	Linux system
Network Transmission Mode	TCP/IP protocol
Connection	network cable CAT5/CAT6
Color	black / white / customize
Language	Chinese/ English/ Customize
Material	ABS Plastic + PET
App	Tuya, Smart Life
Charge	non-standard POE switch / Power adapter (DC12-24V)
Ethernet interface	RJ45
Operation Voltage	DC 12-24V
Operation Current	≤500mA
Operation Temperature	-30℃~+60℃
Dimensions	190*122*17mm
Installation	Wall mounted

OUTDOOR STATION

Model	SKY-IP-D33S
Resolution	1080P 2 MP , 1 Camera
Display	LED Segment Display
Material	Aluminum alloy shell + Metal physical press button
Network Transmission Mode	TCP/IP protocol
Connection	CAT5/ CAT 6
thernet interface	RJ45
Charge	non-standard POE switch / Power
IC Card Capacity	≥20000
Operation Current	≤500mA
Operation Voltage	DC 12-15V
Operation Temperature	-40℃~ +70℃
Outline Dimensions	323*130*40mm
Installation Dimensions	298*113*33mm
Installation	Wall-mounted or Embedded