

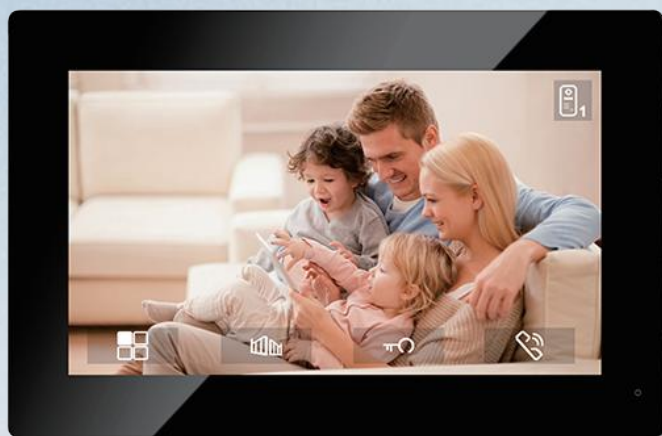


# 7 Inch Villa Kit Video Door Phone Intercom




SKY-LNX-M72T



SKY-LNX-P5

Smart and Security For Your Home

# Suitable For Various Environments

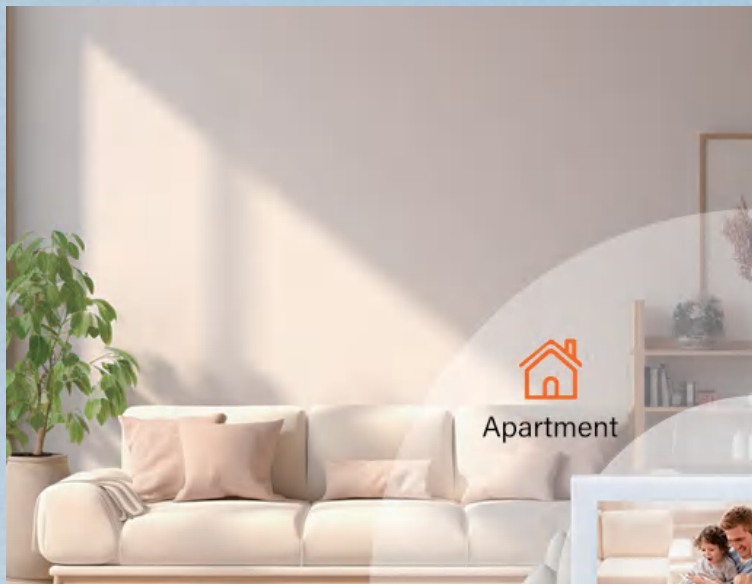




# Beautiful & High Quality Package






- 1.Net Weight: 1.3 kg
- 2.Carton Size: 12 Kits / Carton

# Customize Box Package For Free If Over 600 Kits

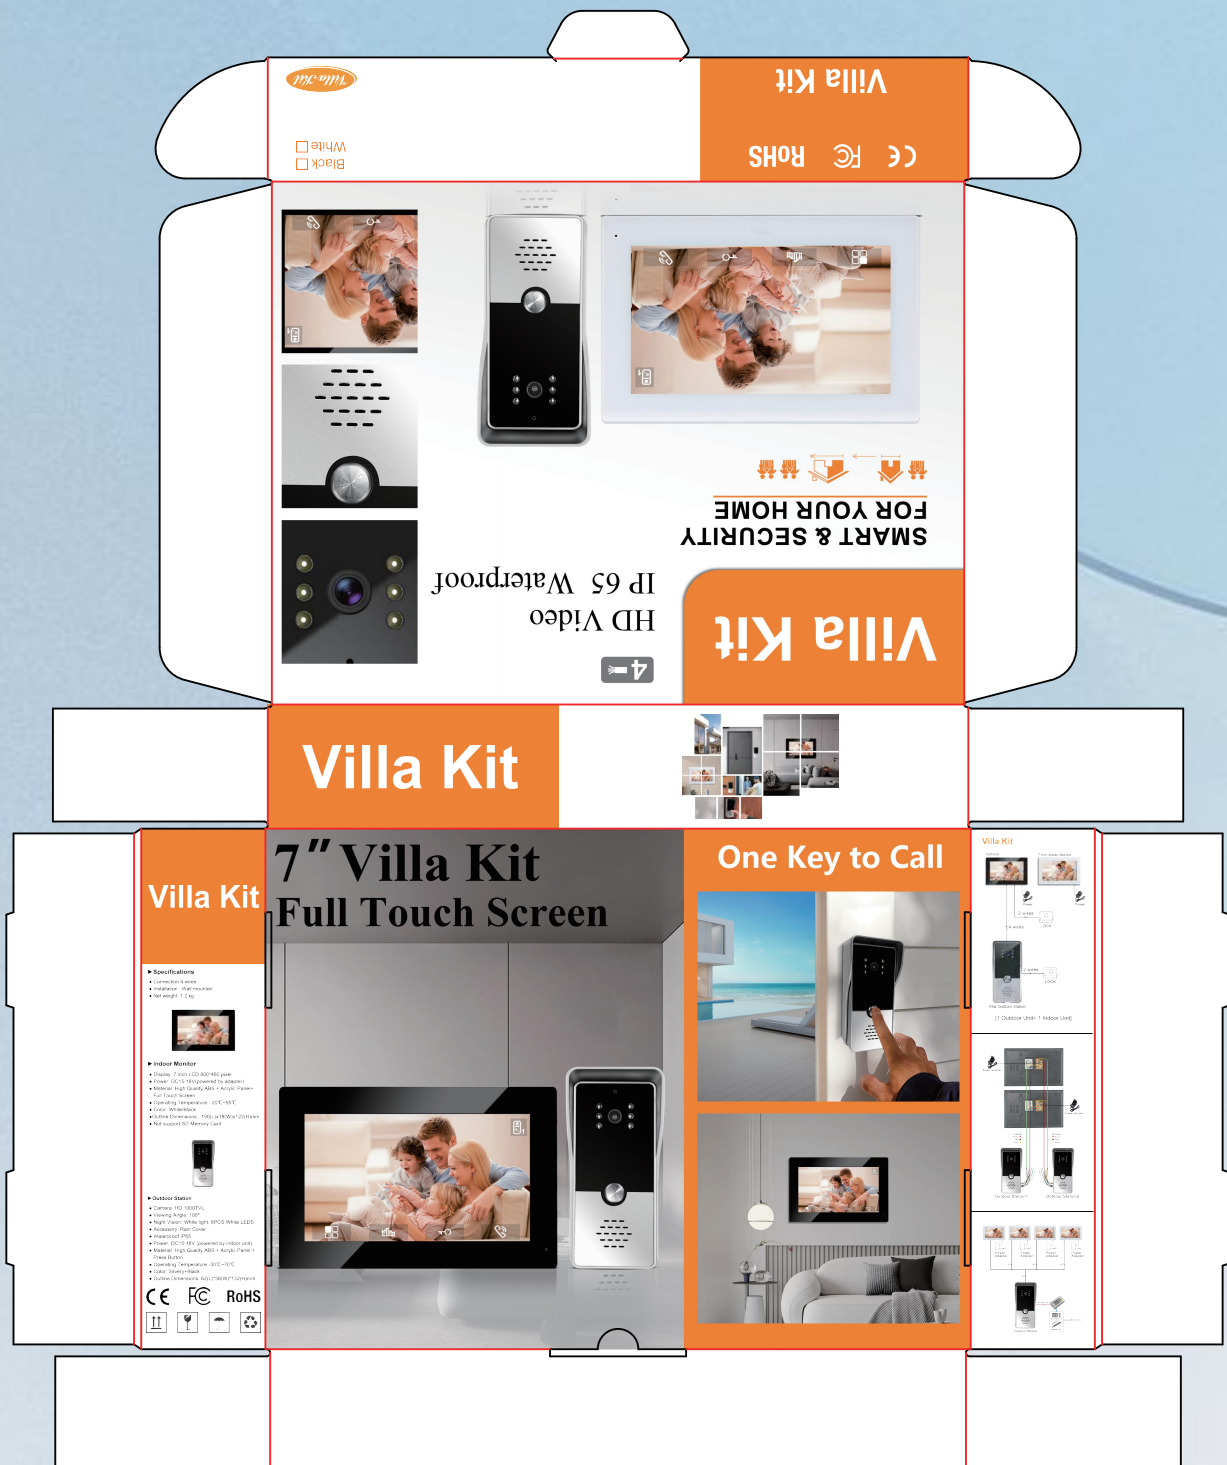

Do What You Want

# 7 Inch Indoor Monitor (White)

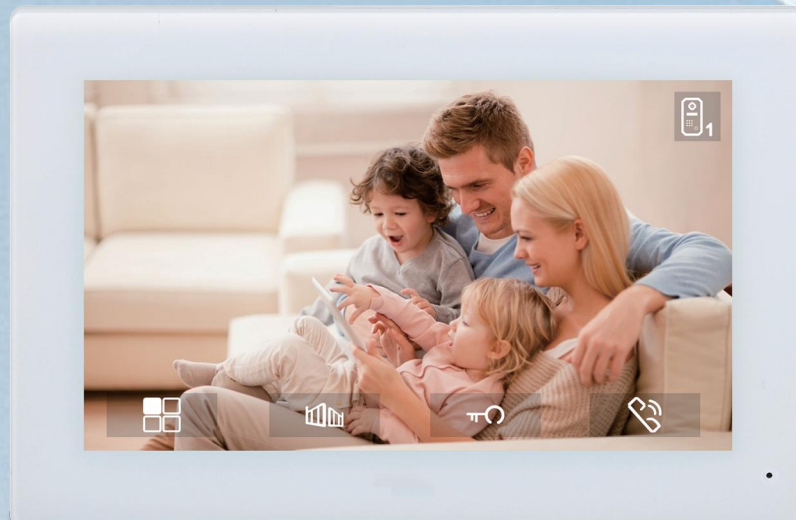

122mm




18mm

190mm

Call Panel 2/Audio  
GND Power Video

Speaker

Bracket slot

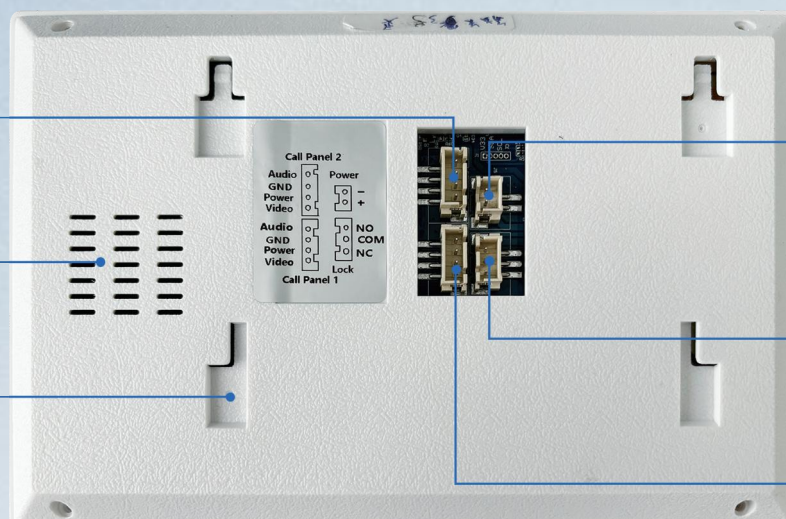

Power/ - +

Lock/ NO COM NC

Call Panel 1/Audio  
GND Power Video



# 7 Inch Indoor Monitor (Black)



122mm




18mm

190mm

Call Panel 2/Audio  
GND Power Video

Speaker

Bracket slot

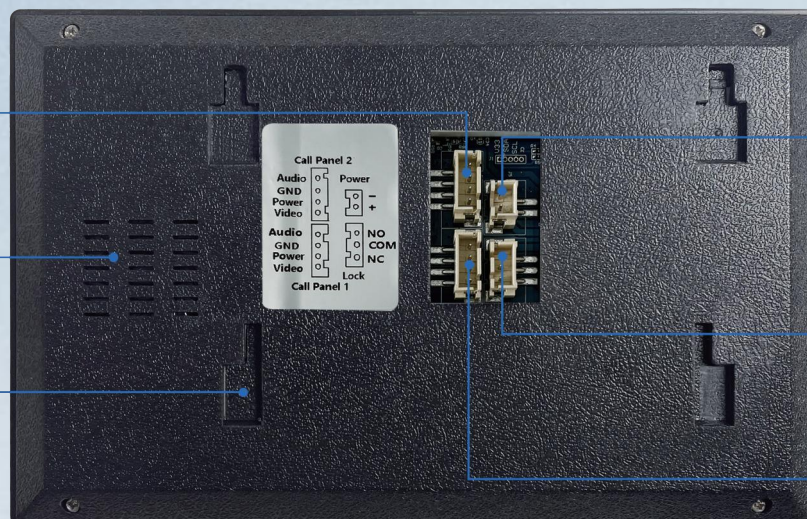


Power/ - +

Lock/ NO COM NC

Call Panel 1/Audio  
GND Power Video


# Outdoor Station Details

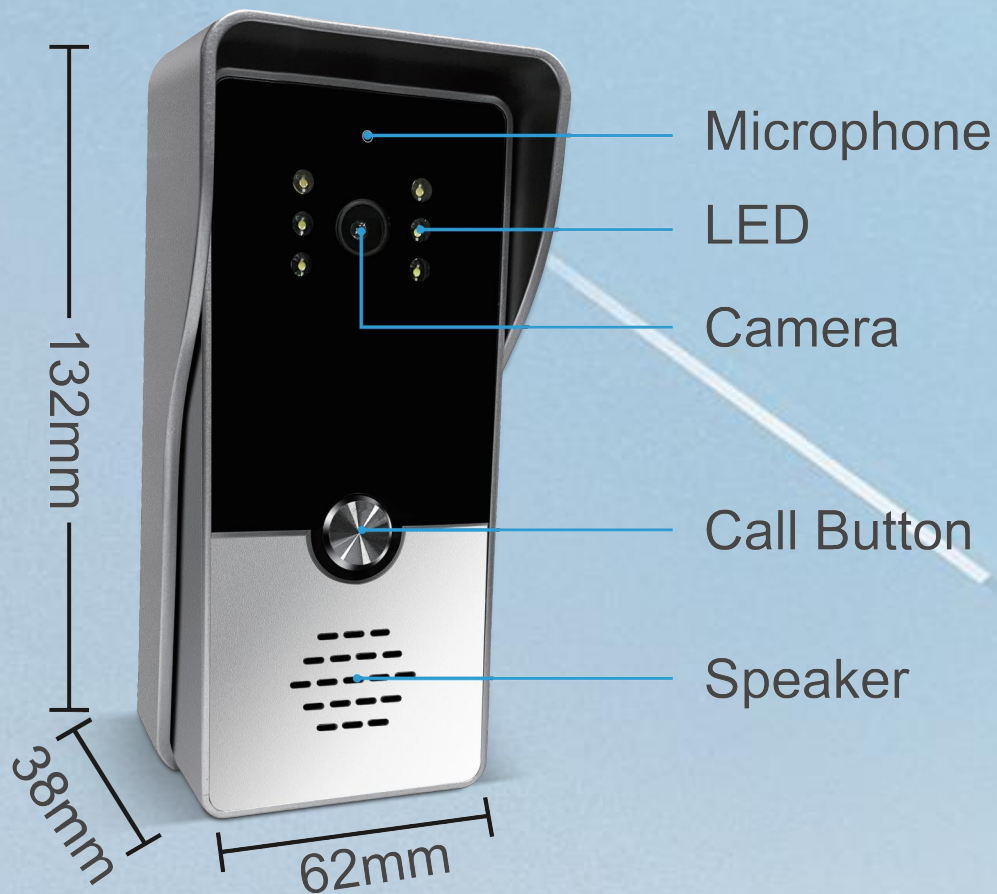

Blue: Video  
Red: Power  
Black: GND  
Yellow: Audio

Jumper

Brown: NO  
White: COM  
Screw Hole  
Green: NC

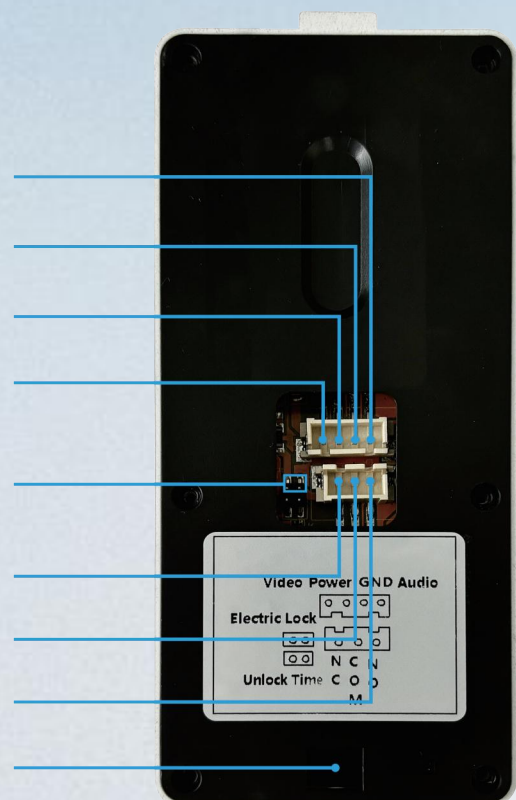



# Dual-way Call / Talk / Video Intercom and Unlock

Wall Mounted



**Day Vision**



**Night Vision**

Hello! Package Delivery

The door is open, please come in


IP Waterproof

100°





# Visitor One Button To Call

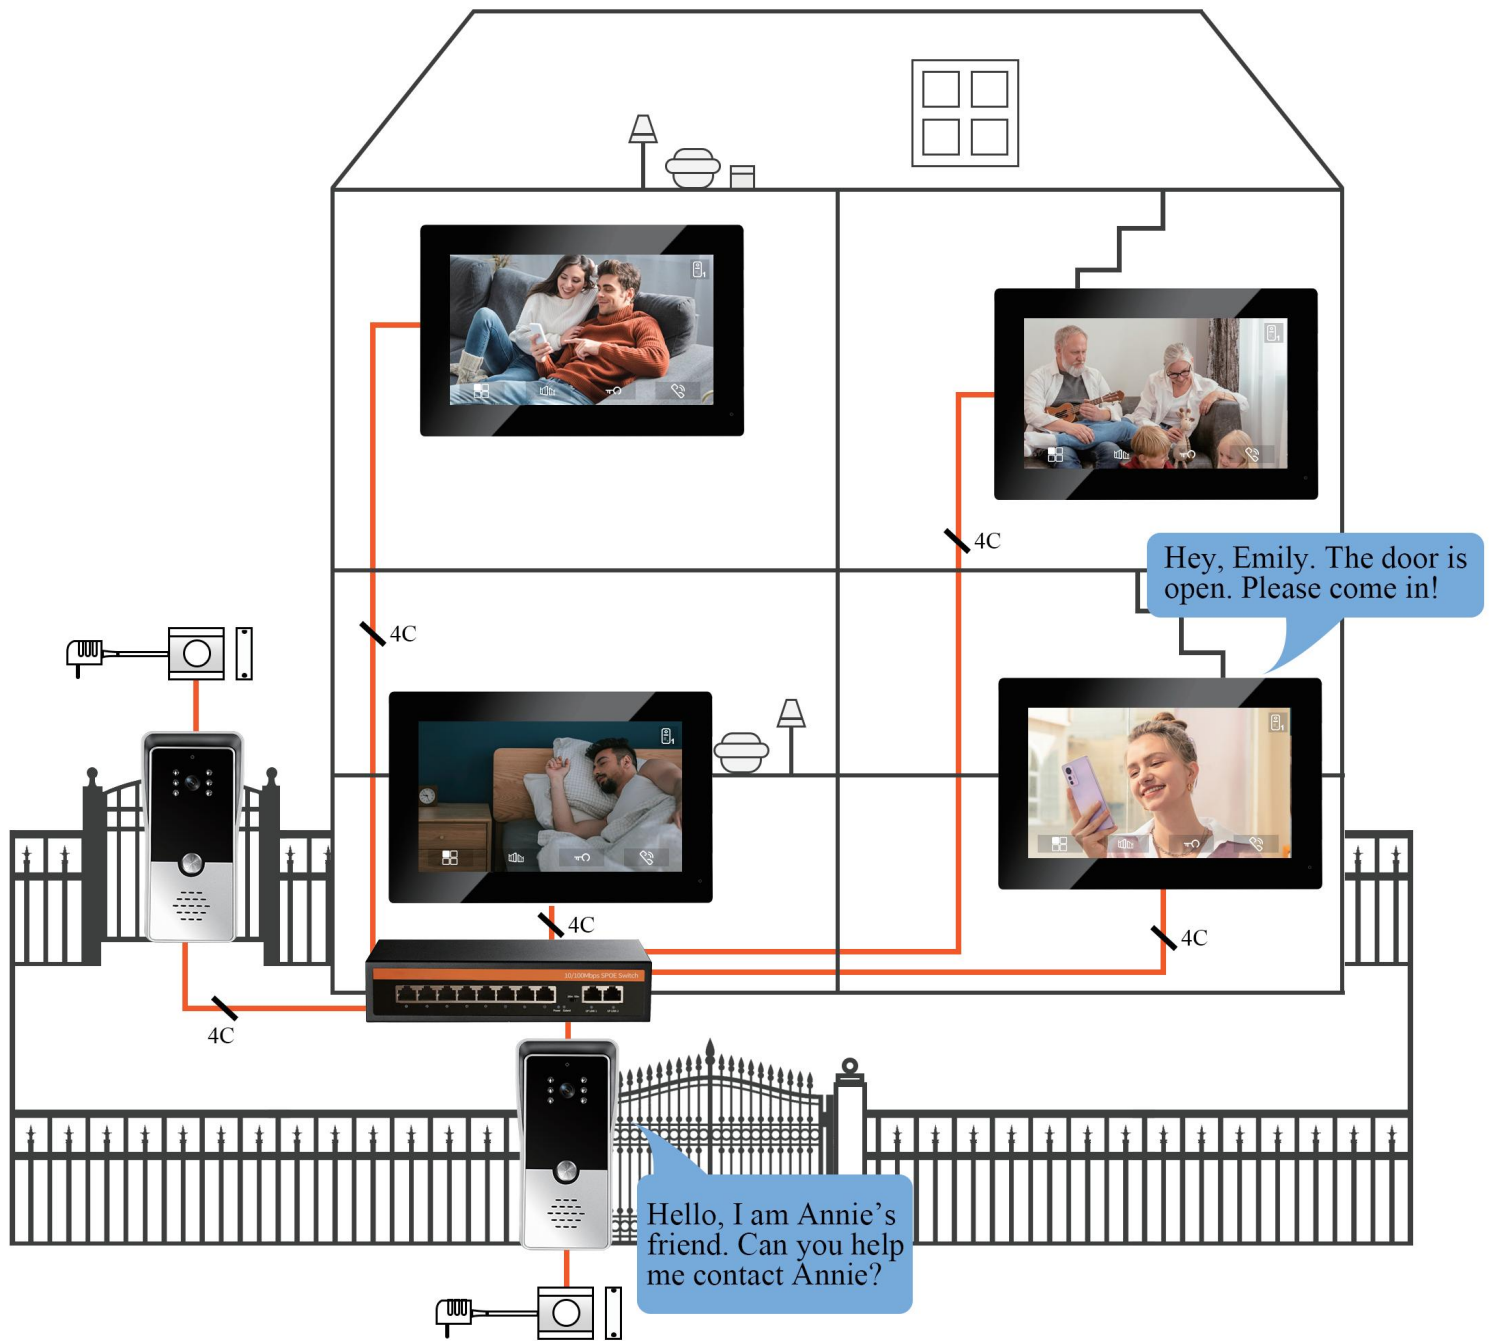

Max system: 2 call panels+ 4 indoor monitors direct series.

When visitor coming, one button to call , all indoor monitor screen will ring can see outside who is calling , talk and unlock . If one answer the call, other screens will hang up.

# IP65 Waterproof & Durable Use



IP Waterproof



Dustproof



Weatherproof




Low & High Temperature:  
-40°C~70°C





# Night Vision Camera Clear Image

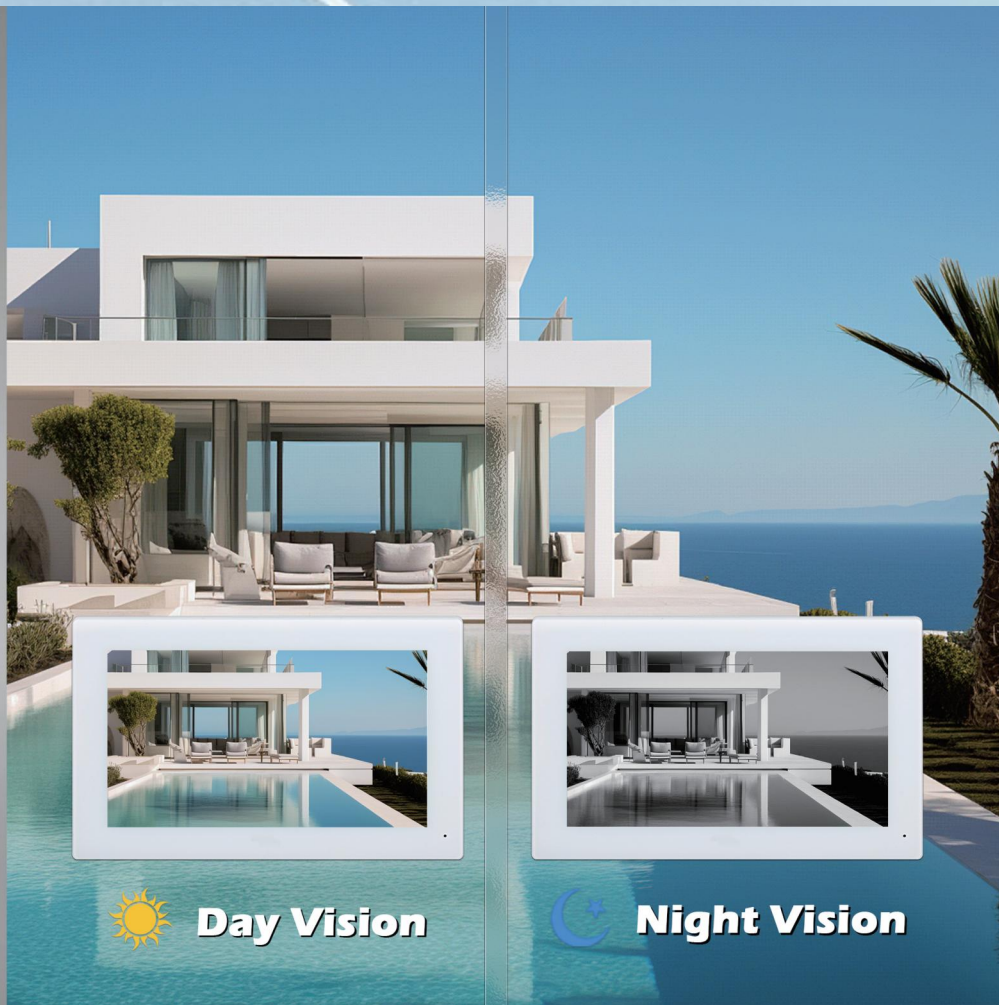

# Wide Angle , Easy To Identify





# Outdoor Station Installation



## Drilling

Drill screw holes in the location of the wall mounting plate



## Fix wall mounting plate


Fix the wall mounting plate to the wall with 2 screws



## Install outdoor station


Insert the outdoor station to the plate and fasten it with a screw.

# Indoor Monitor Installation

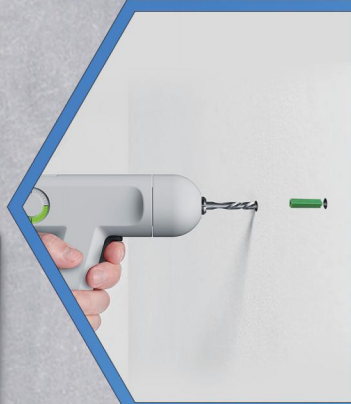

## Drilling

In the reserved hole on the wall, drill screw holes in the location of the wall mounting plate

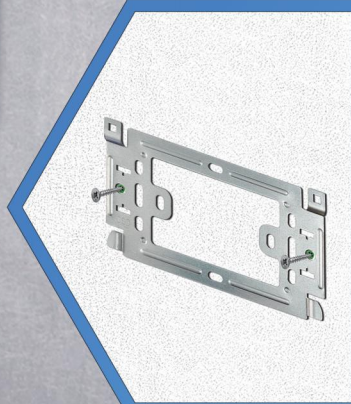

## Fix wall mounting plate

Fix the wall mounting plate to the wall with 2 screws




## Hook indoor monitor

Hook the indoor monitor to the wall mounting plate tightly




# IP System—Villa 1 to 1 Diagram

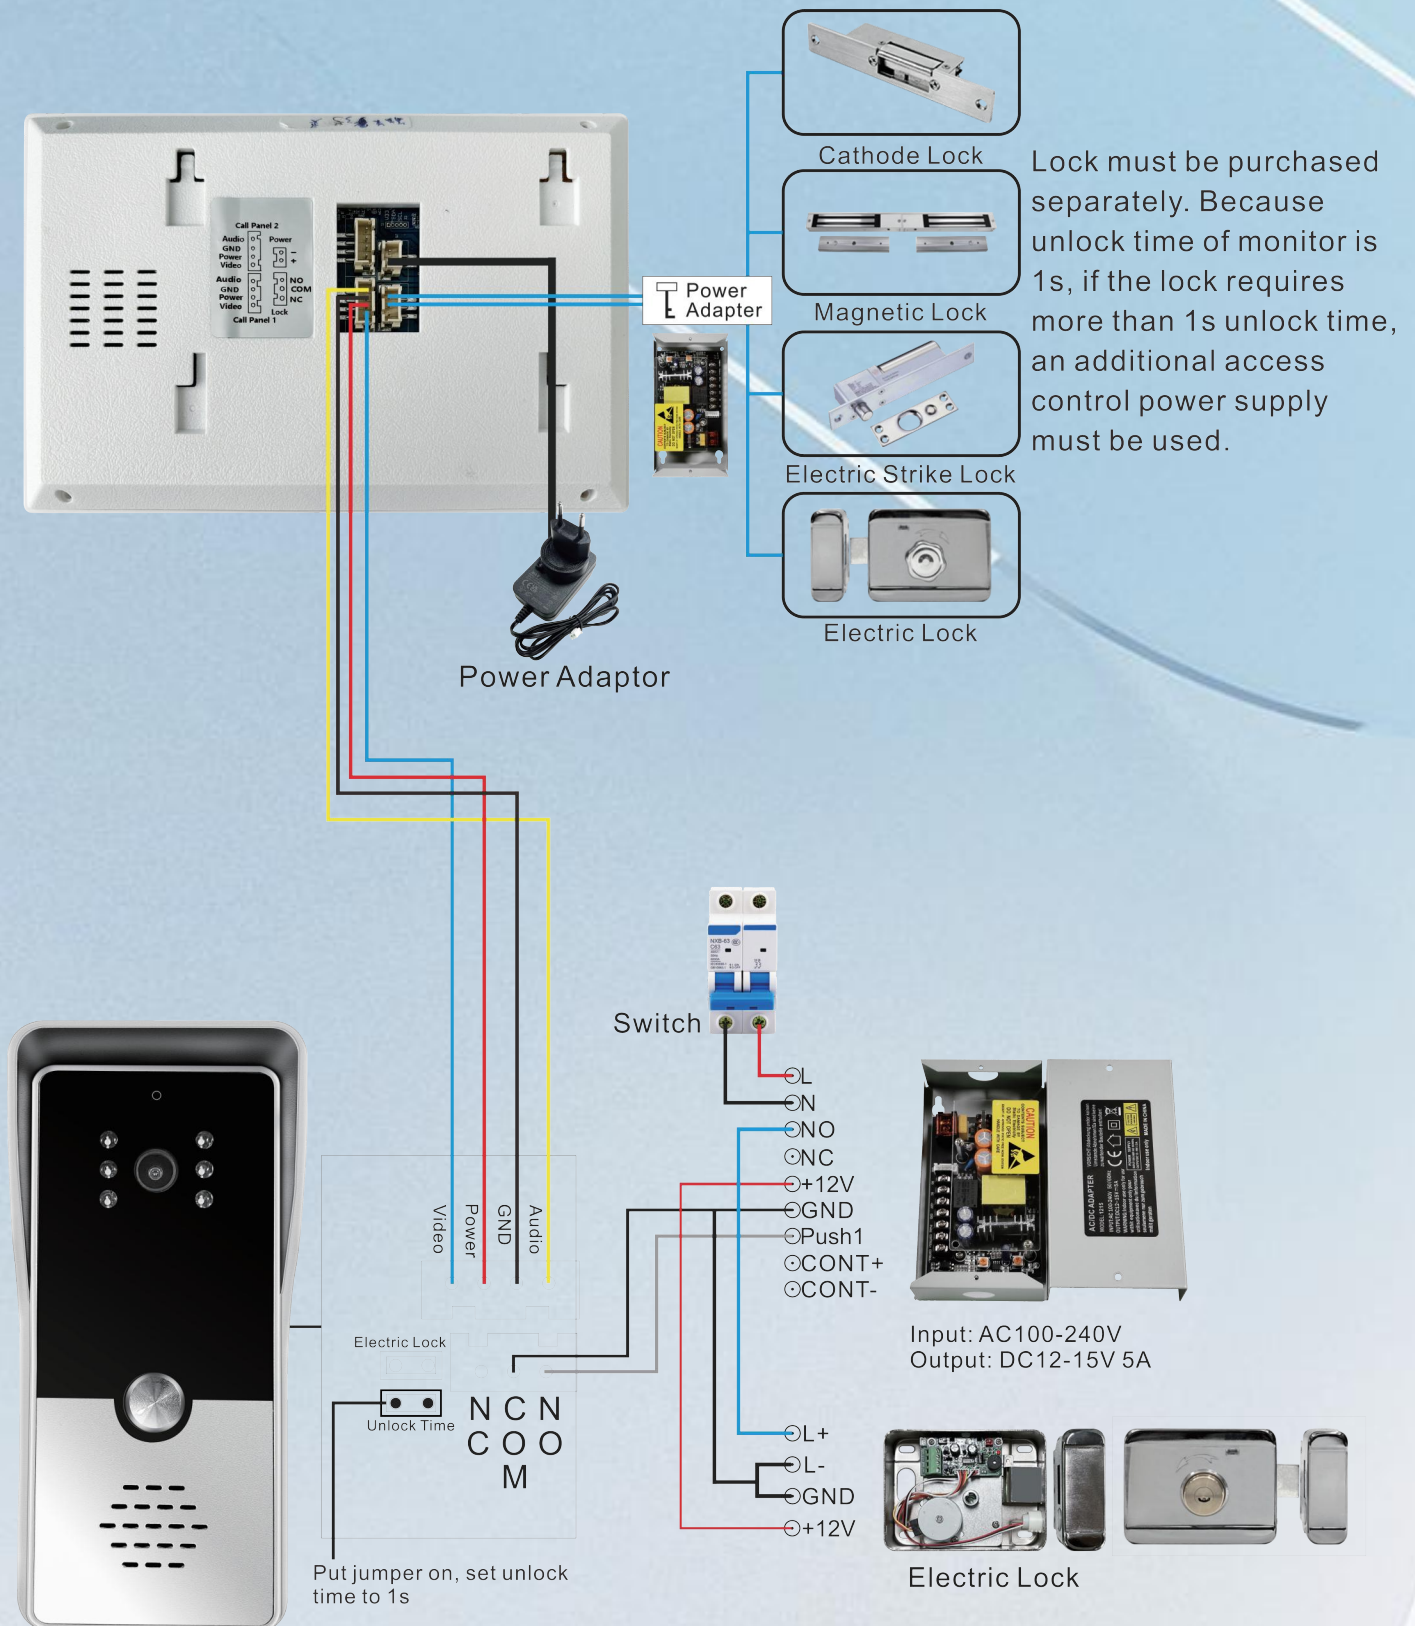


1 Ostation + 1 Indoor Monitor: Connected Directly Through Power Adapter  
Indoor Monitor Supply Power To Outdoor Station.

# IP System -Villa 1 to 4 Diagram

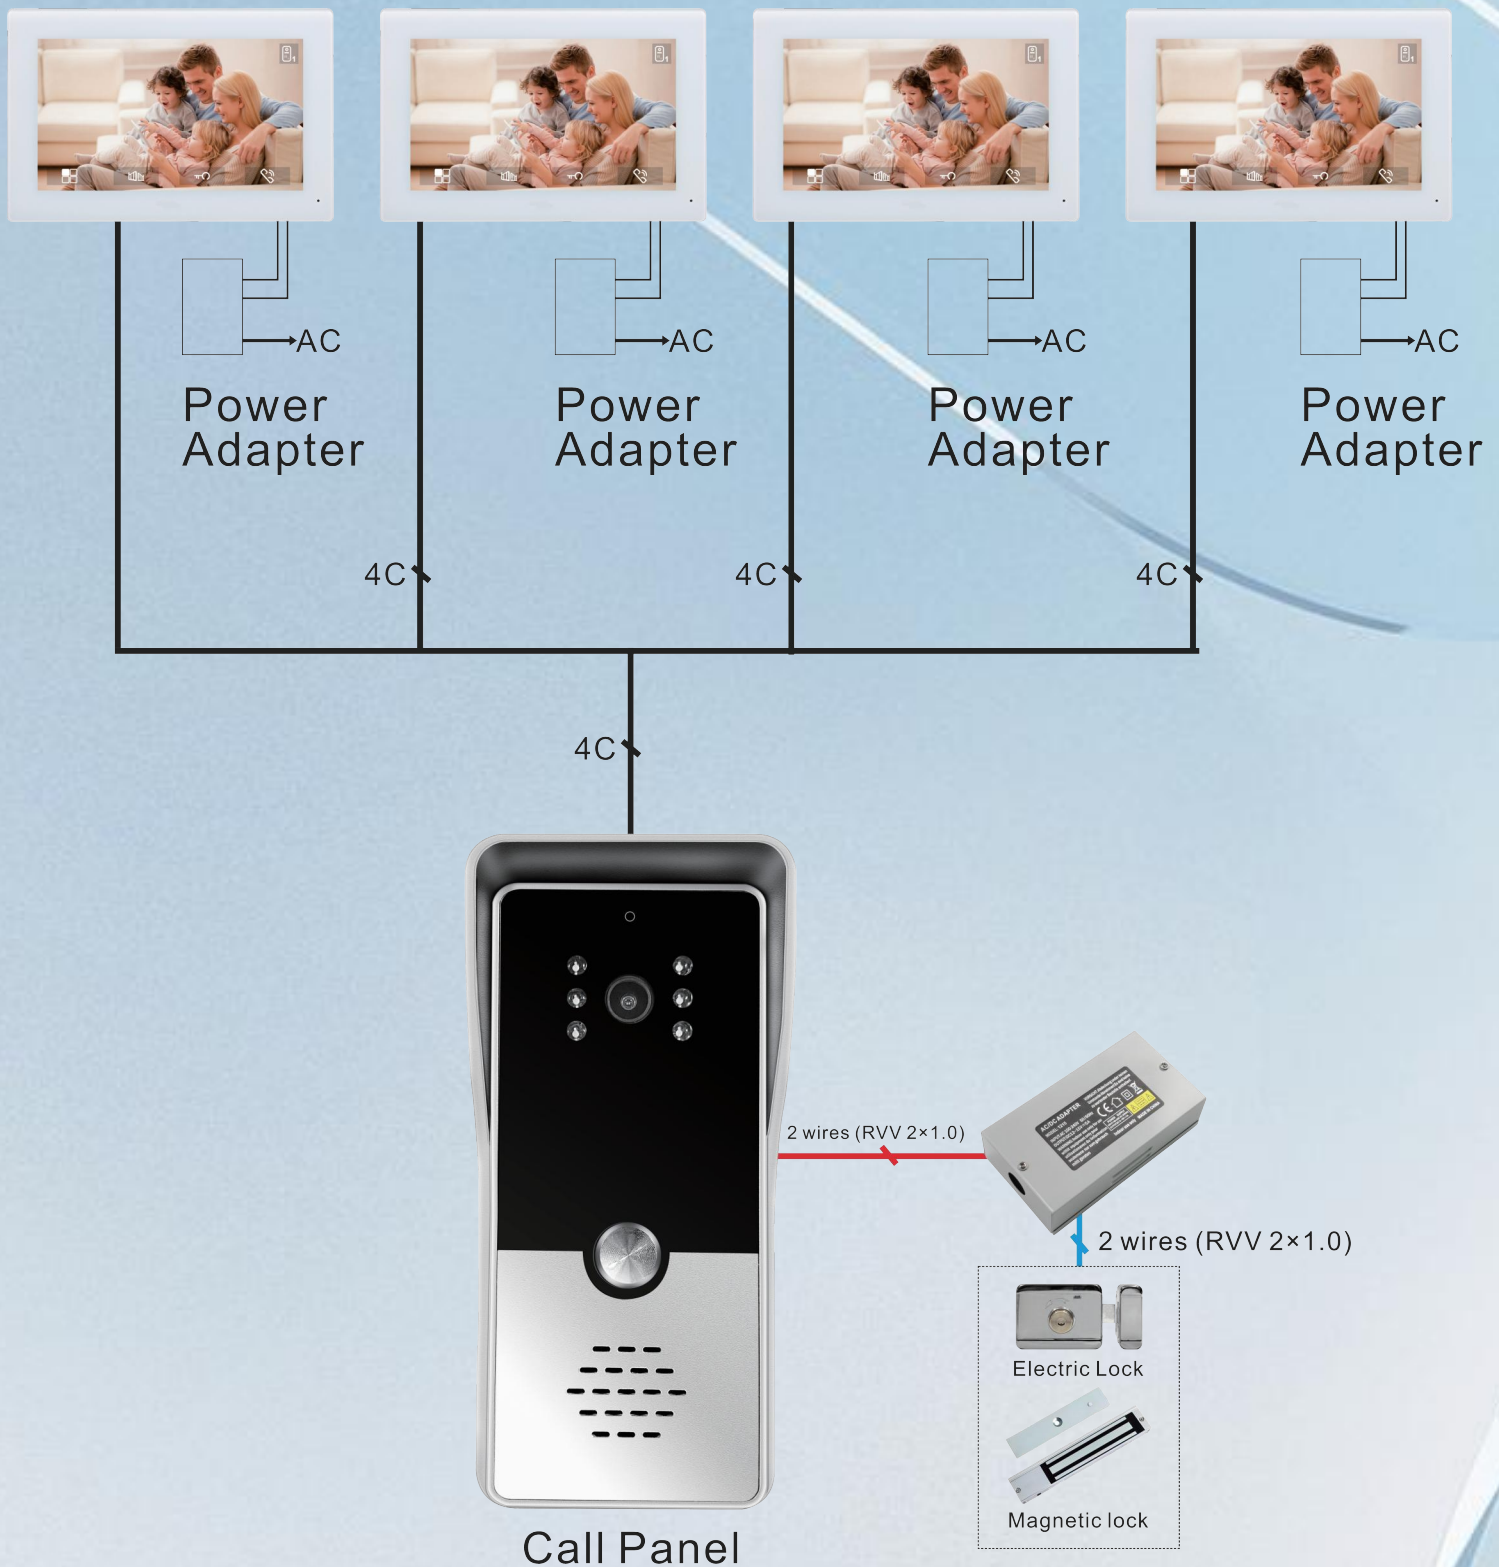



# Certification CE/FCC/RoHS, etc

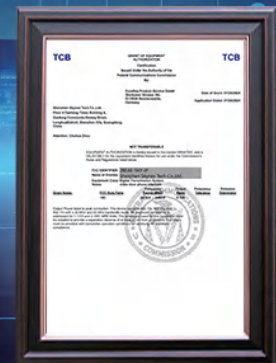

# Customize Your Logo For Free If Over 200 Pcs



## UI and Language Can Be Customized



**UI Interface**



**Multi Language**



# Specifications and Parameters

## OUTDOOR STATION

Model	LNx-P5-4W
Connection	4-wire RVV Cable connection
Camera	HD 1000TVL
Viewing Angle	100°
Night Vision	White light, 6 pcs White LEDS
Power	DC18V 1A (powered by indoor unit)
Material	ABS plastic + Acrylic Panel
Operating Temperature	-30°C~70°C
Color	Silvery+Black
Dimensions	62(L)*38(W)*132(H)mm
Installation	Wall-mounted or Embedded

## INDOOR MONITOR

Model	LNx-M72T-4W
Connection	4-wire RVV Cable connection
Display	7 inch LCD 800*480 pixel
Power	DC 18V 1A (powered by adapter)
Material	ABS plastic + Acrylic Panel+ Full Touch Screen
Operating Temperature	-20°C~55°C
Color	White/Black
Dimensions	190(L)x18(W)x122(H)mm
Installation	Wall mounted