





### 7 Inch IP Villa Kit Mobile Wifi Tuya Smartlife App Intercom







































SKY-IP-P901





Smart and Security For Your Home



### Suitable For Various Environments





### Beautiful & High Quality Package With Lifting Handle



1.Net Weight: 1.3 kg

2. Carton Size: 12 Kits / Carton

# Customize Box Package For Free If Over 600 Kits



Do What You Want

### Villa Kit Accessories









### 7 Inch IP Tuya Indoor Monitor (White+Silver)














Multi Language Touch Screen


**Snapshot** 

**Dual-way Call/Talk Monitoring** 

**Unlock 2 door** 





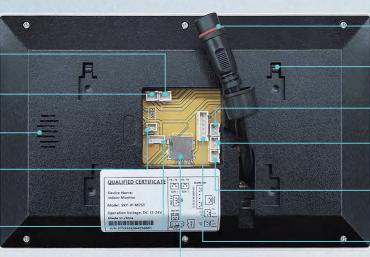

**Built-in Power Supply** 

**Bracket Slot** 

**Unpolar Input** 

Door 1 Lock/COM NO

Door 2 Lock/COM NO

12V GND S4 S3 S2 S1







### 7 Inch IP Tuya Indoor Monitor (Black+Gray)













**Multi Language** 

**Touch Screen** 


**Snapshot** 

**Dual-way Call/Talk Monitoring** 

**Unlock 2 door** 





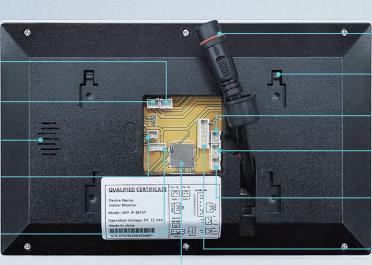

Door 1 Lock/COM NO

**Built-in Power Supply** 


**Bracket Slot** 


**Unpolar Input** 

Door 2 Lock/COM NO

12V GND S4 S3 S2 S1

#### **Outdoor Station Details**

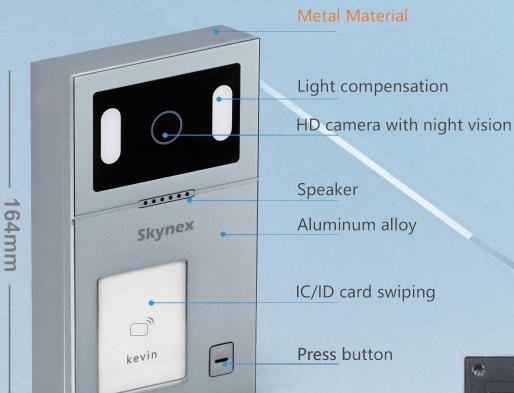

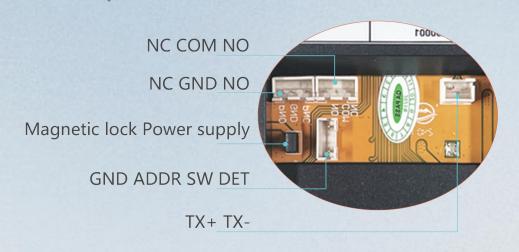

89mm








### Dual-way Call / Talk / Video **Intercom and Unlock**



### Multi Working Mode Convenient for Your Life

#### **At Home Mode**

When visitor press one button to call, indoor monitor will ring to remind resident to check who is calling and talk with him. Then click the unlock button to open the door.

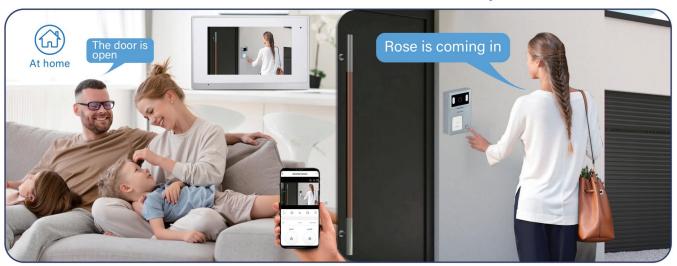


#### **Sleep Mode**

The resident can click mute button if somebody call you at night. It won't bother you if you open mute mode.






#### Visitor One Button To Call

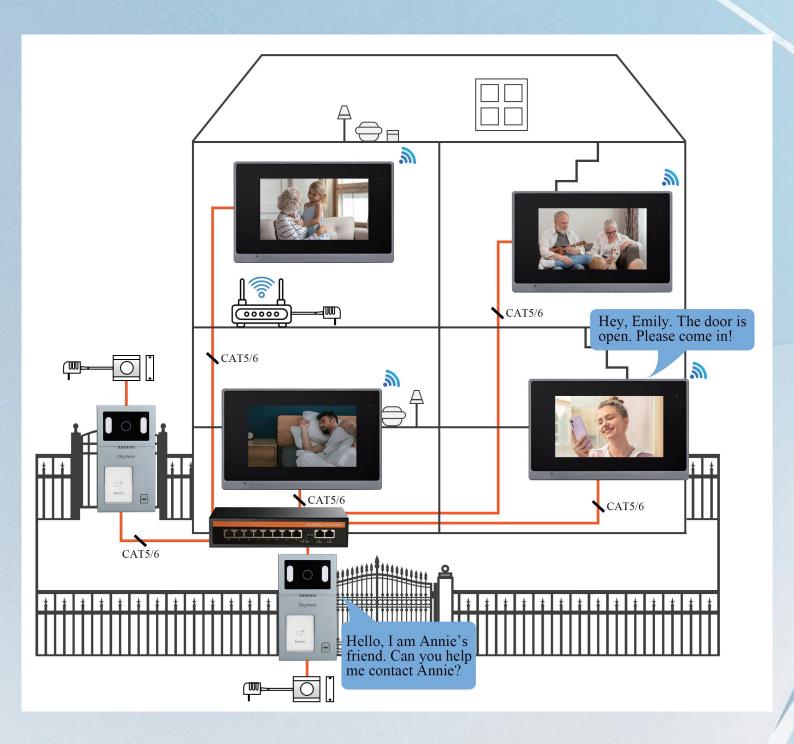

One villa can max support install 4 indoor monitors in 4 different rooms with POE without POE both is ok , When visitor coming, one button to call , all screen will ring can see outside who is calling , talk and unlock . If one answer the call, other screens will hang up.





### Room To Room Call



muiti indoor monitors can be installed in different rooms, support room to room call.

## **Multi Unlocking Methods**













# Screenshot & Photo / Video Record

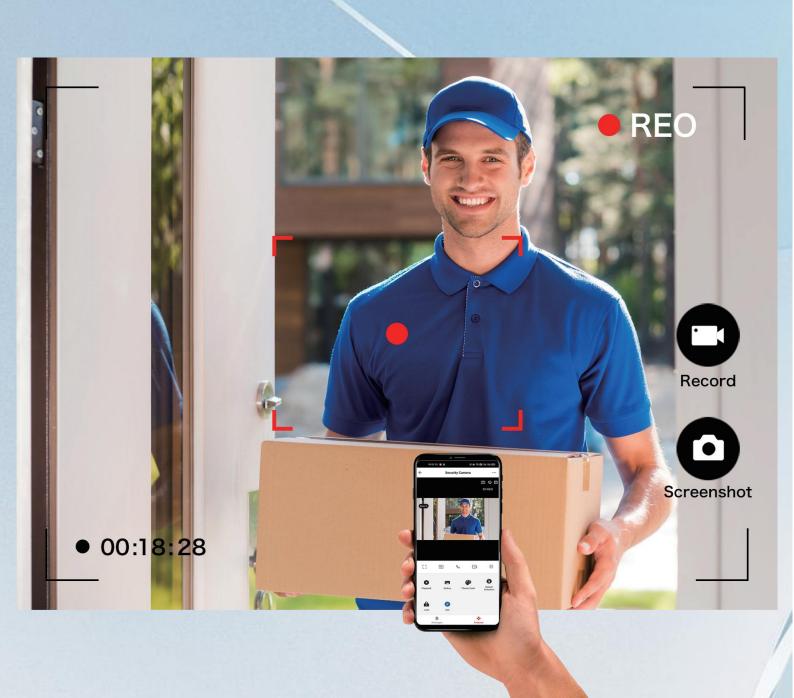

## IP65 Waterproof & Durable Use



## Night Vision Camera Clear Image

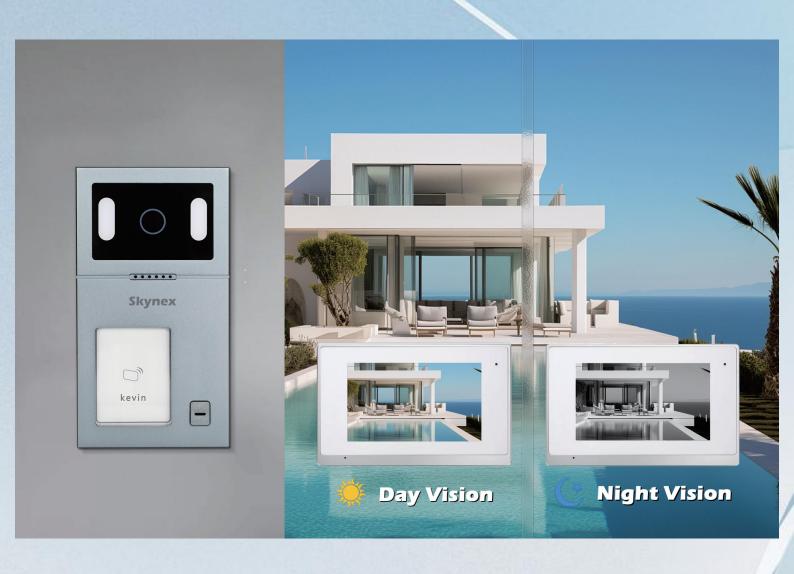

## HD 1080P, 2MP Doorbell










# Wide Angle, Easy To Identify






### Monitor Villa Outdoor Station And CCTV Camera

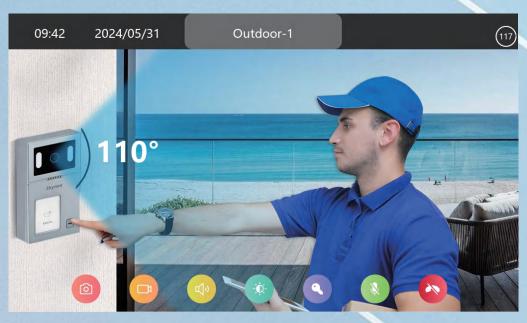






### Records

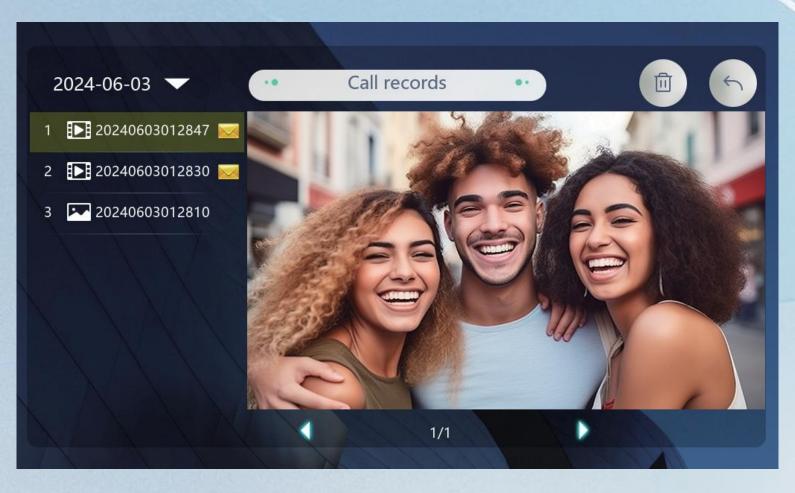






Storing Video or Photos is Related to Memory Card (Max Support 128G SD Card ))

#### **Outdoor Station Installation**




#### **Indoor Monitor Installation**

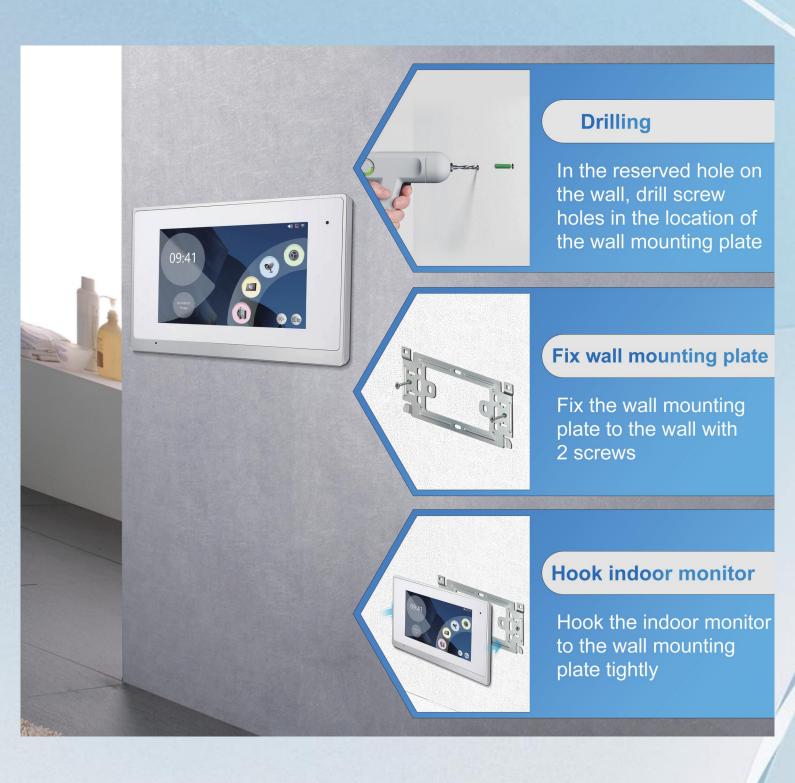



### IP System—Villa 1 to 1 Diagram

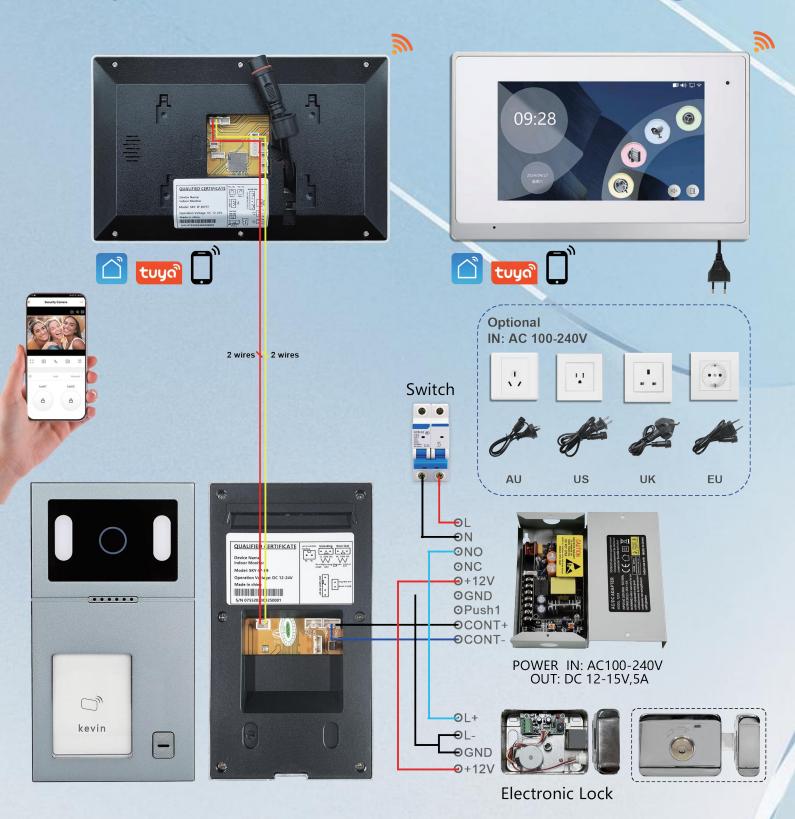

1 Ostation + 1 Indoor Monitor: Connected Directly Through Power Adapter Indoor Monitor Supply Power To Outdoor Station.




## IP System -Villa 1 to 1 Diagram



Max System: 2 call panels+ 4 indoor monitors direct series or add POE



## IP System -Villa 2 to 4 Diagram

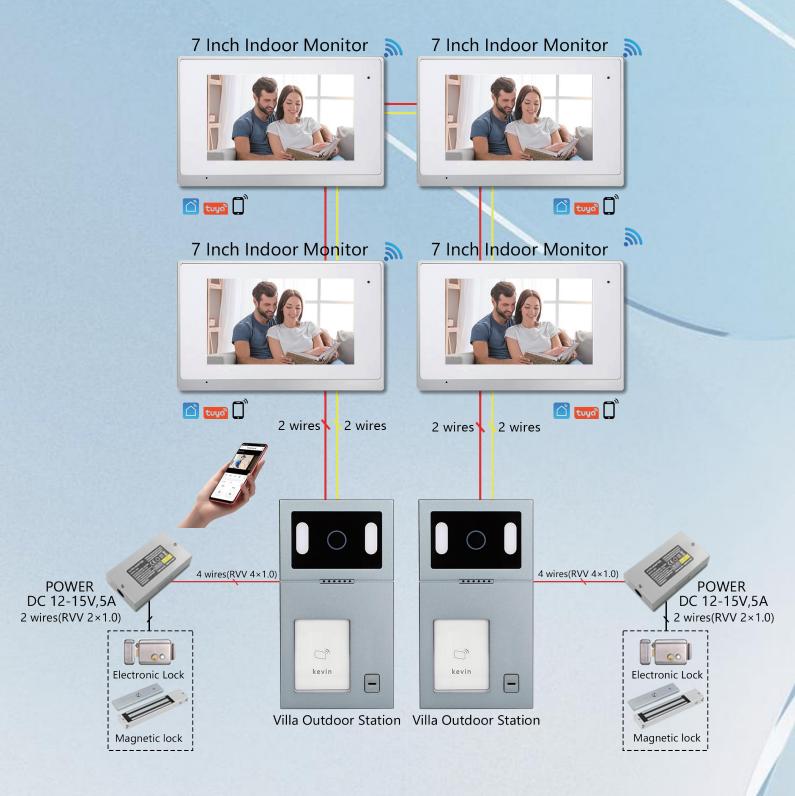

Max System: 2 call panels+ 4 indoor monitors direct series or add POE

# Certification CE/FCC/RoHS, etc



# Customize Your Logo For Free lf Over 200 Pcs



### UI and Language Can Be Customized





A文

**UI** Interface

**Multi Language** 

#### TFT LCD + Driver Board+Camera Module +Other Semi Parts SKD **Solutions for You**

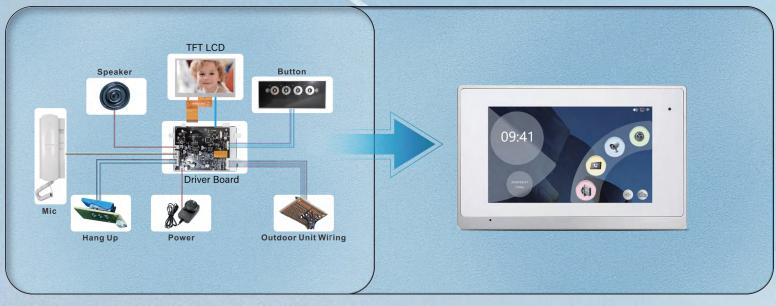

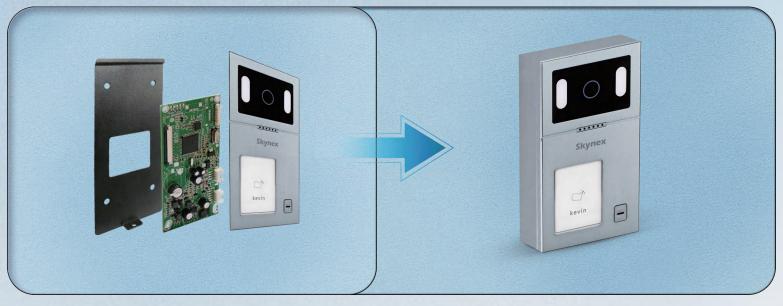

### **Specifications and Parameters**

#### **SPECIFICATIONS**

System	Linux System	Network Transmission	TCP/IP Protocol
Connection	2 wires connection	Installation	Wall Mounted
Net Weight	1.45 kg	App	Tuya, Smart Life

#### **INDOOR MONITOR**

#### **OUTDOOR STATION**

Model	IP-M75T-TUYA-2W	Model	IP-P901-2W	
Display Screen	7 inch TFT LCD	Camera Sensor	1/4 CMOS Camera Wide Angle 110°	
Resolution	1024*600 Pixels	Definition	1080P 2 Million Pixels	
Material	ABS Plastic + Acrylic Panel +Full Touchscreen	Material	Aluminum Alloy +Acrylic Panel+ Press Button	
Power	Power Adapter (DC12-24V)	Power	Non-Standard POE Switch / Power (DC12- 15V)From Monitor	
Working Voltage	DC 12-24V	Working Voltage	DC 12-15V	
Working Current	≤500mA	Working Static Current	<200mA	
Working Temperature	-10°C~+50°C	Working Dynamic Current	<250mA	
Working Humidity	10%~90%	Working Humidity	10%~90%	
Storage Temperature	-40°C~70°C	Working Temperature	-30°C~ +60°C	
Language	English / France/ Russian / Spanish / Turkish/ German/ Dutch,etc.	Maximum Power Consumption	< 5W	
Color	White+Silver/Black+Gray	Color	White+Silver	
Dimensions	230(W)*145(H)*26(D) mm	Dimensions	165(H)*90(W)*28(D)mm	
Installation	Wall mounted	Installation	Wall-mounted or Embedded	

#### **Unboxing Video**

https://youtu.be/NTq5pjtOiys



No.	Malfunction	Reason	Solution
1	Outdoor station can't call indoor monitor?	1.Indoor Monitor got reset 2.Network cable quality or different standard	"1.In ""Sys Set""-""Address"",set address as ""010101010101 2.Use a 568B standard and good quality network cable"
2	"Before installation , it was working well. But after installation, it can not be called?"	1.Network cable quality 2.Insufficient power supply voltage	"1.Use a good quality network cable 2.Use a power adapter with output DC18V-24V,if the network cable is over 40 meters"
3	"When visitor was calling, only one monitor is working"	1.Address is the same	"1.For example, the address of one monitor is ""01010101010"", and the address of another should be ""0101 01010102"". If there are more screens, then the address should be ""0101010 10103"", ""010101010104"" and so on."
4	Why can't open the lock?	"1.Don't use a power supply controller 2. Connect the wrong wire"	"1.Use a power supply controller to power and control the lock 2. Please get and check the wiring diagram or video from technical support"