



tuya



7 Inch IP Villa Kit Mobile Wifi Tuya Smartlife App Intercom



WiFi Tuya/
Smart Life



Touch Screen



Monitoring



110° Wide Angle



Snapshot



Night Vision

1080P
HD Camera

2MP



Support Max
128G
Memory Card



Multi Language



Call Monitor



Dual-way
Call/Talk



Open 2 Locks



IP Waterproof



One Button
to Call



SKY-IP-M75T




SKY-IP-P901



Smart and Security For Your Home

Suitable For Various Environments

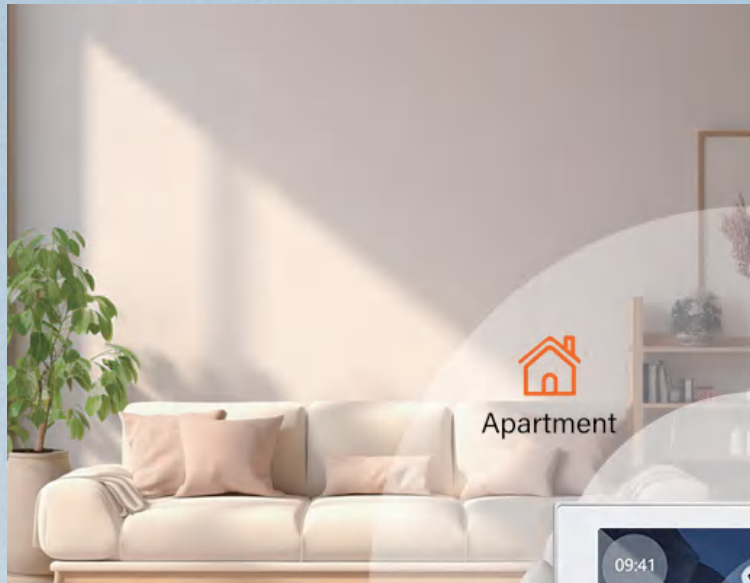


Beautiful & High Quality Package With Lifting Handle




1. Net Weight: 1.45 kg
2. Carton Size: 10 Kits / Carton

Customize Box Package For Free If Over 600 Kits

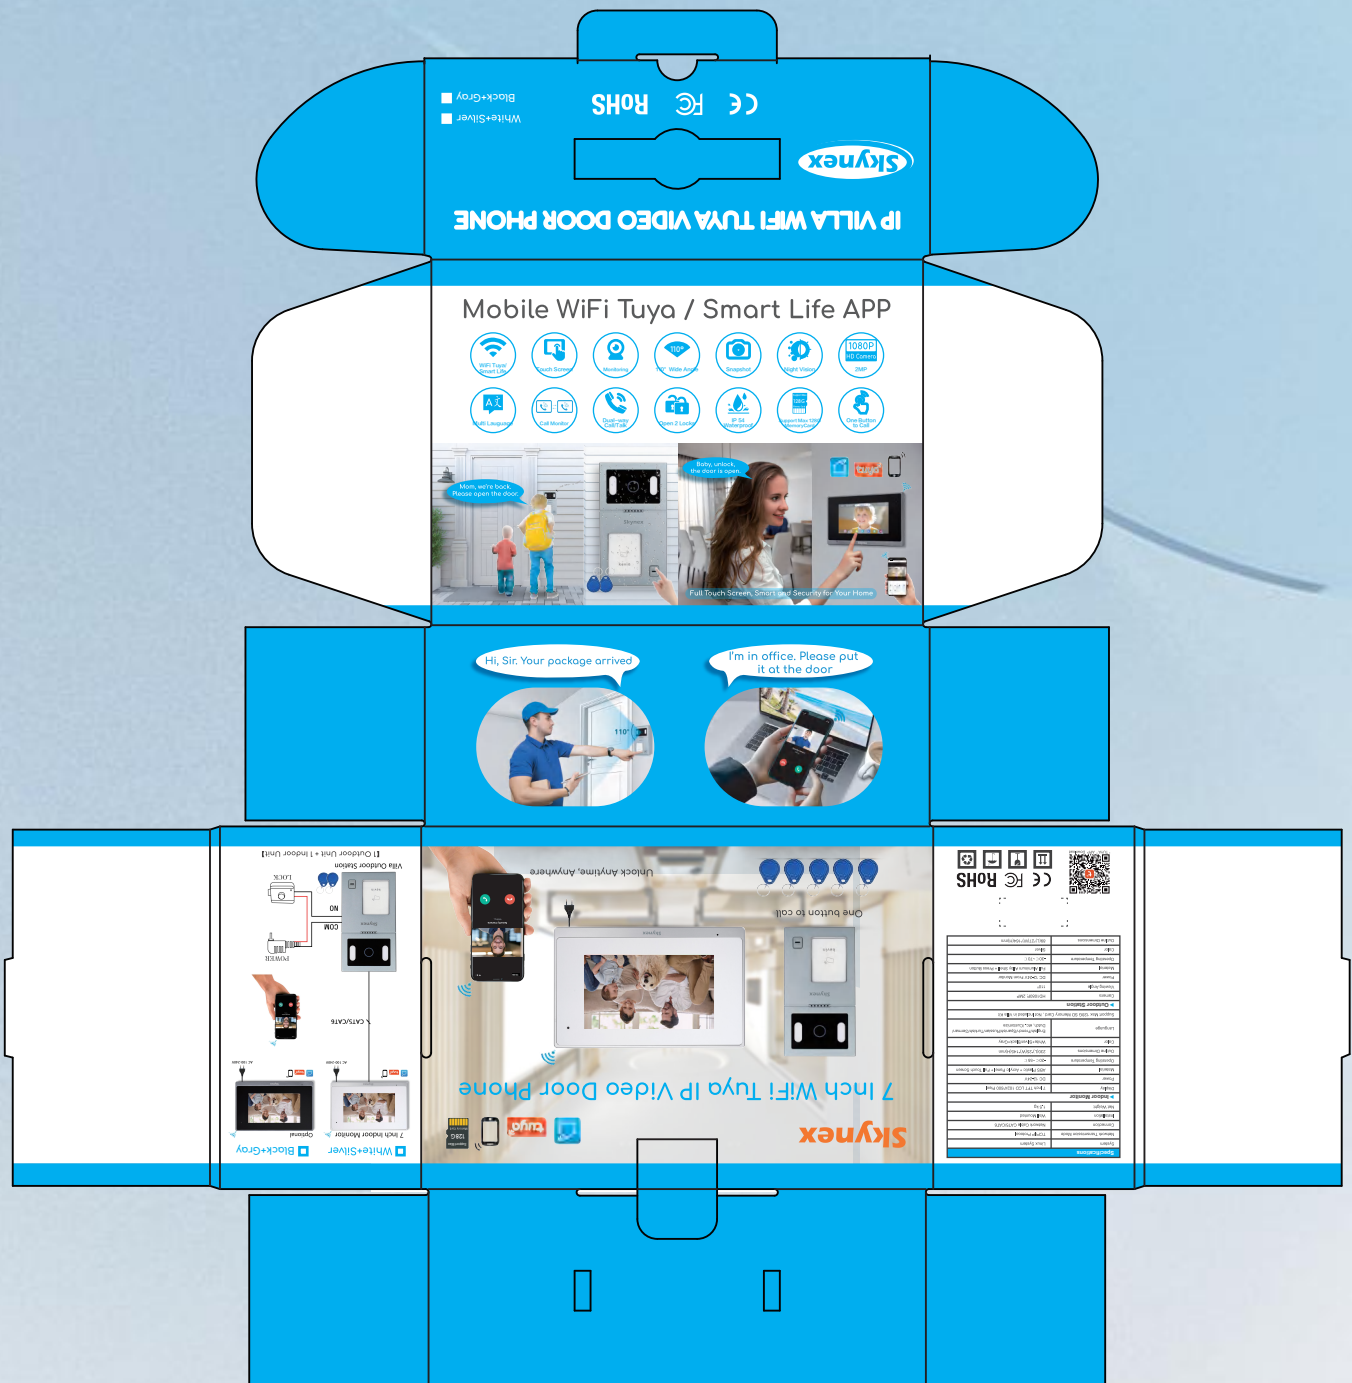

Do What You Want

Villa Kit Accessories



User Manual

7 Inch IP Tuya Indoor Monitor (White+Silver)



Multi Language



Touch Screen



Snapshot



Dual-way Call/Talk



Monitoring



Unlock 2 door



230mm

145mm

18mm

Debug Software:
GND TX RX VCC


Unpolar Input

Connect Detector:
12V GND S4 S3 S2 S1

SD Card
Speaker

Door 1 Lock/COM NO

Door 1 Lock/COM NC

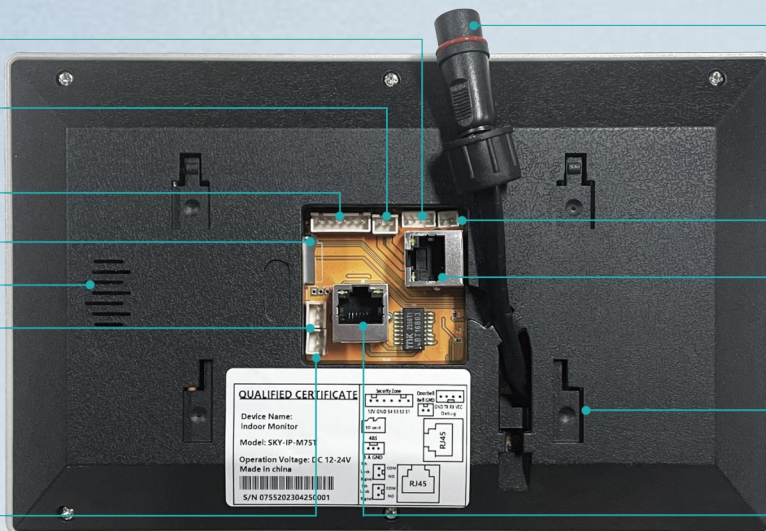


Built-in Power Supply

Bell GND:
Connect Doorbell

Door 1/RJ45

Bracket Slot

Door 2/RJ45





tuya



7 Inch IP Tuya Indoor Monitor (Black+Gray)



Multi Language



Touch Screen



Snapshot



Dual-way Call/Talk



Monitoring



Unlock 2 door



230mm

145mm



18mm

Debug Software:
GND TX RX VCC

Unpolar Input

Connect Detector:
12V GND S4 S3 S2 S1

SD Card
Speaker

Door 1 Lock/COM NO

Door 1 Lock/COM NC


Built-in Power Supply

Bell GND:
Connect Doorbell



Door 1/RJ45

Bracket Slot

Door 2/RJ45

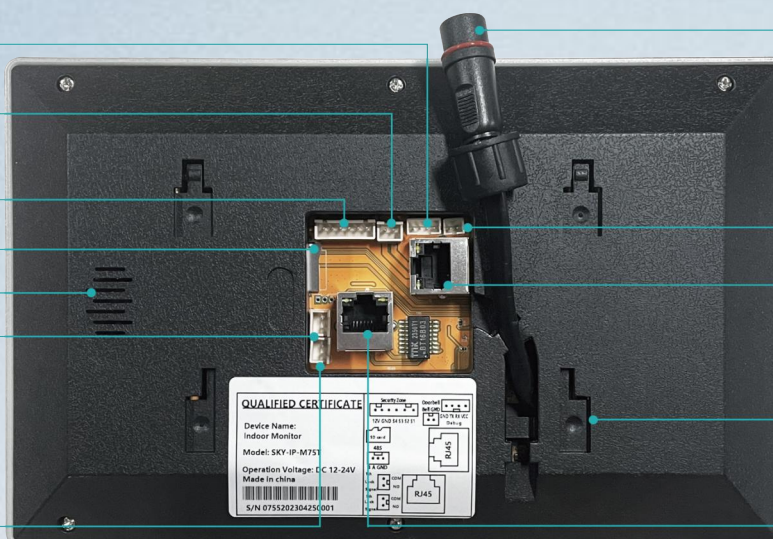

Outdoor Station Details

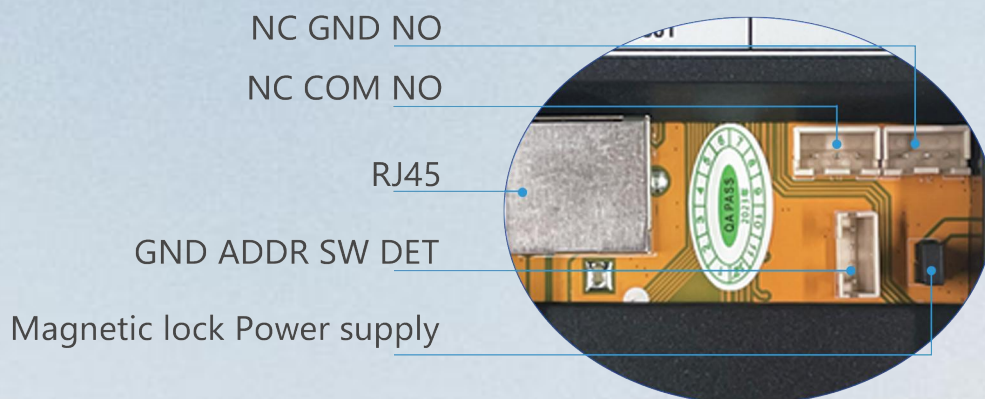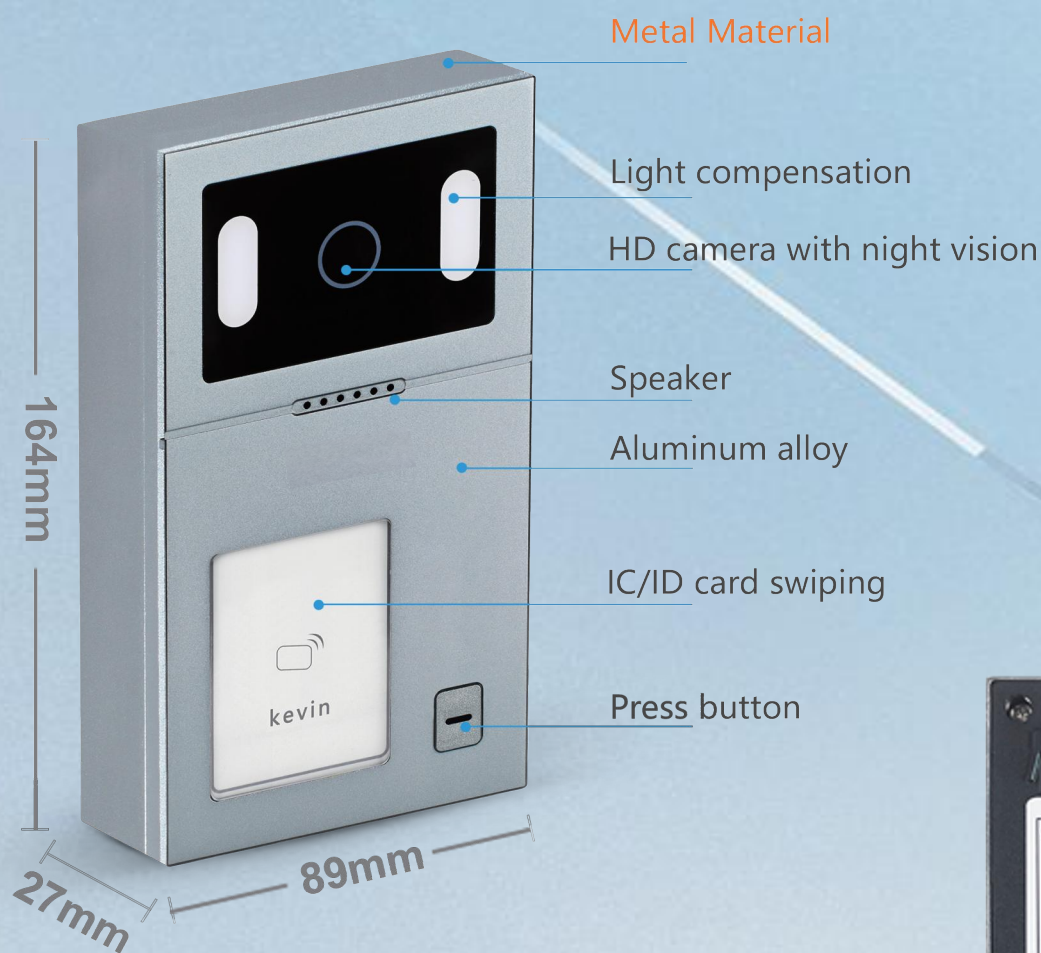

Dual-way Call / Talk / Video Intercom and Unlock

Wall Mounted



Day Vision




Night Vision

The door is open, please come in

IP Waterproof




Hello! Package Delivery



Multi Working Mode Convenient for Your Life


At Home Mode

When visitor press one button to call, indoor monitor will ring to remind resident to check who is calling and talk with him. Then click the unlock button to open the door.

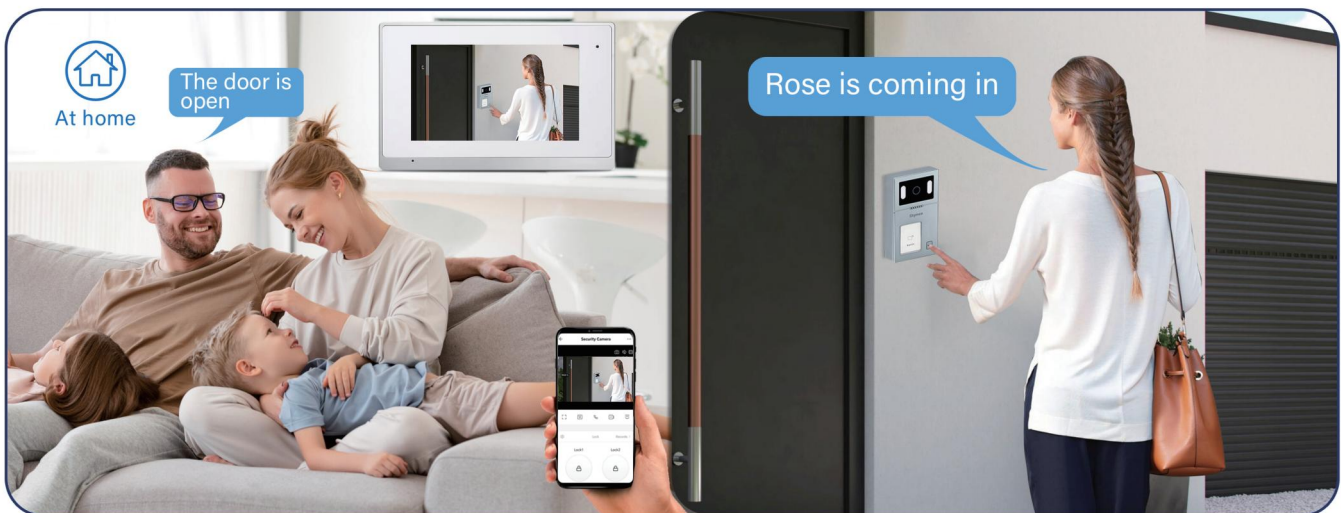


Sleep Mode

The resident can click mute button if somebody call you at night. It won't bother you if you open mute mode.

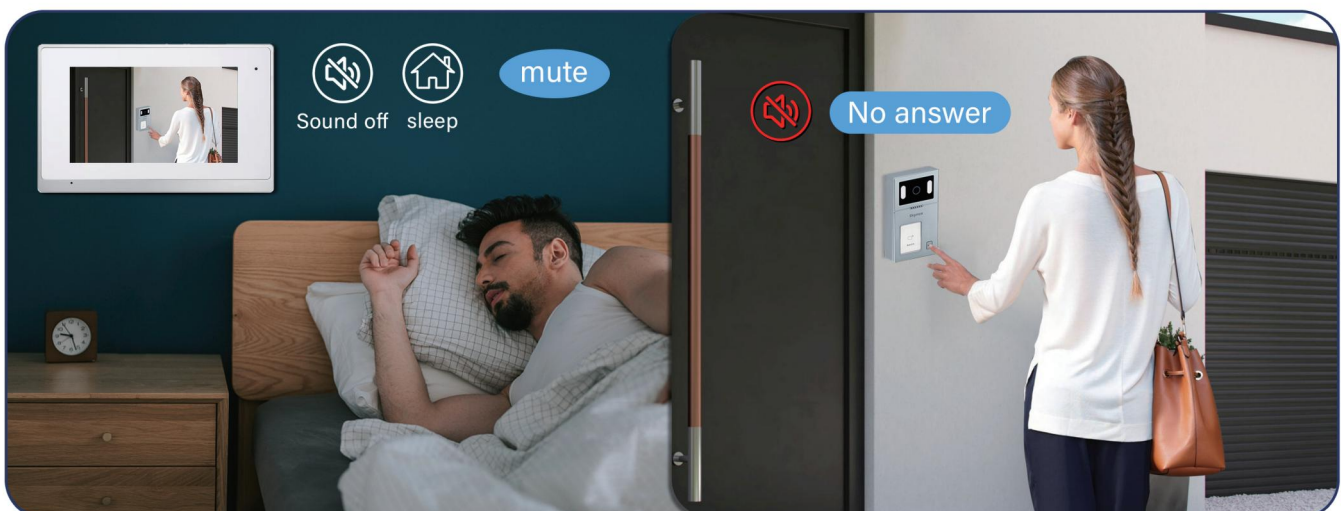

Visitor One Button To Call

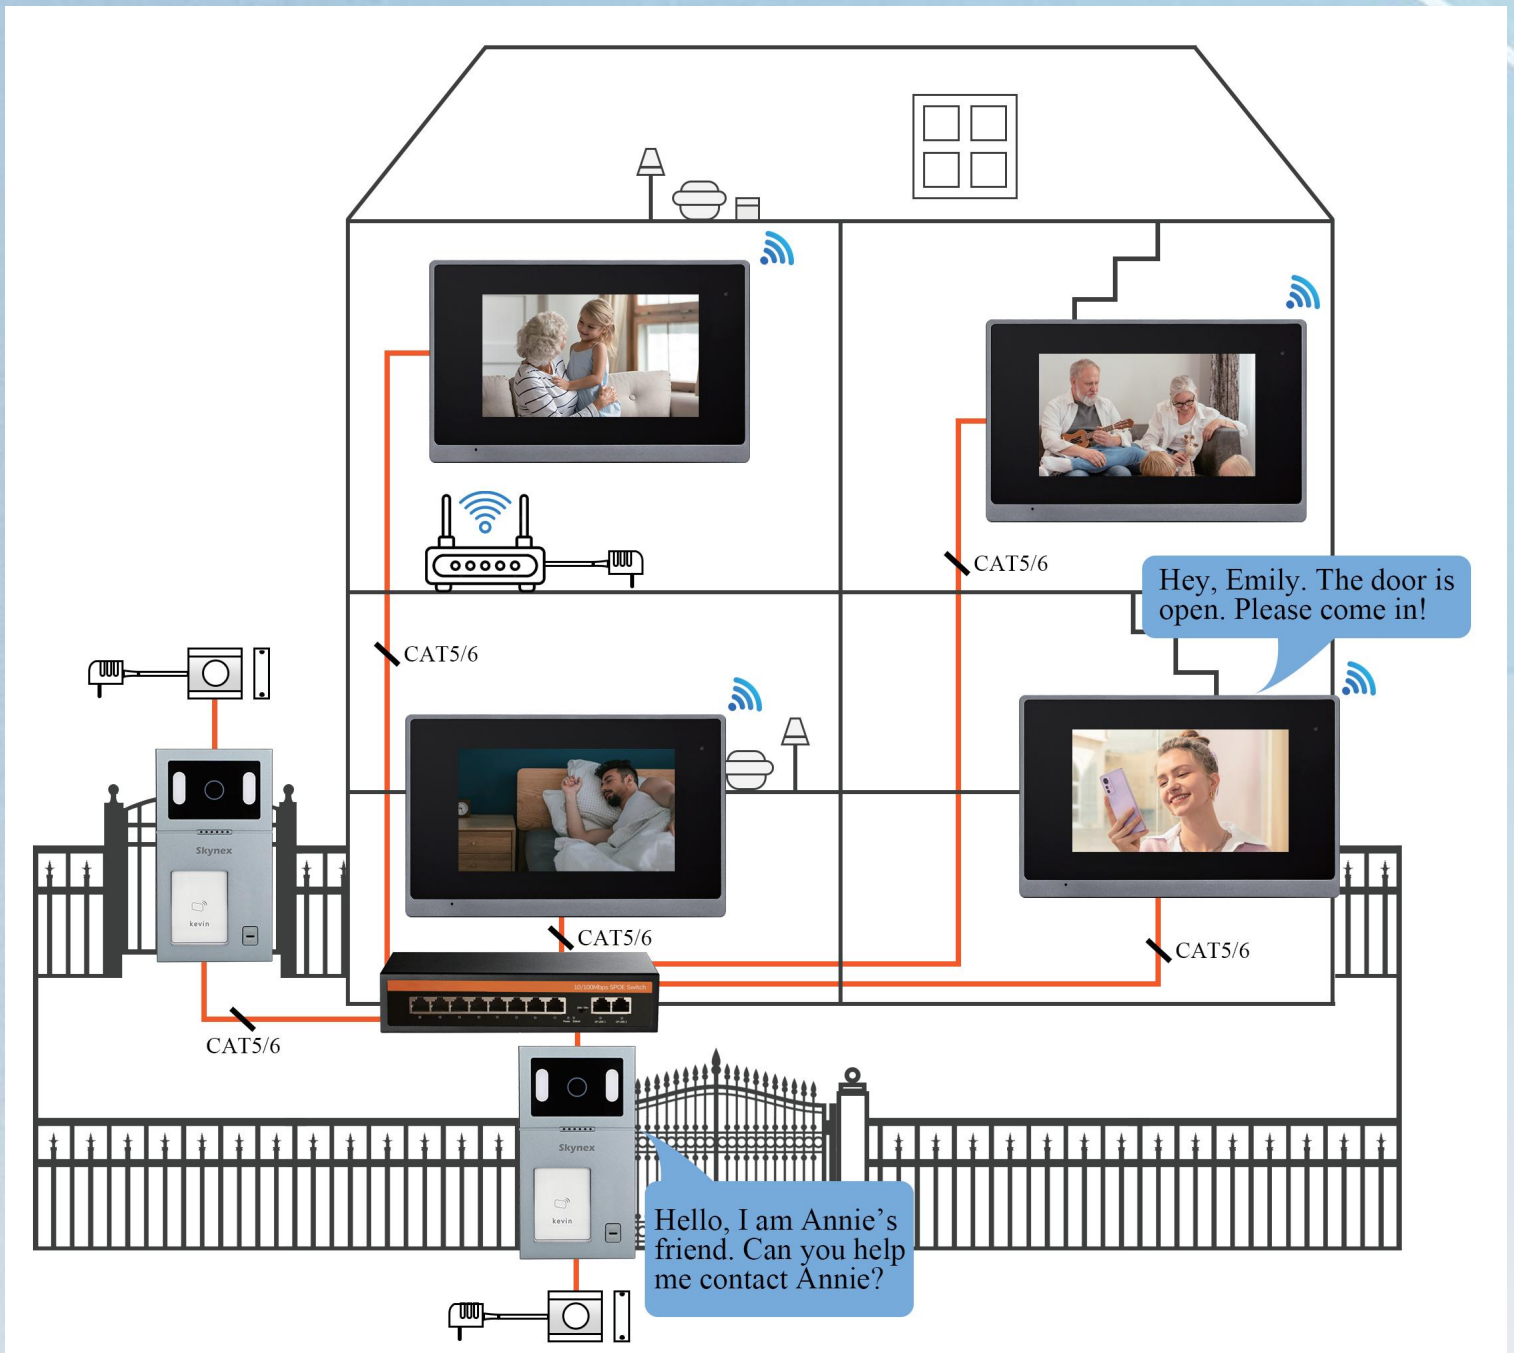

One villa can max support install 4 indoor monitors in 4 different rooms with POE without POE both is ok , When visitor coming, one button to call , all screen will ring can see outside who is calling , talk and unlock . If one answer the call, other screens will hang up.

Room To Room Call




multi indoor monitors can be installed in different rooms , support room to room call.

Multi Unlocking Methods




Indoor Monitor Unlock



Remote to Unlock




Scan Card unlock

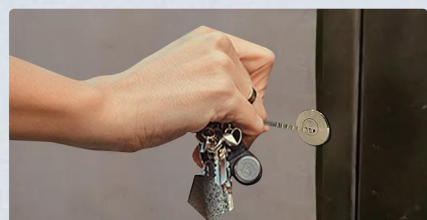

Key to Unlock

Screenshot & Photo / Video Record

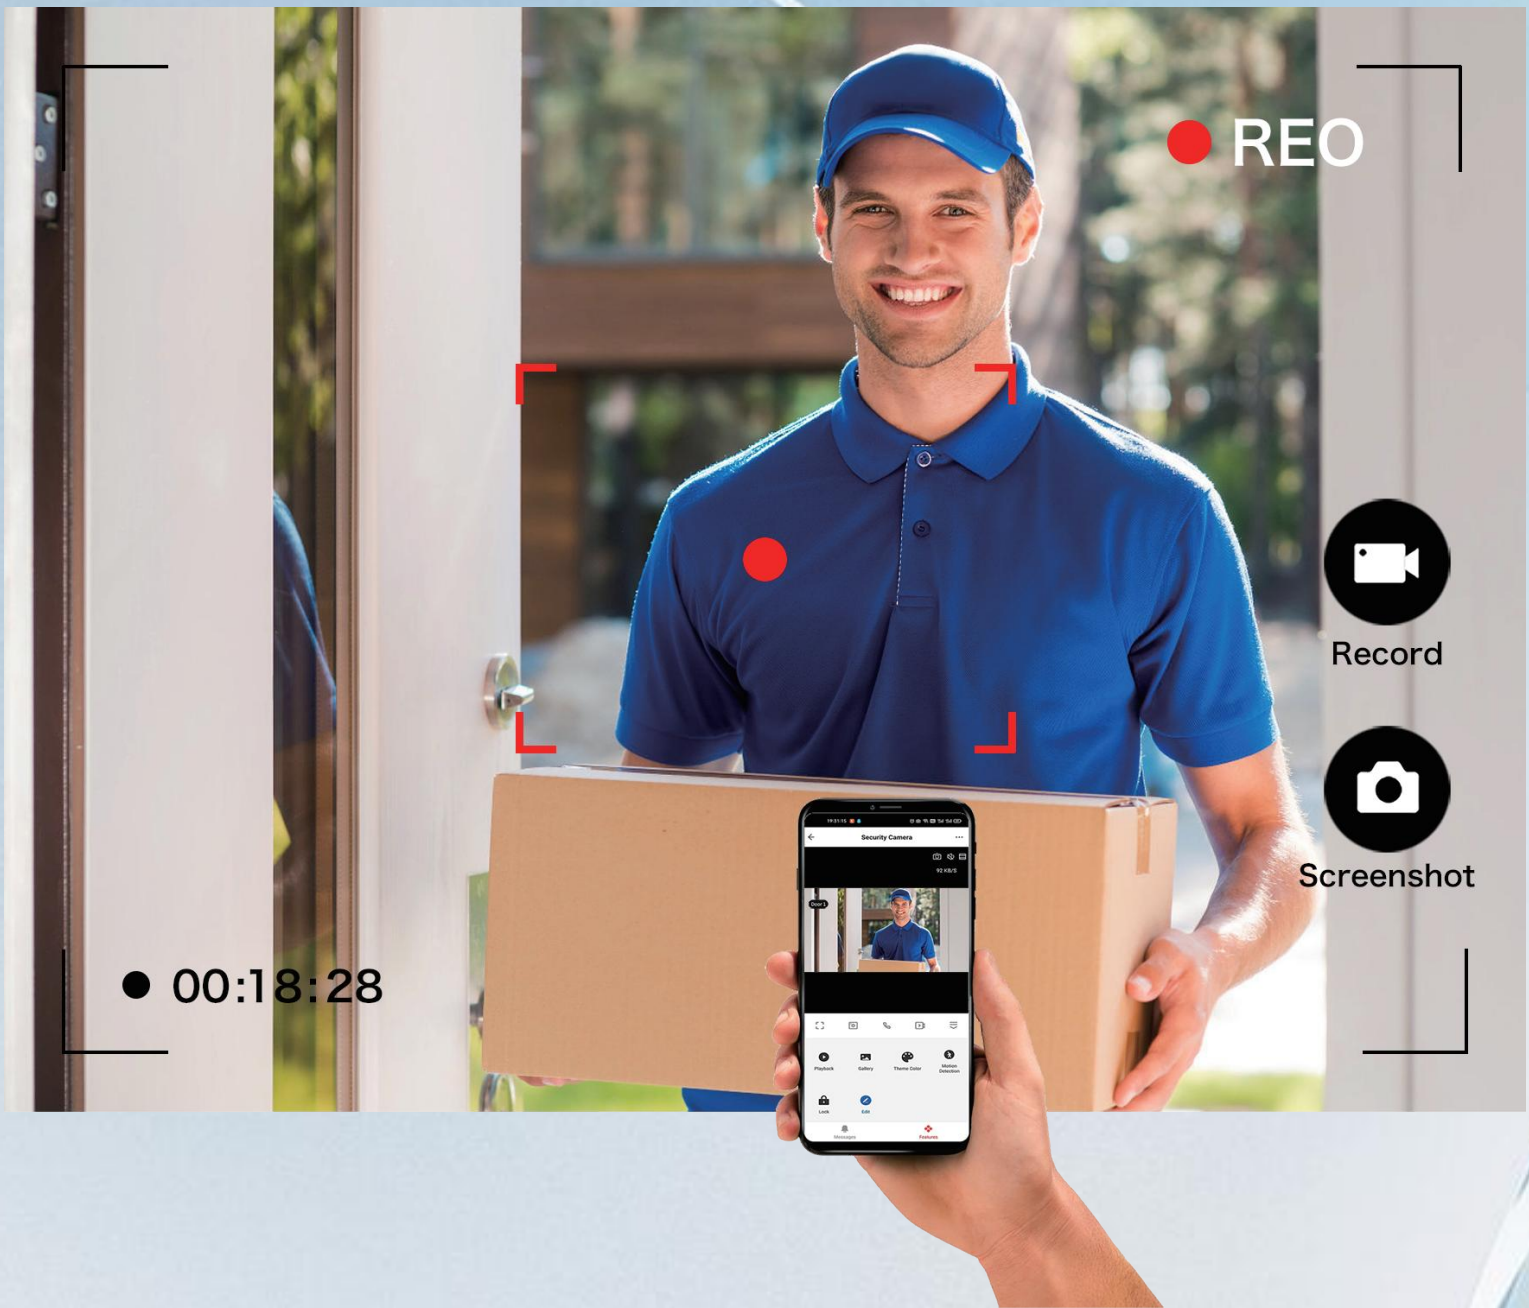

IP65 Waterproof & Durable Use



IP waterproof



Dustproof




Weatherproof



Low & High Temperature:
-40°C~70°C



Night Vision Camera Clear Image

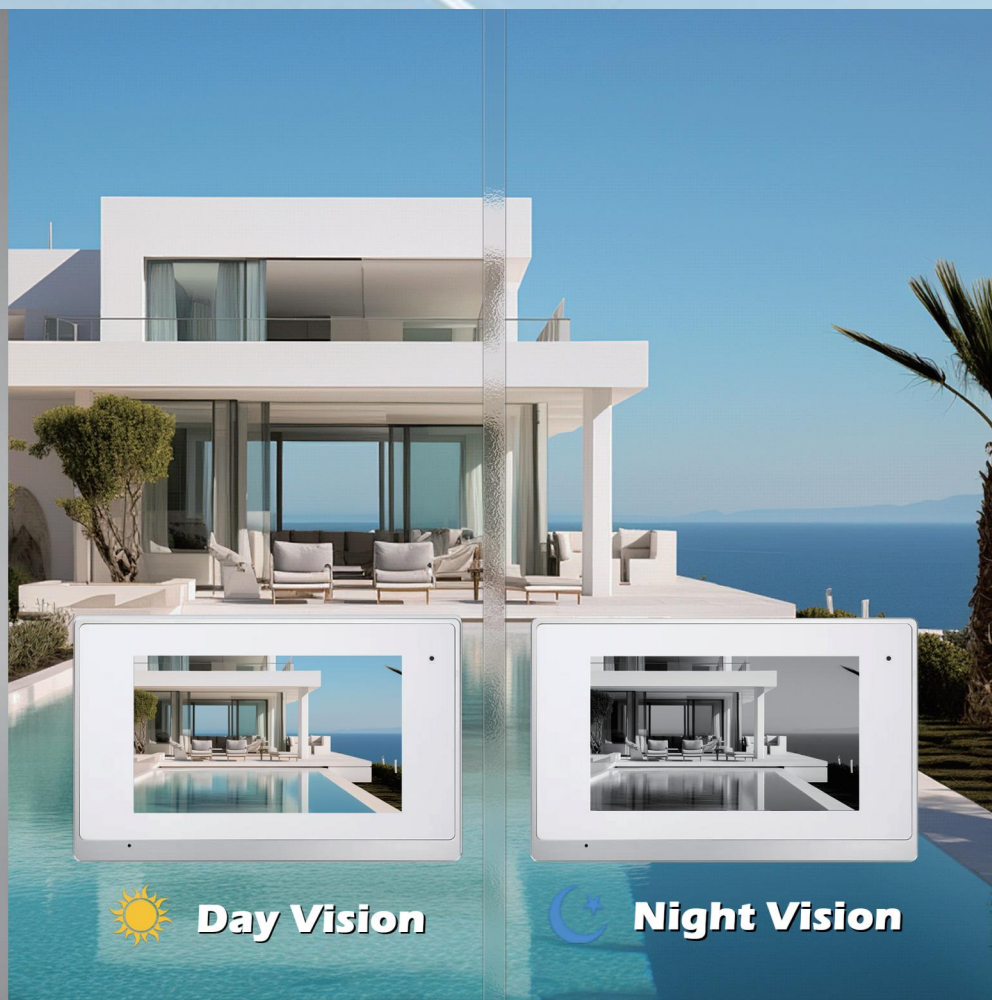


HD 1080P , 2MP Doorbell



1080P



1200TVL

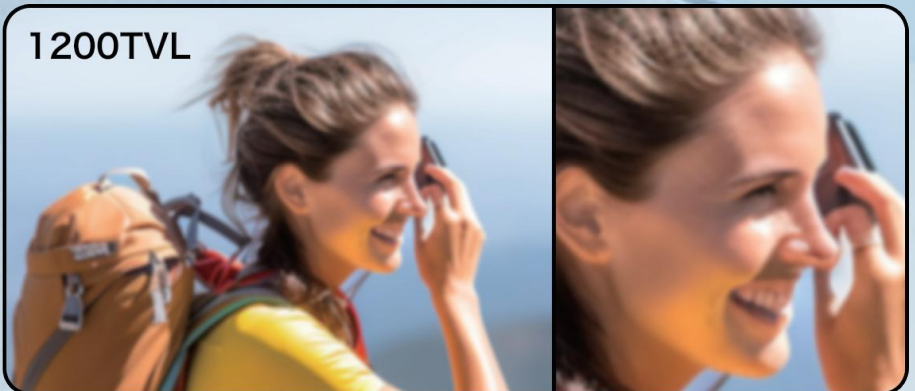


800TVL



Wide Angle , Easy To Identify



Monitor Villa Outdoor Station And CCTV Camera

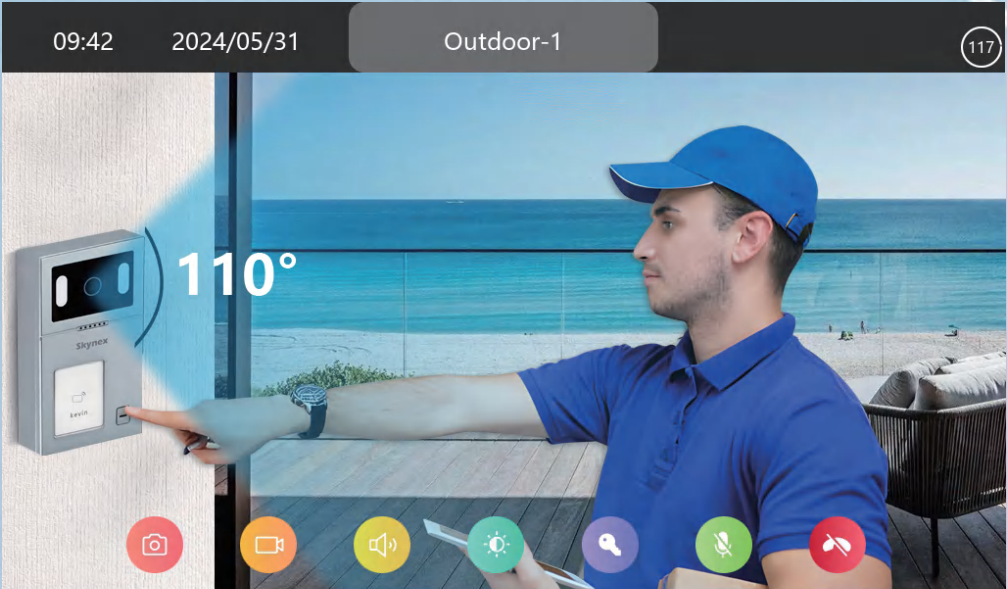

Records




128G



- ☒ Taking Photo or Video Automatically When Calling From Outdoor Unit
- ☒ Storing Video or Photos is Related to Memory Card (Max Support 128G SD Card)

Outdoor Station Installation

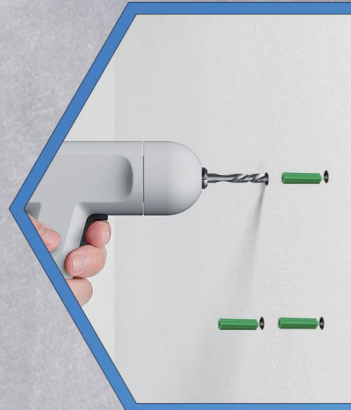

Drilling

Drill screw holes in the location of the wall mounting plate



Fix wall mounting plate


Fix the wall mounting plate to the wall with 2 screws



Install outdoor station

Insert the outdoor station to the plate and fasten it with a screw.

Indoor Monitor Installation

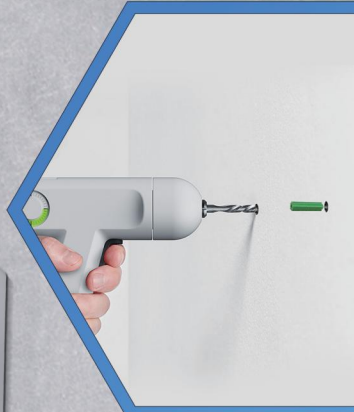

Drilling

In the reserved hole on the wall, drill screw holes in the location of the wall mounting plate



Fix wall mounting plate


Fix the wall mounting plate to the wall with 2 screws



Hook indoor monitor

Hook the indoor monitor to the wall mounting plate tightly


IP System—Villa 1 to 1 Diagram

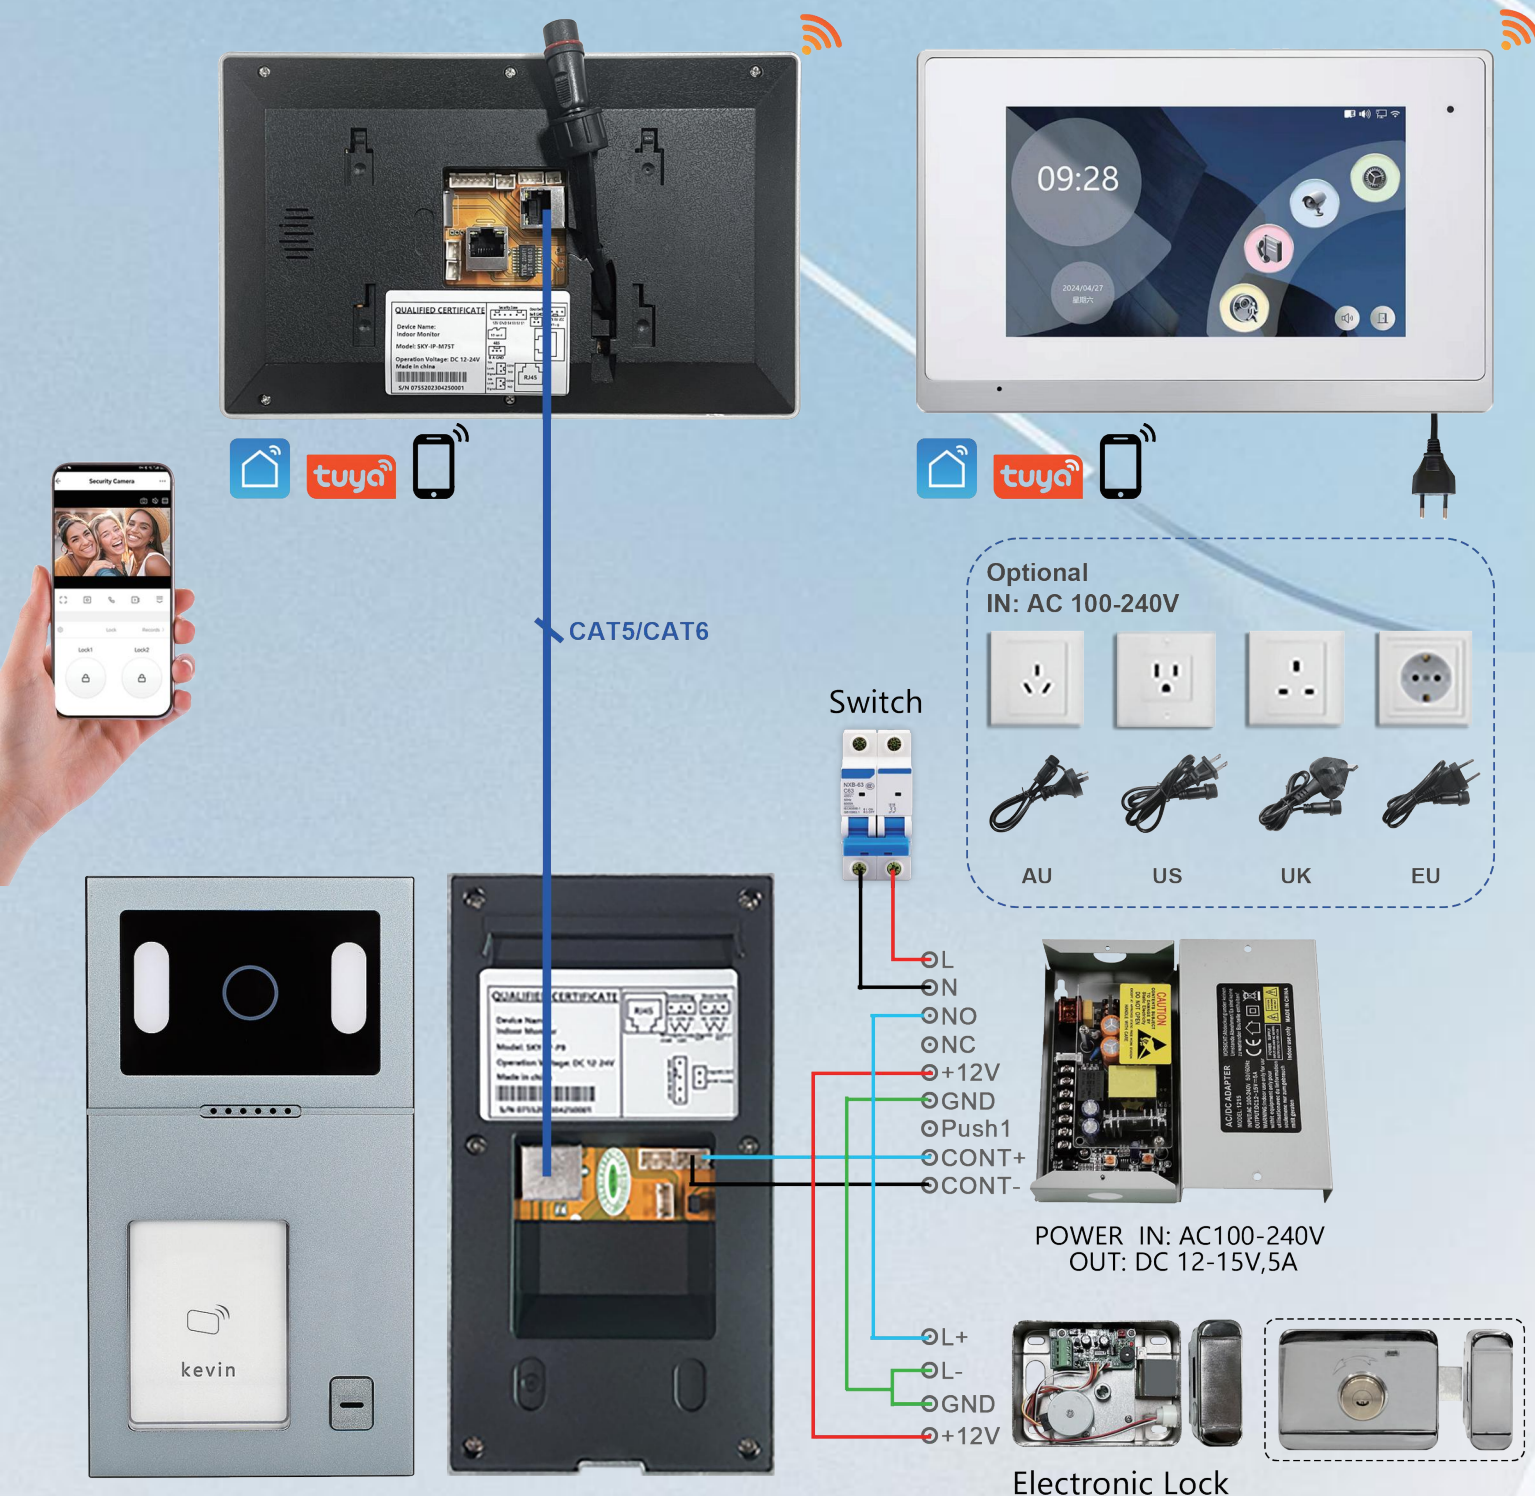

1 Ostation + 1 Indoor Monitor: Connected Directly Through Power Adapter
Indoor Monitor Supply Power To Outdoor Station.


IP System -Villa 1 to 4 Diagram

Up to 4 pcs indoor monitor

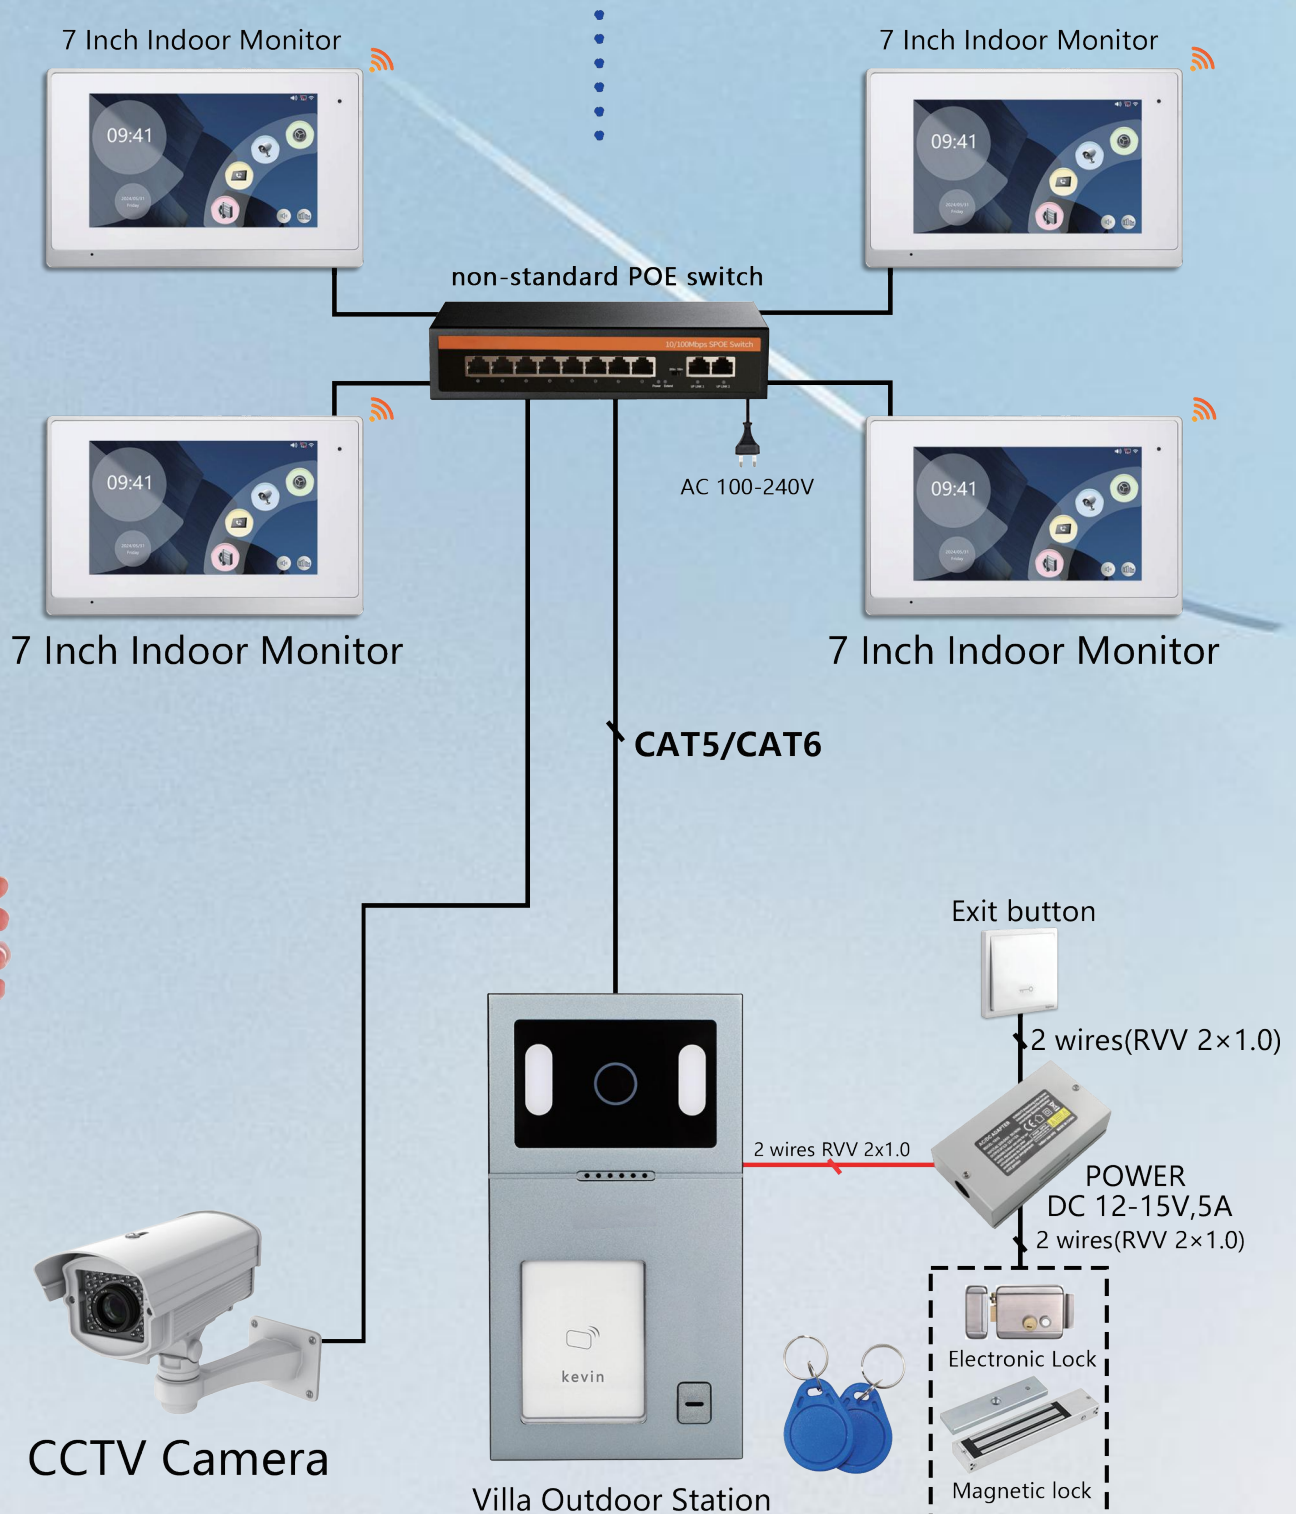

Support Multiple Call Panels, Support Multiple Indoor Monitors;
With Non-standard POE , Support Up to 4 Indoor Monitors outdoor Units.

IP System- Villa 2 to 4 Diagram

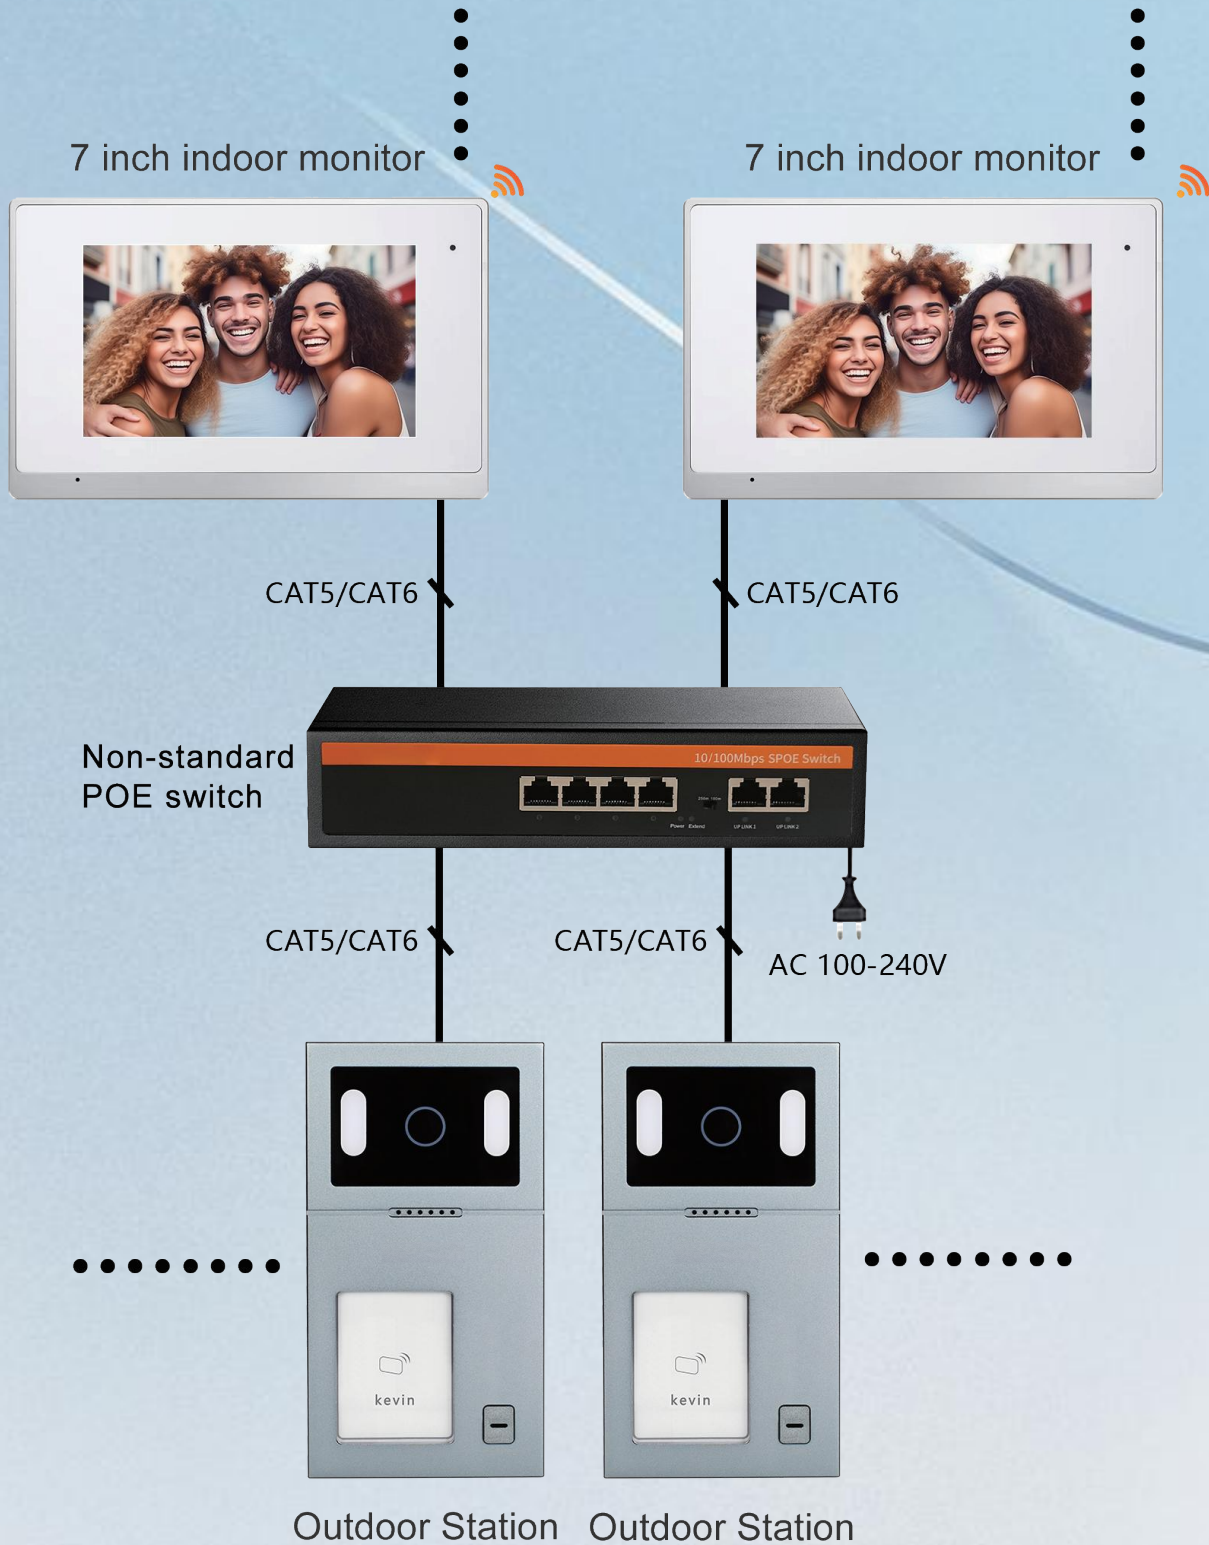

Max System : 2 call panels+ 4 indoor monitors direct series or add POE



Customize Your Logo For Free If Over 200 Pcs



UI and Language Can Be Customized



UI Interface





Multi Language

TFT LCD + Driver Board+Camera Module +Other Semi Parts SKD Solutions for You

We Support SKD Solutions

Assembly Customization

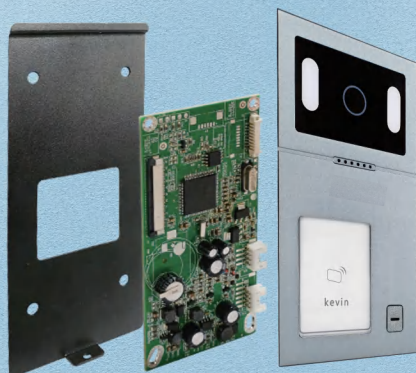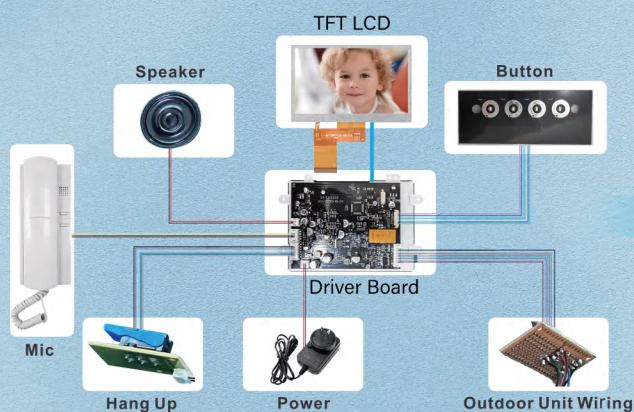

Specifications and Parameters

SPECIFICATIONS

System	Linux System	Network Transmission	TCP/IP Protocol
Connection	RJ45 Network Cable CAT5 / CAT6	Installation	Wall Mounted
Net Weight	1.45 kg	App	Tuya, Smart Life

INDOOR MONITOR

Model	IP-M75T-TUYA
Display Screen	7 inch TFT LCD
Resolution	1024*600 Pixels
Material	ABS Plastic + Acrylic Panel +Full Touchscreen
Power	Non-Standard POE Switch / Power Adapter (DC12-24V)
Working Voltage	DC 12-24V
Working Current	≤500mA
Working Temperature	-10°C~+50°C
Working Humidity	10%~90%
Storage Temperature	-40°C~70°C
Language	English / France/ Russian / Spanish / Turkish/ German/ Dutch,etc.
Color	White+Silver/Black+Gray
Dimensions	230(W)*145(H)*26(D) mm
Installation	Wall mounted

OUTDOOR STATION

Model	IP-P901
Camera Sensor	1/4 CMOS Camera Wide Angle 110°
Definition	1080P 2 Million Pixels
Material	Aluminum Alloy +Acrylic Panel+ Press Button
Power	Non-Standard POE Switch / Power (DC12- 15V)From Monitor
Working Voltage	DC 12-15V
Working Static Current	<200mA
Working Dynamic Current	<250mA
Working Humidity	10%~90%
Working Temperature	-30°C~ +60°C
Maximum Power Consumption	< 5W
Color	White+Silver
Dimensions	165(H)*90(W)*28(D)mm
Installation	Wall-mounted or Embedded

Unboxing Video

<https://youtu.be/NTq5pjtOiys>

No.	Malfunction	Reason	Solution
1	Outdoor station can't call indoor monitor?	1.Indoor Monitor got reset 2.Network cable quality or different standard	"1.In ""Sys Set""-""Address"" ,set address as ""010101010101 2.Use a 568B standard and good quality network cable"
2	"Before installation , it was working well. But after installation, it can not be called?"	1.Network cable quality 2.Insufficient power supply voltage	"1.Use a good quality network cable 2.Use a power adapter with output DC18V-24V,if the network cable is over 40 meters"
3	"When visitor was calling, only one monitor is working"	1.Address is the same	"1.For example, the address of one monitor is ""010101010101"" , and the address of another should be ""010101010102"" . If there are more screens, then the address should be ""010101010103"" , ""010101010104"" and so on."
4	Why can't open the lock?	"1.Don't use a power supply controller 2. Connect the wrong wire"	"1.Use a power supply controller to power and control the lock 2. Please get and check the wiring diagram or video from technical support"